

Thomas Putranto <putranto@ft.undip.ac.id>

Fwd: Review Results: Int J of GEOMATE

1 message

Geomate Editor <editor@geomate.org>

To: putranto@ft.undip.ac.id, wahjukris@yahoo.co.id, keviinnalex@gmail.com

Mon, Jun 4, 2018 at 4:26 PM

Dear Authors,

Thanks for your kind contribution. We have reviewers' comments on your paper (attached). Please send the revised paper by maximum of 4 days upon receiving this email. Please send response to reviewers by authors in separate file. An example of "response to reviewers by authors" is attached. Please use the following link:

<http://www.geomatejournal.com/revised>

Best regards.


--

Dr. Zakaria Hossain (Ph.D. Kyoto Univ.)

Professor, Mie University, Japan
Editor-in-Chief, Int. J. of GEOMATE
Director, Sci. Eng. & Env. Int. Conf.
General Secretary, GEOMATE Int. Soc.
zakaria@bio.mie-u.ac.jp
society@geomate.org
conference@geomate.org
editor@geomatejournal.com
<http://www.koku.bio.mie-u.ac.jp/>
<http://www.geomate.org/>
<http://www.confsee.com/>
<http://www.geomatejournal.com/>

4 attachments

- Example-Response to reviewer by Author.pdf**
19K
- 2018-05-29 06-43PM - 94318.pdf**
21K
- 94318 Thomas.pdf**
940K
- 2018-05-30 06-49PM - 94318.pdf**
24K



Thomas Putranto <putranto@ft.undip.ac.id>

Galley Proof for Issue 51

1 message

Zakaria <zakaria@bio.mie-u.ac.jp>

Sun, Jun 17, 2018 at 10:07 AM

To: Thomas Putranto <putranto@ft.undip.ac.id>, wahjukris@yahoo.co.id, Kevin Alexander <keviinnalex@gmail.com>

Dear Authors,

Attached herewith, please see the galley proof paper for final checking. Please note that this is the final correction and after this checking, you will not be able to change anything later on. As many grammatical errors found, we have done the following corrections:

1. Grammar corrected by Zakaria
2. Formatting correction is done by Zakaria
3. Figures and space including the title of figures and sections corrected by Zakaria
4. Please upload the galley proof file (both WORD and PDF) even no correction

Please do not change the format if any correction. We accept minor correction only (no major corrections). If any correction is needed, please do it on WORD file and then convert it to PDF file. Please send PDF version (Publishable Format including all journal information such as page numbers, vol, and issue number, date of received, revised and accepted etc.) of your galley proof paper by 4 days from the date of this email using the following link.

<http://www.geomatejournal.com/galley>

We accept online submission only. Please make sure that your copyright must be signed by all authors (samples attached).

Best regards.

Prof. Dr. Zakaria Hossain
Editor-in-Chief
International Journal of GEOMATE

3 attachments

sample-signed by all authors.pdf
668K

173-179-94318-Thomas-Nov-2018.docx
1557K

173-179-94318-Thomas-Nov-2018.pdf
929K

Submission Date	2018-05-30 17:49:14
Paper ID number	94318
Paper Title	CONTROLLING SEAWATER INTRUSION BENEATH SEMARANG COASTAL URBAN CITY USING GEORESISTIVITY SURVEY AND HYDROGEOCHEMISTRY DATA
i. Originality	2
ii. Quality	3
iii. Relevance	3
iv. Presentation	4
v. Recommendation	3
Total (sum of i to v)	15

General comments

The paper by Putranto et al. with title: " CONTROLLING SEAWATER INTRUSION BENEATH SEMARANG COASTAL URBAN CITY USING GEORESISTIVITY SURVEY AND HYDROGEOCHEMISTRY DATA " provides an interest hydrogeophysical study regarding coastal aquifers salinization. I have some major comments which I provide below before publication.

General comments

- A revision in English language is essential for the manuscript
- The innovation of this work should be clearly stated in the introduction section.
- Supplement the discussion section in the manuscript providing limitations and future works.
- Provide information from other site around the world and compare with your results.
- Did you calibrate the resistivity data with lithological profiles?

Georesistivity survey: change to geophysical survey

There are many similar studies in literature which are neglected. Additionally, some discussion regarding climate change and coastal aquifer salinization should be included.

Suggested literature

An integrated assessment of seawater intrusion in a small tropical island using geophysical, geochemical and geostatistical techniques. Environ. Sci. Pollut. Res. 21 (11), 7047–7064.

Impact of Climate Change on Salinization of Coastal Water Resources. Water Resources Management. 30:7, 2483–2496.

Seawater intrusion mapping using electrical resistivity tomography and hydrochemical data. An application in the coastal area of eastern Thermaikos Gulf, Greece. Sci Total Environ, 543: 373-387.

Identifying seawater intrusion in coastal areas by means of 1D and quasi-2D joint inversion of TDEM and VES data. Journal of Hydrology 552, pp. 609-619

Mandatory changes

The paper by Putranto et al. with title: " CONTROLLING SEAWATER INTRUSION BENEATH SEMARANG COASTAL URBAN CITY USING GEORESISTIVITY SURVEY AND HYDROGEOCHEMISTRY DATA " provides an interest hydrogeophysical study regarding coastal aquifers salinization. I have some major comments which I provide below before publication.

General comments

- A revision in English language is essential for the manuscript
- The innovation of this work should be clearly stated in the introduction section.
- Supplement the discussion section in the manuscript providing limitations and future works.
- Provide information from other site around the world and compare with your results.
- Did you calibrate the resistivity data with lithological profiles?

Georesistivity survey: change to geophysical survey

There are many similar studies in literature which are neglected. Additionally, some discussion regarding climate change and coastal aquifer salinization should be included.

Suggested literature

An integrated assessment of seawater intrusion in a small tropical island using geophysical, geochemical and geostatistical techniques. Environ. Sci. Pollut. Res. 21 (11), 7047–7064.

Impact of Climate Change on Salinization of Coastal Water Resources. Water Resources Management. 30:7, 2483–2496.

Seawater intrusion mapping using electrical resistivity tomography and hydrochemical data. An application in the coastal area of eastern Thermaikos Gulf, Greece. Sci Total Environ, 543: 373-387.

Identifying seawater intrusion in coastal areas by means of 1D and quasi-2D joint inversion of TDEM and VES data. Journal of Hydrology 552, pp. 609-619

Suggested changes

The paper by Putranto et al. with title: " CONTROLLING SEAWATER INTRUSION BENEATH SEMARANG COASTAL URBAN CITY USING GEORESISTIVITY SURVEY AND HYDROGEOCHEMISTRY DATA " provides an interest hydrogeophysical study regarding coastal aquifers salinization. I have some major comments which I provide below before publication.

General comments

- A revision in English language is essential for the manuscript
- The innovation of this work should be clearly stated in the introduction section.
- Supplement the discussion section in the manuscript providing limitations and future works.
- Provide information from other site around the world and compare with your results.
- Did you calibrate the resistivity data with lithological profiles?

Georesistivity survey: change to geophysical survey

There are many similar studies in literature which are neglected. Additionally, some discussion regarding climate change and coastal aquifer salinization should be included.

Suggested literature

An integrated assessment of seawater intrusion in a small tropical island using geophysical, geochemical and geostatistical techniques. Environ. Sci. Pollut. Res. 21 (11), 7047–7064.

Impact of Climate Change on Salinization of Coastal Water Resources. Water Resources Management. 30:7, 2483–2496.

Seawater intrusion mapping using electrical resistivity tomography and hydrochemical data. An application in the coastal area of eastern Thermaikos Gulf, Greece. Sci Total Environ, 543: 373-387.

Identifying seawater intrusion in coastal areas by means of 1D and quasi-2D joint inversion of TDEM and VES data. Journal of Hydrology 552, pp. 609-619

Reviewer's E-mail (Remove before sending to author)

Submission Date	2018-11-06 20:38:09
Paper ID number	44804
Paper Title	SAFETY CLIMATE ASSESSMENT OF FURNITURE INDUSTRY: A CASE STUDY
i. Originality	3
ii. Quality	4
iii. Relevance	4
iv. Presentation	4
v. Recommendation	5
Total (sum of i to v)	20
General comments	This paper presents some interesting result on SAFETY CLIMATE ASSESSMENT OF FURNITURE INDUSTRY: A CASE STUDY. It is a good quality paper. It can be recommended for journal publication after improvement.
Mandatory changes	Please check the attachment and improve the content.
Upload file (if any)	44804 Novie.pdf
Reviewer's E-mail (Remove before sending to author)	

CONTROLLING SEAWATER INTRUSION BENEATH SEMARANG COASTAL URBAN CITY USING GEORESISTIVITY SURVEY AND HYDROGEOCHEMISTRY DATA

* Thomas Triadi Putranto¹, Wahju Krisna Hidajat¹, and Kevin Alexander¹

¹Geological Engineering Department, Faculty of Engineering, Diponegoro University, Indonesia

*Corresponding Author, Received: 00 Oct. 2018, Revised: 00 Nov. 2018, Accepted: 00 Dec. 2018

ABSTRACT: As the largest areas in Central Java Province, Semarang has experience coastal inundation from local flood inundation, river flood and sea water tide flood. Moreover, the city experiences long-term seawater intrusion. Investigation of seawater intrusion is a must to control the actual condition. Georesistivity survey will provide a subsurface condition that combines the hydrogeochemistry data in controlling seawater intrusion. Resistivity data was collected using the Wenner array. The RMS error computed for iterations of the resistivity value varying from 7.7 to 40.4% with the total depth up to 39.6 m depth in the inverse model resistivity section. Based on the geoelectrical profile, 5 of 10 locations, i.e. SMG-1, SMG-2, SMG-3, SMG-5, and SMG-7 conducted very low resistivity value. The maximum Electrical Conductivity/EC value was 8,810 $\mu\text{S}/\text{cm}$. Integrated georesistivity survey and hydrogeochemical analyses provided the study area into three groups related to the seawater intrusion which are uninfluenced, moderate influenced, and high influenced.

Keywords: Semarang, Seawater intrusion, Georesistivity survey, Wenner array, Hydrogeochemistry

1. INTRODUCTION

Coastal zones often contain some of the most densely populated areas in Indonesia. [1] stated that the availability of flat land, communications arteries, easy sea transportation, permeable soils, and high productivity of organic matter explain this current situation. The coastal zone is subject to more severe complex issues than most other land related to the freshwater demand. The primary use of Semarang coastal areas is housing up to 47% as shown in Table 1.

Table 1. Landuse and the percentage of area [2]

No	Variable	Area (km^2)	Width (%)
1	Sea water	1.1856	1.02
2	Freshwater	0.6484	0.56
3	Bush	1.3029	1.13
4	Ponds	2.7969	2.42
5	Building	1.1339	0.98
6	Forest	0.0227	0.02
7	Garden	16.121	13.93
8	Housing	54.2003	46.85
9	Swamp	0.0767	0.07
10	Grass	18.3077	15.82
11	Paddy field	11.5	9.94
12	Bare land	0.3202	0.28
13	Moor	8.0817	6.99
	Total	115.698	100

Semarang, as one of the coastal cities in the central north of Java Island, is growing fast, in particular in the industrial and commercial sectors. From a regional development perspective, the position of Semarang is of high strategic value for the economic activities not only for the centre of

North Java Island but also for Jakarta as the capital city of Indonesia. This area is supported by an international seaport and a national scale airport (Figure 1). The dynamic condition in Semarang is triggering the increase of economic development for surrounding areas such as from Jakarta in the west to Surabaya in the east.

As the largest areas in Central Java Province, Semarang has experience coastal inundation from local flood inundation, river flood and sea water tide flood. The main factor leading to the land subsidence in Semarang is the groundwater abstraction to fulfil water demands [3]. As population growth and urban development in Semarang City increase, it then leads the clean water quality and its lowering groundwater level [4]. Groundwater conservation zone of unconfined aquifer in Semarang into 4 zones, i.e. secure, vulnerable, critical, and damaged zone based on groundwater quality and its lowering groundwater level was developed by [5]. Moreover, the city experiences long-term seawater intrusion [6-8].

Based on the problem statement, investigation of seawater intrusion is a must to control the actual condition. Georesistivity survey will provide a subsurface condition that combines the hydrogeochemistry data in controlling seawater intrusion. Moreover, hydrogeochemistry also will provide the groundwater facies to play a significant role in classifying and assessing water quality.

2. METHODOLOGY

2.1 Georesistivity survey

The principle of geophysical prospection was to determine, based on measurements taken on the ground, the physical characteristics of the bedrock and to deduce information on its makeup [9]. Georesistivity surveys were the most widely used geophysical methods in the island and coastal environments. Electrical methods were usually used to locate brackish or saline waters, although they can yield some geologic information as well [10].

The Wenner array was applied to define profiling resistivity anomalies as an impact of seawater intrusion. The four-point electrodes were arranged constant, 10 m, and moved along profiles up to 180 m length as shown in Figure 1. There were around 10 locations in the georesistivity survey (Figure 2) to address subsurface condition based on resistivity values. The RES2DINV program was applied to provide the two-dimensional (2D) electrical imaging survey. The results from geoelectrical survey were plotted in the form of inverse model resistivity section which provided an estimated image of the subsurface geology. The data inversion was calculated with the least squares inversion method [11].




Fig. 1 Electrode configuration in Wenner array [11]

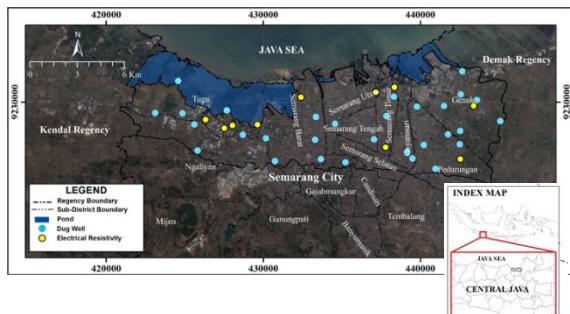


Fig. 2 Georesistivity survey (yellow dots) and hydrogeological mapping points (blue dots).

2.2 Hydrogeochemistry analysis

The hydrogeochemistry analysis was one of the most fundamental aspects of groundwater studies. Knowledge of processes that control natural water composition was needed for groundwater management [12].

The assessment of groundwater quality is possible to understand the change in quality due to rock-water interaction or impacts of anthropogenic influence [13].

The major

There were thirty (30) groundwater samples were analysed to define hydrogeochemistry characteristics in the study area. The field campaign was accomplished in July 2017. The pH and electrical conductivity of groundwater sample values were measured by using WtW profile pH 3210 and Cond 3310 during the field campaign respectively. While the major of cations (Na^+ , K^+ , Ca^{2+} , and Mg^{2+}) and anions (Cl^- , SO_4^{2-} , and HCO_3^-) were analysed in the Geological Agency laboratory. These ions can be plotted on some graphs such as Stiff and Piper diagrams. The Stiff system showed the differences or similarities in water and changes in water composition. Piper diagram depicted the groundwater facies as well as identified the hydrochemistry composition in different classes. Indeed, pH and EC value were employed to assess groundwater quality. Major cations were analysed using Atomic Absorption Spectroscopy. Chloride and sulphate were evaluated using argentometric and turbidimetric respectively. Meanwhile, bicarbonate was examined using titrimetric.

3 RESULTS AND DISCUSSION

3.1 Results of georesistivity survey

Georesistivity survey conducted the distribution of seawater intrusion based on the very low resistivity values [14-16]. Resistivity data was collected using the Wenner array. The RMS error computed for iterations of the resistivity value varying from 7.7 to 40.4% with the total depth up to 39.6 m in the inverse model resistivity section.

Based on the geoelectrical profile (Figure 3), 5 of 10 locations, i.e. SMG-1, SMG-2, SMG-3, SMG-5, and SMG-7 conducted very low resistivity value. SMG-1 which is located in the north of Semarang was showing a very low resistivity range 0.702-1.26 Ωm up to 25 m depth. The second level of low resistivity below 1 Ωm was up to 7.5 m depth which is located in the distance around 125 m. Meanwhile, in SMG-2, the profiling resistivity provided the resistivity range between 0.195-1.05 Ωm . It was obviously seawater intrusion occurred starting in the depth of 2.5 m. Image SMG-3 is indicating very low resistivity, 0.00863-0.457 Ωm , starting the depth of 18.5 m. This situation is likely similar to the location of SMG-5 which is indicating seawater intrusion in the depth of 18.5 with the range of resistivity value around 0.0593-0.787 Ωm . Moreover, SMG-7 has two level of seawater intrusion, i.e. the first level, the resistivity showed below 1 Ωm and around 20 m depth. Furthermore, in the distance of around 120 m, seawater intrusion occurs in the depth of starting 2.5 m with the resistivity value a range of 0.194-0.661 Ωm .

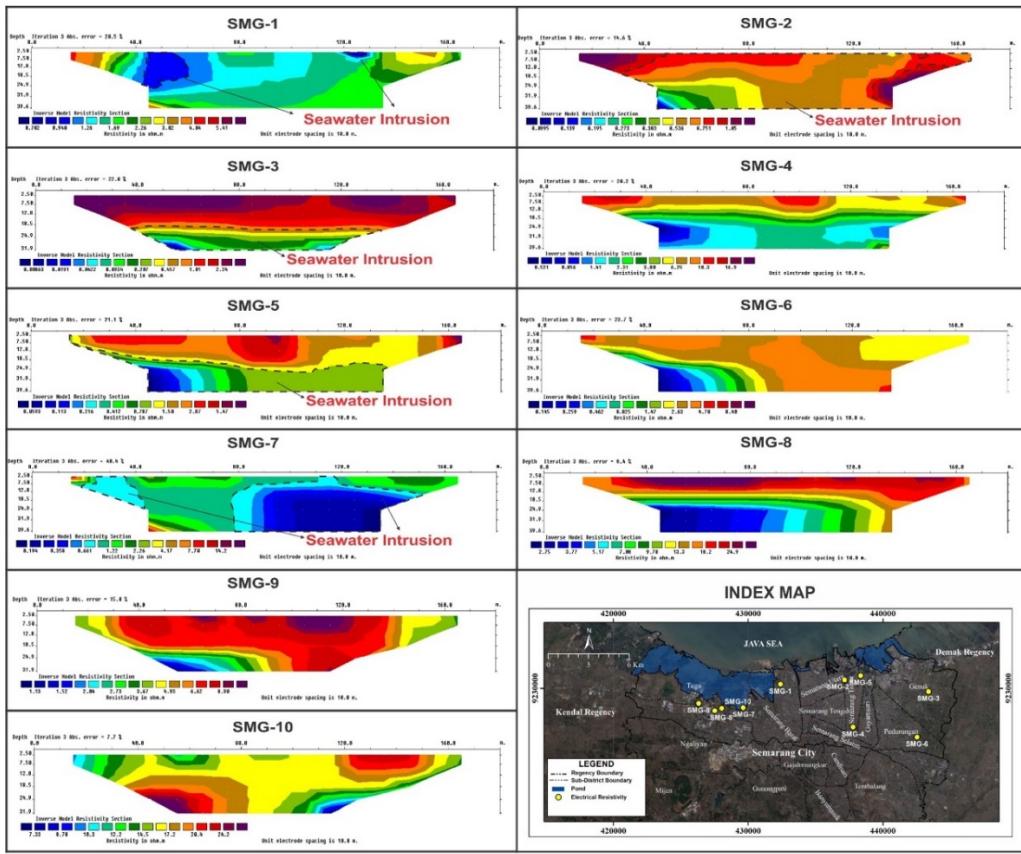


Fig. 3 Inverse model resistivity section of georesistivity survey.

3.2 Hydrogeochemistry analyses

The hydrogeochemistry content was analysed to define the groundwater quality as well as groundwater facies. The maximum Electrical Conductivity/EC value was 8,810 $\mu\text{S}/\text{cm}$ as shown in Table 2. It is located in SG-25 (Genuk Sub-District) around 3 km from the Java Sea coastline in the northeast of Semarang. A higher value of EC indicates unsuitable for drinking water. Water has a salty taste and indicates there was seawater intrusion occurred in this area.

Table 3. Summary statistics of ions content

Variable	EC ($\mu\text{S}/\text{cm}$)	pH	DO (mg/L)	Salinity (mg/L)
Min	458	6.22	0.28	100
Ave	1,637	7.19	0.71	803
Max	8,810	8.02	1.07	4,900
SD	1,606	0.34	0.19	916

Moreover, the values of Na^{+1} and Cl^{-1} are around 1,555.6 mg/L and 2,374.2 mg/L respectively. Table 3 shows the value of both physical and chemical content of groundwater sample analyses. Obviously, those are the highest values. Another indication of seawater intrusion in this area is the value of Salinity which was up to 4,900 mg/L. In the north of Semarang, EC values resulted above 2,000

$\mu\text{S}/\text{cm}$. While in the centre of Semarang, the range of EC values was 750-1,500 $\mu\text{S}/\text{cm}$. In this region, groundwater from dug wells was still possible for consuming. Meanwhile, in the south, the EC values are up to 1,500 $\mu\text{S}/\text{cm}$. It means groundwater is visible as drinking water resources. Moreover, pH value is the range of 6.221-8.025. These values are acceptable for standard water drinking.

Stiff diagram (Figure 4) shows the dominant cations and anions distribution with concentration represented in electrical equivalent (meq/L). The major cations concentration in groundwater are in the decreasing order as $\text{Na}^{+1} > \text{Ca}^{+2} > \text{Mg}^{+2} > \text{K}^{+1}$. The major anions concentration is in the decreasing order as $\text{HCO}_3^{-1} > \text{Cl}^{-1} > \text{SO}_4^{-2}$. Sodium (Na^{+1}) was predominant cation in the north (SG-16) and the north-east of Semarang (SG-24 and SG-25) while the chloride was the predominant anion in those regions. Seawater intrusion in the coastal plains dominates the chloride ion concentration. It can be concluded that the most predominant water type in the north-east and the north of Semarang areas was the Na-Cl water type. While Ca^{+2} was distributed predominant cation of the groundwater samples in the south of Semarang (SG-12, SG-13, SG-18, SG-19). While HCO_3^{-1} was the predominant anion in the south of Semarang, it means that the most predominant water type in the south of Semarang

was Ca-HCO₃ water type. HCO₃⁻¹ ion is mainly derived from the CO₂ present in the atmosphere.

The Piper diagram shows the electrical equivalent percentage (meq%) composition of different ions to define the groundwater facies and to determine the water type. The Piper diagram displays in three parts: two trilinear diagrams along the bottom and one diamond-shaped diagram in the middle. The trilinear diagrams show the percentage concentration of cations (Na⁺¹ + K⁺¹, Ca⁺², Mg⁺²) and anions (HCO₃⁻¹, Cl⁻¹, SO₄⁻²) in each sample. The data points of the two trilinear diagrams are extended onto a diamond-shaped which lie perpendicular to the third axis in each triangle.

According to the Piper diagram (Figure 5), there are five groups: alkaline earth water predominantly hydrogencarbonate (SG-12), alkaline earth water with higher alkaline content predominantly hydrogencarbonate (SG-2, SG-5, SG-6, SG-7, SG-9 SG-10, SG-11, SG-14, SG-15, SG-18, SG-19, SG-23 and SG-30), alkaline earth water with higher alkaline content predominantly sulphate/chloride (SG-4), alkaline water predominantly (hydrogen) carbonate (SG-1, SG-3, SG-8, SG-20, SG-21, SG 22, SG-26, SG-28 and SG-29) and alkaline water predominantly sulphate-chloride or predominantly chloride (SG-16, SG-17, SG-24, SG-25 and SG-27).

Table 3. Major ions content in the groundwater of Semarang coastal urban city

Code	EC ($\mu\text{S}/\text{cm}$)	pH	DO (mg/L)	Salinity (mg/L)	Na ⁺¹ (mg/L)	K ⁺¹ (mg/L)	Ca ⁺² (mg/L)	Mg ⁺² (mg/L)	Cl ⁻¹ (mg/L)	HCO ₃ ⁻¹ (mg/L)	SO ₄ ⁻² (mg/L)
SG-01	2,460	7.566	0.55	1,300	387	53.1	83.8	49.6	452.5	826	6.3
SG-02	1,079	6.84	0.43	500	91.3	22.1	96.8	31.5	99.8	469	14.5
SG-03	1,359	7.352	0.58	600	261	21.0	50.6	6.5	114.9	681	12.8
SG-04	2,340	6.961	0.54	1,200	241	21.8	251.1	20.9	333.2	514	274
SG-05	751	6.772	0.78	300	40.7	11.3	84.0	24.3	87.8	270	22.0
SG-06	679	6.846	0.89	300	40.4	17.1	79.7	15.8	53.5	311	15.2
SG-07	747	6.781	0.63	300	72.5	8.2	66.1	15.3	91.4	259	19.7
SG-08	845	7.161	0.91	400	123	18.7	49.2	13.1	87.4	431	24.1
SG-09	681	7.169	0.49	300	53.6	11.4	48.7	14.2	62.2	312.2	21.4
SG-10	491	6.221	0.68	200	43.5	8.4	40.5	10.9	45.5	161.8	17.5
SG-11	622	7.464	0.54	200	53.9	2.6	60.4	9.8	49.1	321.3	6.5
SG-12	728	7.184	0.74	300	32.1	3.7	102	19.9	29.5	414.8	17.8
SG-13	568	6.916	0.7	200	47.9	4.5	52.2	16.0	48.7	271.2	15.5
SG-14	458	7.372	0.97	100	30.1	7.6	59.0	10.6	23.5	262.1	11.1
SG-15	906	7.764	1.07	400	83.4	12.2	47.1	47.0	67.0	449	19.8
SG-16	3,900	7.311	0.96	2,100	653	57.9	84.3	45.0	934	521	37.3
SG-17	2,680	7.371	0.74	1,400	400	24.4	110	39.7	633	402	46.2
SG-18	1,002	7.234	0.89	400	82.1	6.9	84.9	42.9	59.5	530	27.7
SG-19	834	7.182	0.84	300	70.3	11.1	96.8	18.1	40.7	460	23.6
SG-20	1,530	7.174	0.28	700	156	28.6	68.5	31.2	117	780	19.5
SG-21	1,890	7.612	0.91	900	353	20.3	37.0	56.3	176	948	22.5
SG-22	1,203	7.135	0.34	600	145	24.0	99.0	18.1	82.6	610	0.0
SG-23	956	6.978	0.87	400	85.9	10.5	105	12.9	55.1	488	0.0
SG-24	2,720	8.025	0.66	1,400	489	27.9	59.0	45.9	533.5	726	0.0
SG-25	8,810	7.23	0.66	4,900	1,556	63.5	168	135	2,374	1,041	0.0
SG-26	1,006	7.507	0.74	400	189	8.8	46.2	1.6	53.5	524	0.0
SG-27	3,710	7.319	0.83	2,000	747	25.6	57.9	37.0	701.1	907	57.9
SG-28	1,456	7.015	0.48	700	178	46.3	112.6	23.2	84.2	745	32.3
SG-29	1,448	7.263	0.91	700	200	9.3	97.4	23.2	147.6	531	68.9
SG-30	1,248	7.075	0.68	600	105	10.7	114.5	33.8	87.8	523	61.9

4 CONCLUSION

Semarang Coastal Urban City which is directly adjacent to the Java Sea resulted that this area is potentially experiencing the seawater intrusion. The intrusion of seawater resulted in the decrease in groundwater quality. Integrated georesistivity survey and hydrogeochemical analyses provided the study area into three groups related to the seawater intrusion which are uninfluenced, moderate influenced, and high influenced as shown in Figure 6.

The uninfluenced areas to seawater intrusion are depicted by the lowering EC value below 1,500 $\mu\text{S}/\text{cm}$ as shown in Table 4, the water type both alkaline earth water and alkaline water with predominantly hydrogencarbonate and resistivity

value above 5 Ωm . These areas are mainly located in the south, west, and south-east of Semarang.

The moderately influenced areas have EC value in the range of 1,500-2,500 $\mu\text{S}/\text{cm}$, the water type of alkaline water predominantly hydrogencarbonate, and indicating seawater to intrusion in depth from 2.5-25 m. The areas of moderately influence are in the city centre and the north of Semarang urban coastal city.

The high influenced areas of seawater intrusion show that EC value above 2,500 $\mu\text{S}/\text{cm}$, the water type alkaline water predominantly chloride, and seawater occur in starting depth of 2.5 m. These areas are mainly located in the north and the north-east of Semarang.

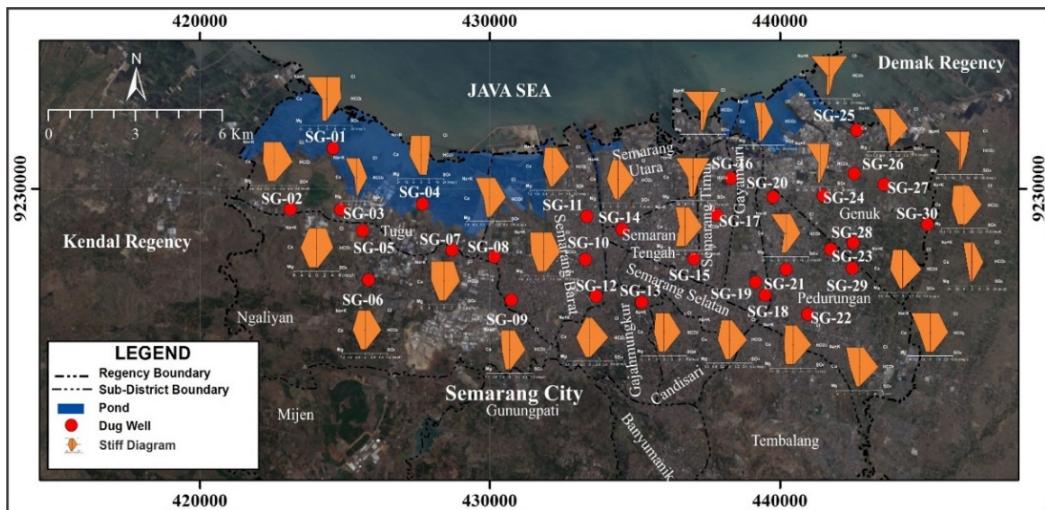


Fig. 4 Stiff diagram showing the distribution of major cations and anions content.

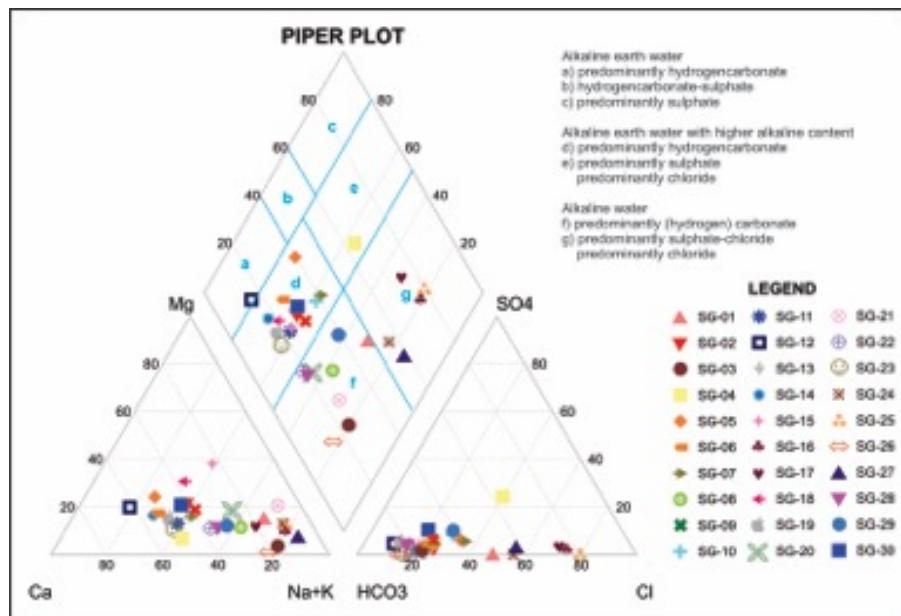


Fig. 5 Piper plot showing the groundwater facies.

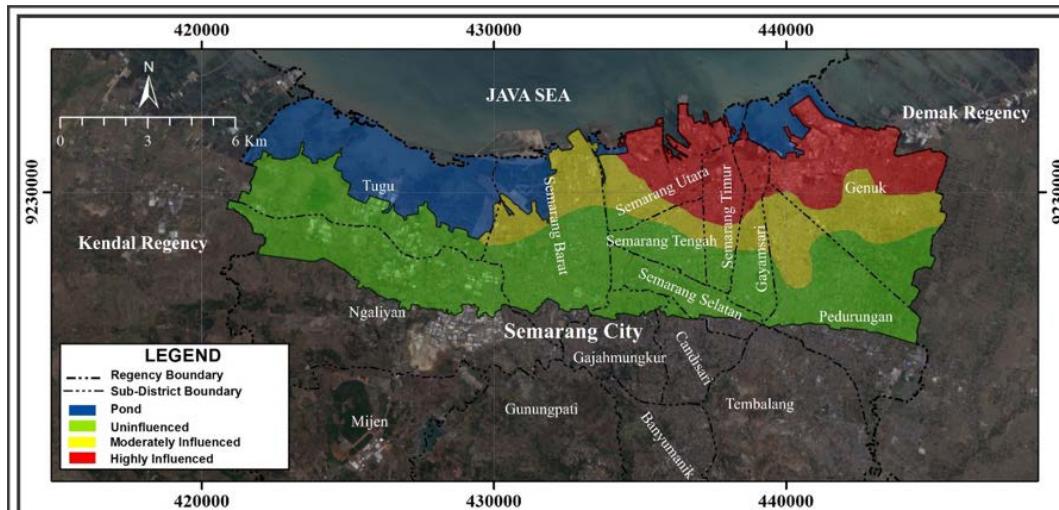


Fig. 6 Seawater intrusion zones

Table 4. Parameters of seawater intrusion in Semarang coastal urban area

Parameters	Seawater Intrusion Zones		
	Uninfluenced	Moderately Influenced	Highly Influenced
EC	< 1,500 µS/cm Alkaline earth water (predominantly hydrogencarbonate) Alkaline earth water with higher alkaline content (predominantly hydrogencarbonate and predominantly sulphate/ chloride)	1,500-2,500 µS/cm Alkaline water (predominantly hydrogen carbonate)	>2,500 µS/cm Alkaline water (predominantly sulphate- chloride/predominantly chloride)
Water type	Alkaline water (predominantly (hydrogen) carbonate)		
Depth of Seawater Intrusion	-	2.5-25 m (SG-1), >20 m(SG-3), and >2.5 m(SG-7)	>2.5 m (SG-2 and SG- 5)

5. ACKNOWLEDGEMENT

This research is fully supported by Faculty of Engineering, Diponegoro University and acknowledged to the Ministry of Research, Technology, and Higher Education of the Republic of Indonesia (RISTEKDIKTI) for the supported research funding.

6 REFERENCES

- [1] Custodio, E. and Bruggeman, G.A. Groundwater problems in coastal areas. Belgium: Imprimerie Bietlot Frères, Fleurus, Belgique, 1998, pp.1-596.
- [2] BPS Statistics Semarang Municipality. Semarang Municipality in Figures 2017, Semarang, 201, pp. 1-128.
- [3] Marfai, M.A. and King, L. Coastal flood management in Semarang, Indonesia. Environ. Geol. 55, 2008, pp. 1507–1518.
- [4] Rahmawati, N. Groundwater Zoning as Spatial Planning in Semarang City, Delta Competition Report (Innovative Solutions for the Delta: Innovative Ideas for Deltas Cities to Respond to Climate Change Challenges in the Complex Urban Environment). Delta Alliance and Royal Haskoning, Rotterdam, The Netherlands, 2010, pp 29-37.
- [5] Putranto, T.T., Hidajat, W.K., and Susanto, N. 2016. Developing groundwater conservation zone of unconfined aquifer in Semarang, Indonesia. Proceeding of 2nd International Conference on Tropical and Coastal Region Eco Development 2016. pp.1-9
- [6] Nugroho, B.P. Groundwater characteristics in Semarang city. Bachelor Thesis, Faculty of Geography, Universitas Gadjah Mada, Yogyakarta, Indonesia, unpublished, 1989, pp. 1-80.
- [7] Purnama, I.L.S. 2005. Distribution of Saltwater in the soil in coastal plain: Case Study Semarang city, PhD Thesis, Faculty of Geography, Universitas Gadjah Mada, Yogyakarta, Indonesia, unpublished. Pp. 1-120.
- [8] Rahmawati, N., Vuillaume, J.F., Purnama, I.L.S. Salt intrusion in Coastal and Lowland areas of Semarang City. Journal of Hydrology 494, 2013, pp.146–159.
- [9] Bear, J, Cheng, A.H.D, Sorek, S., Ouazar, D., and Herrera I. 1999. Seawater intrusion in coastal aquifer-Concept, Methods and Practices, Dordrecht: Springer Science+Business+Media, B.V.
- [10] Dahlin, T. 1996. 2D resistivity surveying for environmental and engineering applications. First Break, 14(7), pp. 275-283.
- [11] Kirsch, R. (Ed.). 2009. Groundwater Geophysics A Tool For Hydrogeology 2nd Edition, Springer-Verlag Berlin Heidelberg
- [12] Zaporezec, A. 1972. Graphical interpretation of water-quality data. Ground Water 10 2 3243.
- [13] Sadashivaiah C, Ramakrishnaiah R., Ranganna, G. 2008. Hydrochemical Analysis and Evaluation of Groundwater Quality in Tumkur Taluk, Karnataka State, India. International Journal of Environmental Research and Public Health, 5 (3), pp. 158-164.
- [14] Satriani, A., Antonio L., Vito, I, and Vincenzo, L. Geoelectrical surveys for characterization of the Coastal Saltwater Intrusion in Metropantum Forest Reserve (Southern Italy). International Journal of Geophysics, Vol. 2012, 2012, Article ID 238478, pp. 1-8
- [15] Kruse, S., Brudzinski, M, and Gelb, T. Use of Electrical and Electromagnetic Techniques to Map Seawater Intrusion Near the Cross-Florida Barge Canal. *Environmental & Engineering Geoscience*, v. IV, no. 3, 1998,

pp. 331-340.

- [16] Mogren, S. Saltwater Intrusion in Jizan Coastal Zone, Southwest Saudi Arabia, Inferred from Geoelectric Resistivity Survey. International Journal of Geosciences, 6, 2015, pp. 286-297.

Copyright © Int. J. of GEOMATE. All rights reserved,
including the making of copies unless permission is
obtained from the copyright proprietors.
