

# Salatiga\_groundwater\_basin,\_Central\_Java\_Province,\_Indonesia. pdf

*by*

---

**Submission date:** 16-Jan-2019 09:41AM (UTC+0700)  
**Submission ID:** 1064636640  
**File name:** Salatiga\_groundwater\_basin,\_Central\_Java\_Province,\_Indonesia.pdf (902.81K)  
**Word count:** 4062  
**Character count:** 22302

5

## Factor weighting in DRASTIC modelling for assessing the groundwater vulnerability in Salatiga groundwater basin, Central Java Province, Indonesia

D A Kesuma<sup>1,5</sup>, P Purwanto<sup>1,2</sup>, T T Putranto<sup>1,3</sup>, and T P D Rahmani<sup>4</sup>

3

<sup>1</sup>Master Program in Environmental Science, School of Postgraduate Studies, Diponegoro University, Semarang 50241, Indonesia

<sup>2</sup>Department of Chemical Engineering, Faculty of Engineering, Diponegoro University, Semarang 50275, Indonesia

<sup>3</sup>Department of Geological Engineering, Faculty of Engineering, Diponegoro University, Semarang 50275, Indonesia

<sup>4</sup>Department of Biological Science, Faculty of Science and Engineering, Islamic State University of Walisongo, Semarang 50185, Indonesia

Type the author addresses here

da.kesuma@gmail.com

**Abstract.** The increase in human population as well as area development in Salatiga Groundwater Basin, Central Java Province, will increase the potency of groundwater contamination in that area. Groundwater quality, especially the shallow groundwater, is very vulnerable to the contamination from industrial waste, fertilizer/agricultural waste, and domestic waste. The first step in the conservation of groundwater quality is by conducting the mapping of the groundwater vulnerability zonation against the contamination. The result of this research was groundwater vulnerability map which showed the areas vulnerable to the groundwater contamination. In this study, groundwater vulnerability map was assessed based on the DRASTIC Method and was processed spatially using Geographic Information System. The DRASTIC method is used to assess the level of groundwater vulnerability based on weighting on seven parameters, which are: depth to the water table (D), recharge (R), aquifer material (A), soil media (S), topography (T), impact of vadose zone (I), and hydraulic conductivity (C). The higher the DRASTIC Index will result in the higher vulnerability level of groundwater contamination in that area. The DRASTIC Indexes in the researched area were 85 – 100 (low vulnerability level), 101 -120 (low to moderate vulnerability level), 121 – 140 (moderate vulnerability level), 141 – 150, (moderate to high vulnerability level), and 151 – 159 (high vulnerability level). The output of this study can be used by local authority as a tool for consideration to arrange the policy for sustainable area development, especially the development in an area affecting the quality of Salatiga Groundwater Basin.

### 1. Introduction

Water on earth, either surface or groundwater, is very sensitive towards the changing in land utilization, especially the groundwater. The freshwater groundwater can be polluted by contaminants from human activity waste. The contaminants can be originated from agricultural, industrial, as well as domestic waste from the human settlement. Therefore, the decreasing quality of groundwater caused by



Content from this work may be used under the terms of the Creative Commons Attribution 3.0 licence. Any further distribution of this work must maintain attribution to the author(s) and the title of the work, journal citation and DOI.

Published under licence by IOP Publishing Ltd

contaminations needed to be urgently treated since almost half of the world's populations are still consuming the groundwater for drinking and other activities [1].

Salatiga groundwater basin is mostly located in the KEDUNGSEPUR (Kendal, Ungaran, Semarang, Salatiga, Purwodadi) area, which is one of the eight strategic areas included in the Central Java Province Spatial Plans (Rencana Tata Ruang Wilayah (RTRW)) Number 21 Year 2003 juncto Central Java Province Local Regulation (PERDA) Number 6 Year 2010, regarding the Central Java Province Spatial Plans. This area is planned to be the center of national economic growth for the local income equalization as well as to decrease the economic imbalance [2]. The Salatiga Groundwater Basin Area is also located on the strategic track which connecting the cities of Jogjakarta, Solo, and Semarang (JOGLOSEMAR). The strategic location of the Salatiga Groundwater Basin Area will open the opportunities to the development of the area, especially for the agricultural, trade and service, industrial as well as tourism sectors development [3].

The establishment of that strategic area was aimed to create the safe, comfortable, productive, and sustainable area so that the social, economic, and environmental aspects could be harmonized. However, its existence can provoke the uncontrollable population growth and land conversion, and thus will give rise to the environmental issues. As a picture, the land utilization in the City of Salatiga for the five-year range from 2010 to 2014, had undergone settlement sector development (increased for 120,40 Ha), trade sector development (increased for 4,48 Ha), industrial sector development (increased for 14,55 Ha), and non-agricultural area utilization. In general, the alteration of above land utilization was the conversion from non-irrigated agricultural land to mixed plantation land [4]. The alteration of land utilization to support the human activities, such as the settlement and industrial development, the usage of fertilizer for agriculture, the construction of the sanitary landfill, are the potential hazards which can influence the groundwater quality and increase the potency of groundwater contamination [5].

Thus, the assessment of aquifer vulnerability is very crucial to be conducted as the early attempt to protect the quality of groundwater. Zabet (2002) described vulnerability as the aquifer system sensitivity to be deteriorated caused by external influence [6]. The groundwater vulnerability concept is assuming that physical environment has the ability to protect the groundwater against the impact caused by the nature and human activities. The Earth materials can be acted a natural filter for the flowing through contaminants [7, 8].

The term "vulnerability of groundwater to contamination" was first used by Margat (1968). The groundwater vulnerability is used to the term natural protection against contamination. Groundwater vulnerability to contamination was defined by the National Research Council (1993) as "the tendency or likelihood for contaminants to reach a specified position in the groundwater system after introduction at some location above the uppermost aquifer" [9].

Many groundwater vulnerability assessment techniques had been developed in the last few decades, such as overlay and index method, statistics, as well as computer based process. Groundwater vulnerability assessment method used in this study was a DRASTIC Method. The DRASTIC Method is one of the overlay and index methods which can be broadly applied for several aquifers, such as basaltic rock, sedimentary rock, carbonaceous rock, hard rock, and coastal aquifers [1].

The objective of this research was to determine the aquifer vulnerability level against the contamination using the DRASTIC Method as well Geographic Information System to map the contamination-vulnerable areas in Salatiga Groundwater Basin.


## 2. Study Area

Salatiga groundwater basin is one of 19 groundwater basins across administrative areas regencies / cities in Central Java province. Administratively, most of Salatiga Groundwater Basin is included in the administrative area of Salatiga and Semarang regency as well as a small portion of Boyolali regency. Geographically, Salatiga groundwater basin is located approximately between 110° 27'56.81"- 110°32'4.64" East longitude and 7°17'-7°17.23 'South Latitude with an altitude of 220 to 1,450 meters above Mean Sea Level. Salatiga groundwater basin lies mostly in the slopes of Mount Merbabu and

small mountains, among others: Gajah Mungkur, Telomoyo, and Payung Rong [10]. The average annual Rainfall of the last 5 years is about 2,198.33 mm/year [11, 12, 13].

Aquifer system at Salatiga groundwater basin is unconfined and confined aquifer. The rocks that make up the unconfined aquifer usually consisting of tuffaceous sandstone originating from volcanic activity of Mount Merbabu. In the southern part of the study area, the depth of the lower unconfined aquifer is at a depth of about 15-20 meters below local ground level surface, ie starting from the slopes of Mount Merbabu up toward the northeast. In the eastern part of the study area, the position of the bottom of the unconfined aquifer reaches a depth of 30 meters below local ground level surface.

The confined aquifer layer is composed of tuffaceous sandstone layers alternating with lahar and lava. Based on observations from some locations of spring, there are aquifer through the cracks. The confined aquifer is generally located at 43 up to 81 meters below local ground level surface on the slopes of Mount Merbabu and increasingly shallow eastward around the District of Wonosegoro. In the northern part of the research area, the upper confined aquifer depth is ranging from 18 meters below local ground level surface.

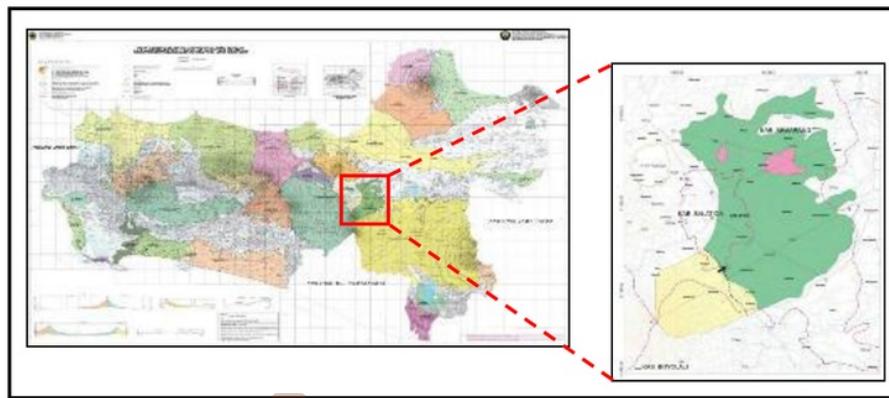

**Figure 1.** The location of study area.

### 3. Methodology

The DRASTIC Method of groundwater vulnerability level assessment uses seven parameters, which are: depth to the water level (D), recharge (R), aquifer material (A), soil media (S), topography (T), impact of vadose zone (I), and hydraulic conductivity (C). Depth to the water level data was taken from the depth measurements of the resident's dug wells in October-December 2016. Recharge Value was determined by considering the precipitation, evapotranspiration, and runoff levels in studied area between 2011 until 2015. Recharge level was calculated using meteoric water balance analysis. The aquifer materials, soil media, and impact of vadose zone parameters were obtained from the borehole correlation and interpretation log results as well as from geoelectrical survey results data taken from Energy and Mineral Resources Department of Central Java Province [10]. The topography of study area was prepared based on the Shuttle Radar Topographical Mission (SRTM) satellite data. While the hydraulic-conductivity data was obtained from the rock permeability tests in the study area. Each of the DRASTIC Parameters was weighted according to its level of importance, whereas each of the components from every parameters was rated based of its level of importance. Depth to the water table is weighted 5, recharge is weighted 4, aquifer material is weighted 3, soil media is weighted 2, topography is weighted 1, impact of vadose zone is weighted 5, and hydraulic conductivity is weighted 3. All seven parameters were then converted into digital format via Geographic Information System. By using ArcGIS 10.2, each of the components of the DRASTIC parameters were rated and weighted according to Aller,et.al., 1987 [14].

The next step was to calculate the DRASTIC Index using raster calculator with the formula below:

$$DI = \frac{7}{Dr Dw + Rr Rw + Ar Aw + Sr Sw + Tr Tw + Ir Iw + Cr Cw} \quad (1)$$

With  $r$  = rating and  $w$  = weight.

The DRASTIC Index were classified into:


**Table 1.** Vulnerability Ranges Classification [15]

| No | Vulnerability Level | DRASTIC Index |
|----|---------------------|---------------|
| 1  | Very low            | < 80          |
| 2  | Low                 | 80 - 100      |
| 3  | Low to moderate     | 101 - 120     |
| 4  | Moderate            | 121 - 140     |
| 5  | Moderate to high    | 141 - 150     |
| 6  | High                | 151 - 180     |
| 7  | Very high           | 181 - 200     |
| 8  | Extremely high      | > 200         |

#### 4. Result and discussion

##### 4.1. Hydrogeologic Parameters

**4.1.1. Depth to groundwater level.** Depth to groundwater level is the minimum distance of ground surface from the water table. This is a crucial factor, since the condition of the depth to groundwater level will affect the time needed for the contaminants to reach the water table. The depth to groundwater level data was obtained from the measurements of 70 dug wells from October to December 2016. Depth to groundwater level was the shallowest at 1 meter below ground surface until up to > 30 meter below the local ground surface. The parameter of depth to groundwater level has a weight of 5 (Figure 2 and Table 2).

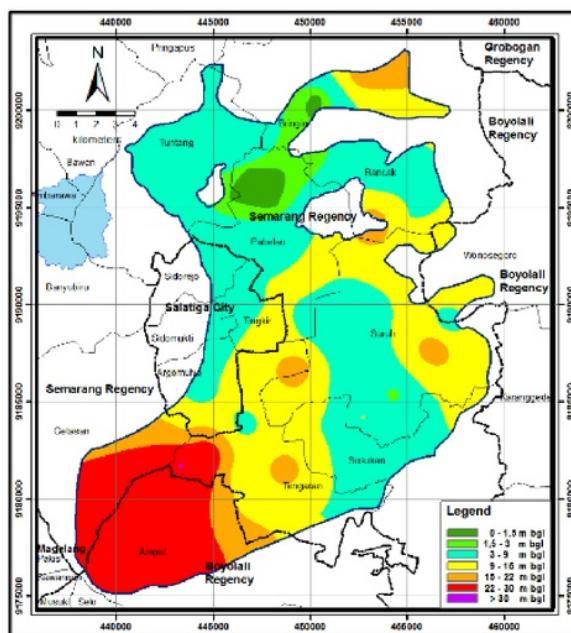


**Figure 2.** Depth to groundwater level.

**Table 2.** Value of depth to groundwater level.

| No | Depth Interval (m) | Rating | Weight | Index |
|----|--------------------|--------|--------|-------|
| 1  | 0 - 1.5            | 10     | 5      | 50    |
| 2  | 1.5 - 3            | 9      | 5      | 45    |
| 3  | 3 - 9              | 7      | 5      | 35    |
| 4  | 9 - 15             | 5      | 5      | 25    |
| 5  | 15 - 22            | 3      | 5      | 15    |
| 6  | 22 - 30            | 2      | 5      | 10    |
| 7  | > 30               | 1      | 5      | 5     |

9

**4.1.2. Net Recharge.** The net recharge describes the amount of rainwater absorbed into the ground and reached the aquifer. The rainwater absorbed in the ground through the soil pores was assumed to be able to help transporting the contaminants vertically toward the groundwater level and horizontally inside the aquifer. Based on the calculation results, the recharge values of the studied areas, which were the recharge zone, were 0-51 mm/year, 52-102 mm/year, 103-178 mm/year, 179-254 mm/year, and 254-1,092 mm/year. The recharge parameter was weighted 4. The parameter score measurement, recharge amount and recharge parameter map can be viewed at Table 3 and Figure 3.

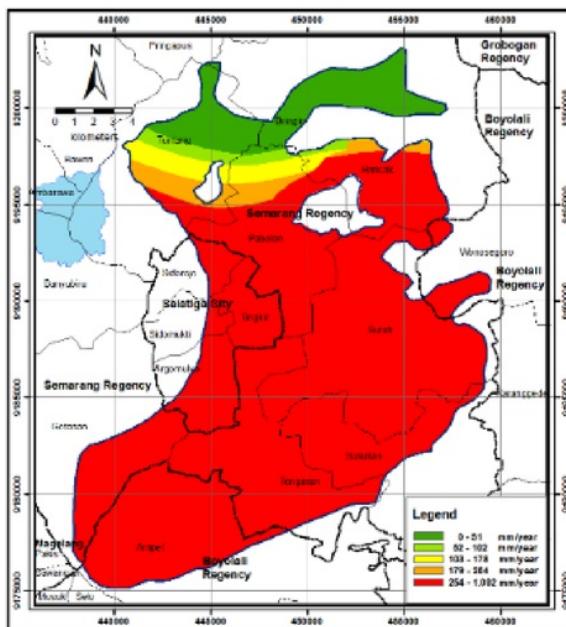


**Figure 3.** Net recharge.

**Table 3.** Score Measurement for Recharge Parameter.

| No | Recharge (mm/year) | Rating | Weight | Index |
|----|--------------------|--------|--------|-------|
| 1  | 0-51               | 1      | 4      | 4     |
| 2  | 52-102             | 3      | 4      | 12    |
| 3  | 103-178            | 6      | 4      | 24    |
| 4  | 179-254            | 8      | 4      | 32    |
| 5  | 254-1,092          | 9      | 4      | 36    |

30

*4.1.3. Aquifer Media.* Aquifer media type has a role in controlling the movements of the contaminants inside the water saturated rocks (aquifer). The rocks assembling the aquifer in the study area were from Merbabu volcano. Based on the correlation results via drilling data and subsurface estimation with geoelectrical method, the type of rocks functioned as an aquifer was interpreted as Tuffaceous Sandstone Alternate with Volcanic Breccia and Fractured Andesite Lava. Aquifer media parameter weighted 3. The aquifer media measurement and the distribution maps can be seen in Table 4 and Figure 4.

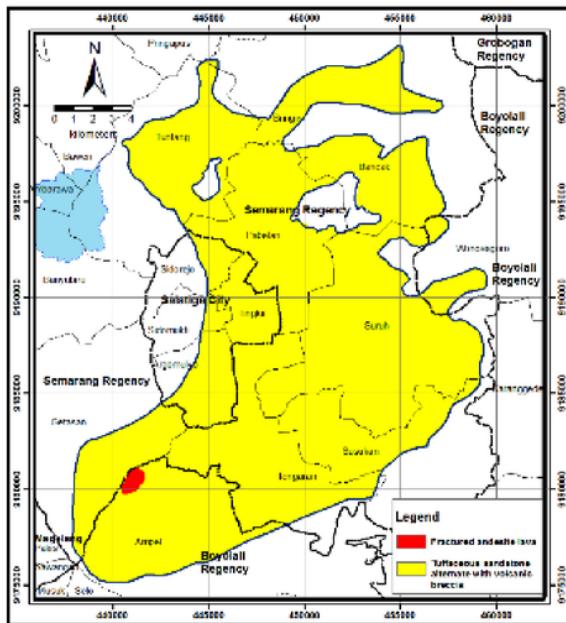


**Figure 4.** Aquifer Media

**Table 4.** Score Calculation for the Aquifer Media Parameter

| No | Aquifer Media  | Rating | Weight | Index |
|----|--|--------|--------|-------|
| 1  | Tuffaceous Sandstone Alternate with Volcanic Breccia | 6      | 3      | 18    |
| 2  | Fractured Andesite Lava                              | 3      | 3      | 9     |

15

*4.1.4. Soil Media.* Soil media is the uppermost of the unsaturated water zone which not undergone weathering. Based on the field observation and the soil permeability value of some soil samples in the study area, it can be interpreted that the soil media consisted of sandy loam and sand. Soil media parameter was weighted 2 points. The calculation of soil media parameter score as well as the distribution maps of soil media parameter can be viewed in Table 5 and Figure 5.

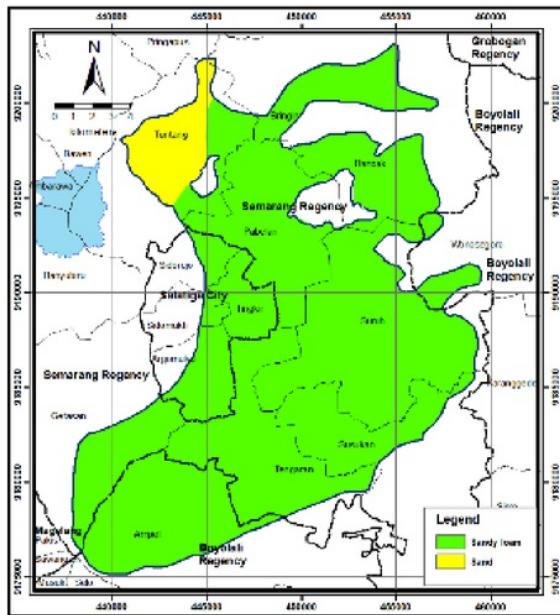


**Figure 5.** Soil Media.

**Table 5.** The Calculation of Soil Media Parameter Score.

| No | Soil Media | Rating | Weight | Index |
|----|------------|--------|--------|-------|
| 1  | Sandy Loam | 6      | 2      | 12    |
| 2  | Sand       | 9      | 2      | 18    |

**4.1.5. Topography.** Steepness of an area which allows low slope for high infiltration of pollutant along with rainwater and steep slopes for low infiltration. The topography of study area was prepared based on the Shuttle Radar Topographical Mission (SRTM) satellite data [16]. Based on the slope maps, the studied areas have varies slope between 0 until > 18%. Slope parameter was weighted 1 point. While the Slope Distribution based on the interval and the score calculation for the slope can be seen on Table 6 and Figure 6.

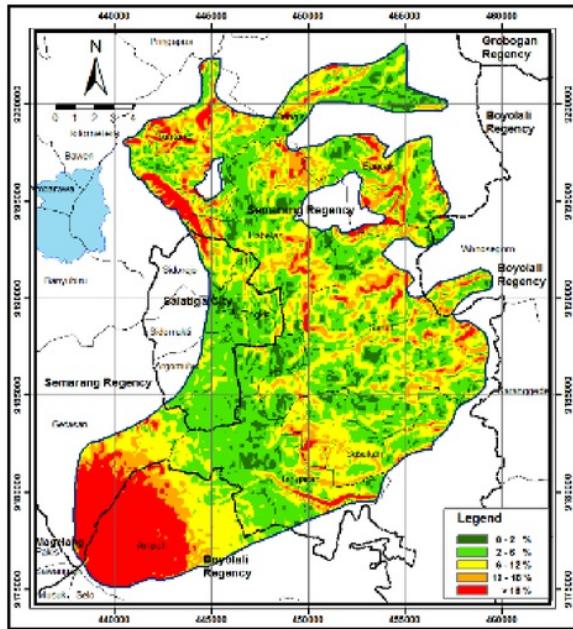


**Figure 6.** Topography.

**Table 6.** Slope Value.

| No | Slope (%) | Rating | Weight | Index |
|----|-----------|--------|--------|-------|
| 1  | 0 - 2     | 10     | 1      | 10    |
| 2  | 2 - 6     | 9      | 1      | 9     |
| 3  | 6 - 12    | 5      | 1      | 5     |
| 4  | 12 - 18   | 3      | 1      | 3     |
| 5  | > 18      | 1      | 1      | 1     |

8

**4.1.6. Impact of Vadose Zone.** The Vadose (unsaturated) zone is the zone located above the groundwater level. Based on the subsurface data according to the borehole log and geoelectrical data obtained from the Central Java Province Energy and Mineral Resources Department, it can be interpreted that the rocks on the water unsaturated (vadose) zone generally composed by sand and gravel with silt and clay content. Those materials resulted from the weathering of tuffaceous sandstone alternate with volcanic breccia. This parameter was weighted 5 points. The calculation of water unsaturated zone score as well as the distribution maps of that parameter can be viewed in Table 7 and Figure 7.

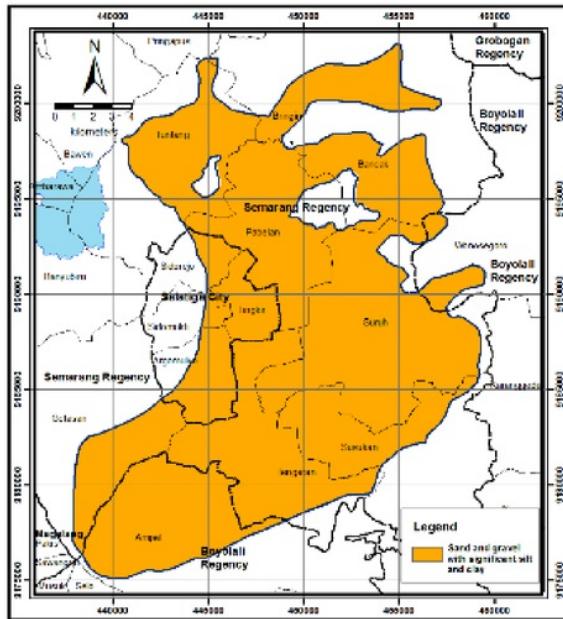


**Figure 7.** Vadose zone media

**Table 7.** The Calculation of Vadose Zone Media Parameter

| No | Vadose zone media                              | Rating | Weight | Index |
|----|--|--------|--------|-------|
| 1  | Sand and gravel with significant silt and clay | 6      | 5      | 30    |

4.1.7. *Hydraulic Conductivity.* Hydraulic conductivity is the ability of the aquifer to transmit the water and to control the average speed of groundwater flow. Groundwater flow velocity also controls the speed of transport of contaminants in the aquifer. The hydraulic-conductivity data was obtained from the rock permeability tests in the study area. This parameter was weighted 3 points. The calculation of hydraulic conductivity score as well as the distribution maps of that parameter can be viewed in Table 8 and Figure 8.

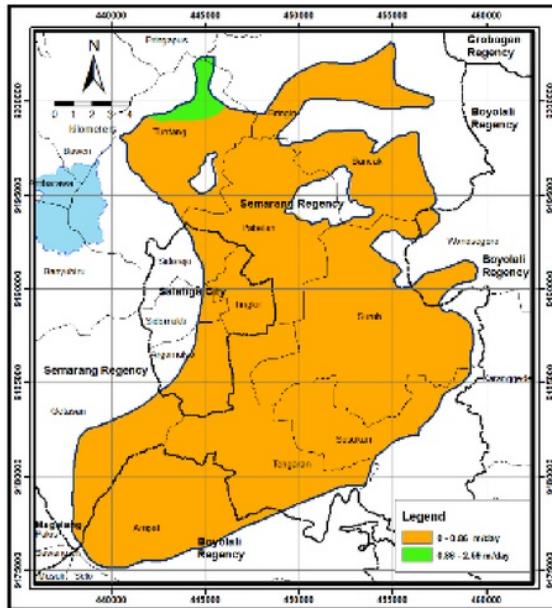


**Figure 8.** Hydraulic Conductivity

**Table 8.** The Calculation of Hydraulic Conductivity Parameter

| No | Hydraulic Conductivity (m/day) | Rating | Weight | Index |
|----|--------------------------------|--------|--------|-------|
| 1  | 0 - 0,86                       | 1      | 3      | 3     |
| 2  | 0,86 - 2,59                    | 2      | 3      | 6     |

#### 4.2. DRASTIC Vulnerability Assessment

In this study, the minimum value of DRASTIC Vulnerability Index in Salatiga Groundwater Basin was 85 – 159. The values of DRASTIC Vulnerability Index were classified into five vulnerability levels, which are: Low (85 – 100), Low to moderate (101 – 120), Moderate (121 – 140), Moderate to High (141 – 150), and High (151 – 159). Here is the division of the groundwater vulnerability based on the calculation according to the weight of each parameter and rating applied (Table 9) along with a map of groundwater vulnerability (figure 9).

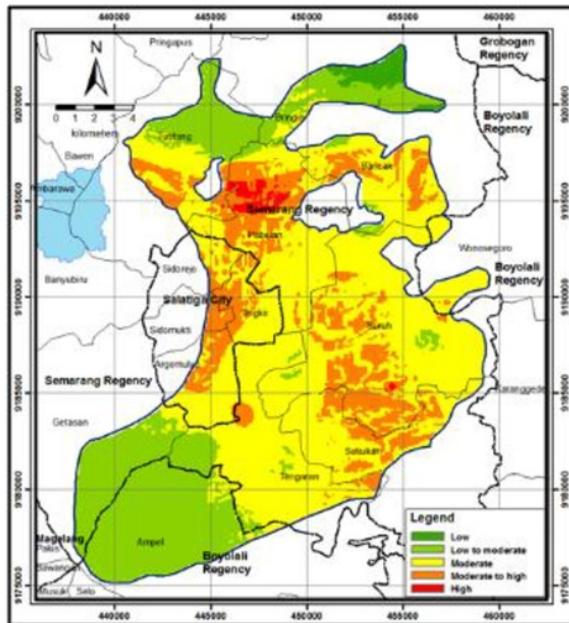

**Figure 9.** Vulnerability Map.

**Table 9.** The Vulnerability Class and the Distribution Area.

| No | DRASTIC Index | Vulnerability Class | Characteristic [17]  | Distribution Area  |
|----|---------------|---------------------|--|--|
| 1  | 85 – 100      | Low                 | Only vulnerable to conservative pollutants in the long term when continuously and widely discharged or leached   | <u>Semarang Regency</u> :<br>The southern part of Bringin District, small part of the northern of Bancak District  |
| 2  | 101 – 120     | Low to Moderate     | Only vulnerable to conservative pollutants in the long term when continuously and widely discharged or leached until Vulnerable to some pollutants but only when continuously discharged or leached. | <u>Semarang Regency</u><br>The southern part of Getasan district, small part of the southern of Tengaran district, the northern part of Tuntang district, the southern part of Bringin district, small part of the northern of Bancak district<br><u>Boyolali Regency</u> : Ampel district |
| 3  | 121 – 140     | Moderate            | Vulnerable to some pollutants but only when continuously discharged or leached.  | <u>Semarang Regency</u><br>Tuntang, Pabelan, Bancak, Suruh, Tengaran districts and small part of the southern of Bringin district.<br><u>Boyolali Regency</u>  |

| No | DRASTIC Index | Vulnerability Class | Characteristic [17]   | Distribution Area  |
|----|---------------|---------------------|---|--|
| 4  | 141 – 150     | Moderate to high    | Vulnerable to some pollutants but only when continuously discharged or leached. Until vulnerable to many pollutants (except those strongly absorbed or readily transformed) in many pollutants scenarios. | The small part of the western of Wonoségoro district<br><u>Salatiga City</u><br>Sidorejo, Tingkir, and Argomulyo districts<br><u>Semarang Regency</u><br>Tuntang, Pabelan, Bancak, Suruh, and Tengaran districts<br><u>Salatiga City</u><br>Sidorejo, Sidomukti, Tingkir, and Argomulyo districts<br><u>Semarang Regency</u> |
| 5  | 151 – 159     | High                | Vulnerable to many pollutants (except those strongly absorbed or readily transformed) in many pollutants scenarios.   | Most of the northern part of the Pabelan district and small part of the southern of Suruh district   |

Basically, the level of vulnerability in the study area are influenced by all the local hydrogeological factors. However, the most influential factor is the depth of groundwater level and rocks in the unsaturated (vadose) zone. Based on the groundwater vulnerability maps, land use zoning can be determined. In principle, the area with the high vulnerability of aquifers against contamination should be reserved for the low potency of land utilization, whereas in areas with low vulnerability against contamination can earmarked for land utilization with high potency of contamination, such as industrial activities, waste disposal and so on.

## 5. Conclusion

Based on the DRASTIC method analysis, the levels of groundwater vulnerability against contamination in Salatiga Groundwater Basin were classified into: Low, Low to Moderate, Moderate, Moderate to High, and High level. The high level of vulnerability zone was found in Pabelan District, Semarang Regency. The main factor affecting the high level of vulnerability zone was the very shallow depth to the water table, which was 0.6 – 1.5 meters depth from the local groundwater surface. The shallow position of groundwater table will cause contaminants to easily reach the groundwater, so that the potency of groundwater contamination in the area will be increased.

## 6. Acknowledgement

The authors wish to acknowledge PUSBINDIKLATREN BAPPENAS for funding this research as well as Zaky and Yusrizal from Geological Engineering Department, Diponegoro University for assisting in the field.

## References

- [1] Brindha, K., and Elango, L., 2015. Cross comparison of five popular groundwater pollution vulnerability index approaches. *Journal of Hydrology* **524** (2015) 597–613, available at web site [www.elsevier.com/locate/jhydrol](http://www.elsevier.com/locate/jhydrol), accessed at 24 July 2016.
- [2] Zuswanto, Musiyam, and Kaeksi, W., 2014. Analisis Spasial Pertumbuhan Ekonomi Kawasan Kedungsapur (Kendal, Demak, Ungaran, Kota Semarang, Kota Salatiga Dan Purwodadi) Provinsi Jawa Tengah Tahun 2008-2012. Available at <http://eprints.ums.ac.id/29011/>. Accessed at 28 September 2016.

- [3] Wijaya, B. and Atmanti, H.D., 2006. Analisis Pengembangan Wilayah Dan Sektor Potensial Guna Mendorong Pembangunan Di Kota Salatiga. Available at [http://eprints.undip.ac.id/16953/1/Analisis\\_Pengembangan\\_Wilayah\\_Dan\\_Sektor....by\\_Bayu\\_Wijaya\\_%26\\_Hastarini\\_Dwi\\_Atmani\\_\(OK\).pdf](http://eprints.undip.ac.id/16953/1/Analisis_Pengembangan_Wilayah_Dan_Sektor....by_Bayu_Wijaya_%26_Hastarini_Dwi_Atmani_(OK).pdf). Accessed at 9 August 2016.
- [4] Tusianto, A.Taryono, and Sigit, A.A., 2015. Evaluasi Kesesuaian Penggunaan Lahan Kota Salatiga Tahun 2010-2014 Terhadap Rencana Tata Ruang Wilayah Kota Salatiga Tahun 2010-2030. Publikasi Karya Ilmiah. Available at <http://eprints.ums.ac.id/38672/1/NASKAH%20PUBLIKASI.pdf>. Accessed at 28 September 2016.
- [5] Al-Hanbali A. and Kondoh A., 2008. Groundwater vulnerability assessment and evaluation of human activity impact (HAI) within the Dead Sea groundwater basin, Jordan. *Hydrogeol J* 2008; **16**:499–510.
- [6] Lathamani, R., Janardhana, M.R., Mahalingam, B., and Suresha, S., 2015. Evaluation of Aquifer Vulnerability Using Drastic Model and GIS: A Case Study of Mysore City, Karnataka, India. *International conference on water resources, coastal and ocean Engineering (ICWRCOE 2015). Aquatic Procedia* 4 (2015) 1031–1038. Available at web site [www.sciencedirect.com](http://www.sciencedirect.com). Accessed at 22 December 2016.
- [7] Todd, D. K., 1980. Groundwater hydrology (2nd Ed.). New York, NY: Wiley.
- [8] Vrba, J. and Zoporozec, A., 1994. Guidebook on Mapping Groundwater Vulnerability. International Contributions to Hydrogeology. Volume 16. Hannover.
- [9] Rahman A., 2008. A GIS based DRASTIC model for assessing groundwater vulnerability in shallow aquifer in Aligarh, India. *Appl Geogr* 2008; **28**:32–53. Available at web site [www.elsevier.com/locate/apgeog](http://www.elsevier.com/locate/apgeog), accessed at 24 July 2016.
- [10] Energy and Mineral Resources Department of Central Java Province, 2015. Studi Sistem Jaringan Sumur Pantau Pada CAT Rawapening dan CAT Salatiga. Semarang.
- [11] Central Bureau of Statistics, Boyolaly Regency, 2016. Boyolali Regency in Figures. Catalog: 1102001.3309. Boyolali.
- [12] Central Bureau of Statistics, Semarang Regency, 2016. Semarang Regency in Figures. Catalog: 1102001.3322. Ungaran.
- [13] Central Bureau of Statistics, Salatiga City, 2016. Salatiga City in Figures. Catalog: 1102001.3373. Salatiga.
- [14] Aller, L., Bennet, T., Lehr, J. H., Petty, R. J., and Hackett, G., 1987. “DRASTIC: A Standardized System for Evaluating Ground Water Pollution Potential Using Hydrogeologic Settings,” US EPA Report 600/287/035, U.S. Environmental Protection Agency.

# Salatiga\_groundwater\_basin,\_Central\_Java\_Province,\_Indon..

## ORIGINALITY REPORT



## PRIMARY SOURCES

- 1 Atiqur Rahman. "A GIS based DRASTIC model for assessing groundwater vulnerability in shallow aquifer in Aligarh, India", *Applied Geography*, 2008 1 %  
Publication
- 2 [www.innspub.net](http://www.innspub.net) 1 %  
Internet Source
- 3 [www.sciepub.com](http://www.sciepub.com) 1 %  
Internet Source
- 4 Submitted to Malaviya National Institute of Technology 1 %  
Student Paper
- 5 Submitted to Tallahassee Community College 1 %  
Student Paper
- 6 K. Brindha, L. Elango. "Cross comparison of five popular groundwater pollution vulnerability index approaches", *Journal of Hydrology*, 2015 1 %  
Publication
- 7 Nasher , Ghunaim Shamsan Ahmad. 1 %

"Hydrogeological , Hydrogeochemical and Environmental Evaluation of the Intercatchment Area between Wadi Shueib and Zarqa River , Jordan", University of Jordan, 2007.

Publication

- 
- 8 Weerawut Tiankao, Srileert Chotpantarat. "Risk assessment of arsenic from contaminated soils to shallow groundwater in Ong Phra Sub-District, Suphan Buri Province, Thailand", Journal of Hydrology: Regional Studies, 2018

Publication

1 %

- 
- 9 Shobharam Ahirwar, J. P. Shukla. "Assessment of Groundwater Vulnerability in Upper Betwa River Watershed using GIS based DRASTIC Model", Journal of the Geological Society of India, 2018

Publication

1 %

- 
- 10 Ghosh, Amit, Ashwani Kumar Tiwari, and Santosh Das. "A GIS based DRASTIC model for assessing groundwater vulnerability of Katri Watershed, Dhanbad, India", Modeling Earth Systems and Environment, 2015.

Publication

<1 %

- 
- 11 scholar.ufs.ac.za:8080

Internet Source

<1 %

- 
- 12 Imen Hentati. "A statistical and geographical

information system analysis for groundwater intrinsic vulnerability: a validated case study from Sfax-Agareb, Tunisia : A statistical and GIS analysis for groundwater intrinsic vulnerability", Water and Environment Journal, 06/17/2010

<1 %

Publication

13

Alwathaf, Yahia, and Bouabid El Mansouri. "Assessment of Aquifer Vulnerability Based on GIS and ARCGIS Methods: A Case Study of the Sana'a Basin (Yemen)", Journal of Water Resource and Protection, 2011.

<1 %

Publication

14

Almasri, Mohammad N., Jagath J. Kaluarachchi, Said Ghabayen, Ammar Jarrar, Mac McKee, Anan Jayyousi, and Amjad Aliewi. "Assessment of Groundwater Vulnerability to Nitrate Contamination in Gaza Strip, Palestine", Impacts of Global Climate Change, 2005.

<1 %

Publication

15

Submitted to Birla Institute of Technology

<1 %

Student Paper

16

[www.essentiasolution.com](http://www.essentiasolution.com)

<1 %

Internet Source

17

Samira Akhavan. "Conditioning DRASTIC model to simulate nitrate pollution case study: Hamadan–Bahar plain", Environmental Earth

<1 %

# Sciences, 10/20/2010

Publication

|    |  |      |
|----|--|------|
| 18 | <a href="http://infonet.assumption.ca">infonet.assumption.ca</a>   | <1 % |
| 19 | Parisa Asadi, Seiyed Mossa Hosseini, Behzad Ataie-Ashtiani, Craig T. Simmons. "Fuzzy vulnerability mapping of urban groundwater systems to nitrate contamination", <i>Environmental Modelling &amp; Software</i> , 2017    | <1 % |
| 20 | Pedreira, R., A. Kallioras, F. Pliakas, I. Gkiougkis, and C. Schuth. "Groundwater vulnerability assessment of a coastal aquifer system at River Nestos eastern Delta, Greece", <i>Environmental Earth Sciences</i> , 2015. | <1 % |
| 21 | <a href="http://etheses.whiterose.ac.uk">etheses.whiterose.ac.uk</a>   | <1 % |
| 22 | <a href="http://www.esciencecentral.org">www.esciencecentral.org</a>   | <1 % |
| 23 | <a href="http://pubs.usgs.gov">pubs.usgs.gov</a>   | <1 % |
| 24 | <a href="http://technical.cloud-journals.com">technical.cloud-journals.com</a>   | <1 % |
| 25 | <a href="http://innspub.net">innspub.net</a>   | <1 % |

---

|    |  |      |
|----|--|------|
| 26 | 203.158.6.22:8080<br>Internet Source   | <1 % |
| 27 | Juan J. Martínez-Bastida. "Intrinsic and specific vulnerability of groundwater in central Spain: the risk of nitrate pollution", Hydrogeology Journal, 11/26/2009<br>Publication | <1 % |
| 28 | <a href="http://www.pjoes.com">www.pjoes.com</a><br>Internet Source  | <1 % |
| 29 | <a href="http://ccsenet.org">ccsenet.org</a><br>Internet Source  | <1 % |
| 30 | <a href="http://docshare.tips">docshare.tips</a><br>Internet Source  | <1 % |
| 31 | <a href="http://file.scirp.org">file.scirp.org</a><br>Internet Source  | <1 % |
| 32 | <a href="http://documents.mx">documents.mx</a><br>Internet Source  | <1 % |
| 33 | <a href="http://www.cr.chiba-u.jp">www.cr.chiba-u.jp</a><br>Internet Source  | <1 % |
| 34 | <a href="http://inweh.unu.edu">inweh.unu.edu</a><br>Internet Source  | <1 % |
| 35 | Jorgelina Ceferina Montoya, Carolina Porfiri, Zinda Edith Roberto, Ernesto Francisco Viglizzo. "Assessing the vulnerability of   | <1 % |

---

# groundwater resources in semiarid lands of central Argentina", Sustainable Water Resources Management, 2018

Publication

---

Exclude quotes      Off

Exclude matches      Off

Exclude bibliography      On

# Salatiga\_groundwater\_basin,\_Central\_Java\_Province,\_Indone

---

## GRADEMARK REPORT

---

FINAL GRADE

/0

GENERAL COMMENTS

**Instructor**

---

PAGE 1

---

PAGE 2

---

PAGE 3

---

PAGE 4

---

PAGE 5

---

PAGE 6

---

PAGE 7

---

PAGE 8

---

PAGE 9

---

PAGE 10

---

PAGE 11

---

PAGE 12

---

PAGE 13

---