

Seismic Hazard Analysis Study of New Semarang International Airport Due to Shallow Crustal Fault Earthquake Scenario

by Windu Partono

Submission date: 11-Dec-2019 04:44PM (UTC+0700)

Submission ID: 1232227061

File name: Seismic_Hazard_Analysis_Study_of_New.pdf (860.12K)

Word count: 4115

Character count: 19326

Seismic Hazard Analysis Study of New Semarang International Airport Due to Shallow Crustal Fault Earthquake Scenario



Windu Partono, Masyhur Irsyam, I. Wayan Sengara, Asrurifak, Frida Kistiani, Undayani Cita Sari and Haryadi

9

W. Partono (✉) · F. Kistiani · U. C. Sari · Haryadi

M. Irsyam · I. W. Sengara

Asrurifak

4

© Springer Nature Switzerland AG 2020

F. Mohamed Nazri (ed.), *Proceedings of AICCE'19*, Lecture Notes in Civil Engineering 53, https://doi.org/10.1007/978-3-030-32816-0_15

249

Keywords PSHA · DSHA · SRA · MCE_R · SRA

1 Introduction

The new Ahmad Yani International Airport, Semarang Indonesia was first operated on June 6 2018. The position of the new airport is close to the old airport and moved to the north side of the old airport area. The main objective of the development of the airport is for increasing the passengers demand capacity per year. The new airport uses the same runway with the previous one. The major improvement is the position of airport terminal is moved from the south-part to the north-part runway and the terminal area is increased from 6708 to 58,652 m². The airport is located in the north-part of the city and located at the coastal area. The airport was first operated one year after the ISHM-2017 released. Based on the ISHM-2017 the airport location is closed to the new seismic source shallow crustal fault, Semarang Fault. The Semarang fault trace is spreading from the western-part to the center-part of the city. Based on the ISHM-2017 there is another fault trace which is located and spread out at the eastern-part of the city. Figure 1 shows the bird view of the airport area and Fig. 2 shows the airport position toward Semarang fault (with minimum 1 km distance) and Lasem fault (with minimum 5 km distance).

Due to the position of the airport against two closest seismic sources, the earthquake scenarios should be taken into consideration for evaluating the capabilities of the infrastructures within the airport area in resisting earthquake waves. A comprehensive investigation should be performed not only to all buildings and



Fig. 1 Bird view Ahmad Yani International Airport

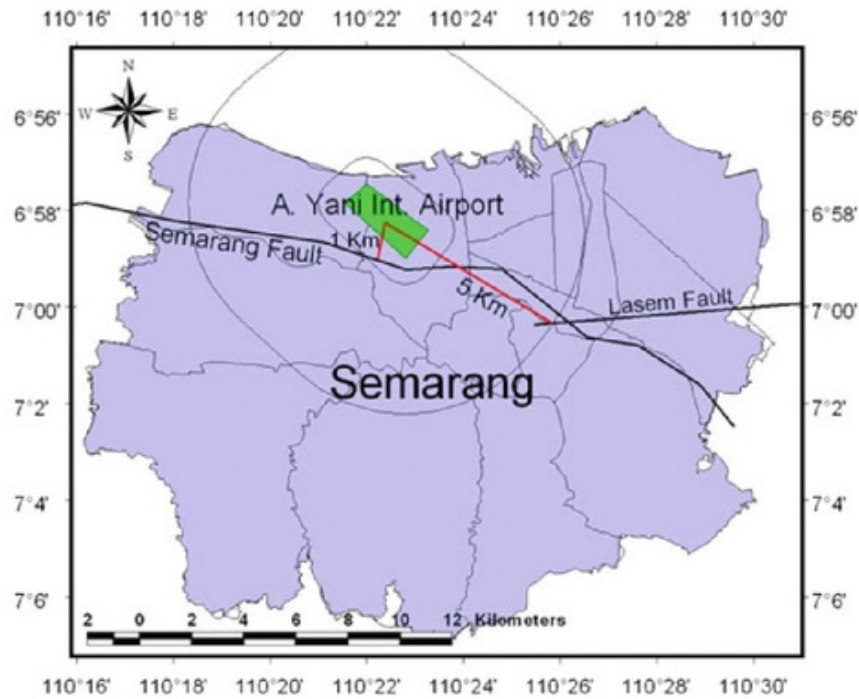


Fig. 2 Position of airport toward two closest seismic sources

facilities within the airport area but also for the seismic mechanisms that might happen to all seismic sources. This paper express one aspect of seismic mitigation related with the possibilities of seismic forces that could be changed to all buildings within the airport. The seismic forces used for building evaluation is developed based on the new ISHM-2017 data and then compared to the previous seismic forces design developed using SNI 1726:2012 [15] and SRA caused by shallow crustal fault earthquake scenario.

Based on the SNI 1726:2012 [15] the seismic forces that can be applied to the buildings is design spectral acceleration (DSA). By using the DSA model of seismic forces, the strength and stability of building structures due to earthquake force scenarios can be predicted.

2 Methodology

The development of DSA can be divided into three basic steps. The first step is the Probabilistic and Deterministic Seismic Hazard Analysis (PSHA and DSHA). Following the same method for developing ISHM-2017, the PSHA is developed by conducting 2% probability of exceedance in 50 years or 2500 years earthquake return periods [3, 9]. The DSHA is performed based on the maximum earthquake magnitude and the closest distance of earthquake source to site position. The ground motion prediction equations (GMPE) or attenuation functions used for spectral acceleration calculation in PSHA and DSHA are divided into four different

seismic models such as Shallow Crustal Fault, Shallow Crustal Background, Interface Subduction Megathrust and Benioff Subduction Intraslab. Table 1 shows the GMPE used for spectral acceleration calculation [9]. The weight factor used for spectral acceleration calculation is a factor for obtaining the average value of three different GMPE.

The spectral acceleration of PSHA for each site is calculated using the Total Probability Theorem [11]. The DSHA spectral acceleration is calculated using the same GMPE and the maximum magnitude used for the calculation is adopted based on the research conducted by National Center for Earthquake Studies [13]. Figure 3 shows 0.2 s and Fig. 4 shows 1 s uniform hazard curves developed using PSHA at $(110.4^\circ, -7^\circ)$ [13]. Table 2 shows PSHA with 2% probability of exceedance in 50 years at 4 (four) different points surrounding the airport position. Table 3 shows DSHA calculated at the same four points.

The next seismic hazard analysis is conducted by combining the PSHA and DSHA for obtaining the Most Considered Earthquake (MCE). The MCE is performed by conducting Risk Targeted Ground Motion (RTGM) analysis of PSHA that can produce 1% probability of building collapse in 50 years and combine the RTGM analysis result with 84th percentile of DSHA. The RTGM analysis is performed following the same method described by Luco et al. [10], Sengara et al. [14] and ASCE/SEI 7-16 [2] by modifying logarithmic standard deviation (β) equal to 0.65 and adjusting direction factor 1.1 and 1.3 for long and short period spectral hazard. The combination analysis of RTGM and DSHA will produce $MCE_R S_S$ (short period) and S_1 (long period) spectral acceleration. Table 4 shows $MCE_R S_S$ and S_1 calculated at 4 points surrounding Ahmad Yani International Airport.

Two spectral acceleration $MCE_R S_S$ and S_1 are then used for developing the final steps such as surface spectral accelerations (S_{MS} and S_{M1}) and DSA (S_{DS} and S_{D1}). Based on SNI 1726:2012 [15] and ASCE/SEI 7-16 [2] the DSA (S_{DS} and S_{D1}) is 2/3 (two-third) of the surface spectral acceleration S_{MS} and S_{M1} . The surface

Table 1 Ground motion prediction equation

No	Seismic source model	GMPE	Weight factor
1	Shallow crustal fault	Boore and Atkinson [5]	0.333
		Campbell and Bozorgnia [6]	0.333
		Chiou and Youngs [7]	0.333
2	Shallow background	Boore and Atkinson [5]	0.333
		Campbell and Bozorgnia [6]	0.333
		Chiou and Youngs [7]	0.333
3	Interface subduction megathrust	Abrahamson et al. [1]	0.333
		Zhao et al. [18]	0.333
		Atkinson and Boore [4]	0.333
4	Benioff subduction intraslab	Youngs et al. [17]	0.333
		Atkinson and Boore [4]	0.333
		Atkinson and Boore [4]	0.333

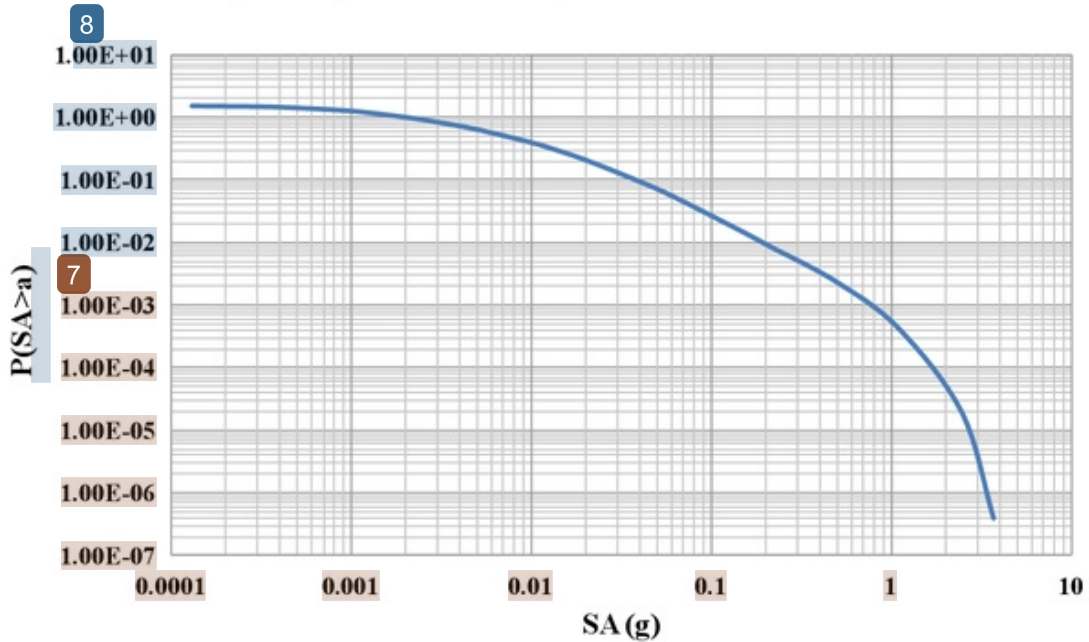


Fig. 3 Uniform hazard curve 0.2 s calculated at (110.4°, -7°) [13]

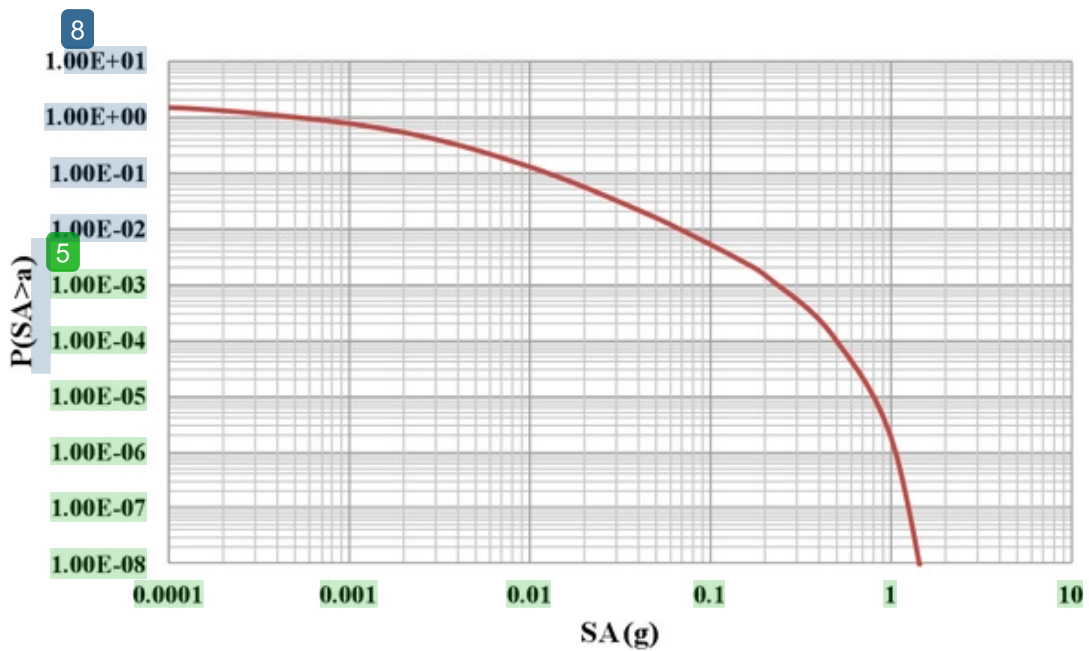


Fig. 4 Uniform hazard curve 1 s calculated at (110.4°, -7°) [13]

spectral acceleration S_{MS} and S_{M1} at the airport area are calculated using two site factors F_a (for S_S) and F_v (for S_1). The value of F_a and F_v are calculated based on the site class soil [2, 15]. This research used two types of site factors such as site factor used by SNI 1726:2012 [15] and site factors announced by Stewart and Seyhan [16] as a modified site factor for SE class used by ASCE/SEI 7-16 [2]. These two models of site factor are used for developing S_{MS} and S_{M1} surface spectral acceleration.

Table 2 PSHA spectral acceleration calculated for 2% probability of occurrence in 50 years [13]

No	Longitude (°)	Latitude (°)	PSHA	
			0.2 s (g)	1 s (g)
1	110.3	-6.9	0.73536	0.34395
2	110.3	-7.0	1.01976	0.43813
3	110.4	-6.9	0.70469	0.33458
4	110.4	-7.0	0.99770	0.43311

Table 3 DSHA 2017 [13]

No	Longitude (°)	Latitude (°)	DSHA	
			0.2 s (g)	1 s (g)
1	110.3	-6.9	0.7503	0.1857
2	110.3	-7.0	1.4334	0.3638
3	110.4	-6.9	0.6405	0.1524
4	110.4	-7.0	1.4494	0.3873

Table 4 MCE_R S_S and S_I at 4 points close to the Airport position

No	Longitude (°)	Latitude (°)	MCE_R	
			S_S (g)	S_I (g)
1	110.3	-6.9	0.73536	0.34395
2	110.3	-7.0	1.01976	0.43813
3	110.4	-6.9	0.70469	0.33458
4	110.4	-7.0	0.99770	0.43311

The DSA developed based on the new SHMI-2017 and ASCE/SEI 7-16 [2] is then compared to the previous DSA at the same location calculated using SNI 1726:2012 [15]. If the new DSA is equal or almost equal or less than the DSA develop from SNI 1726:2012 [15], the buildings and infrastructures located at the airport area are predicted have the capability in resisting earthquake caused by all seismic sourced introduced in SHMI-2017.

The DSA calculated using two different seismic codes, SNI 1726:2012 [15] and modified ASCE/SEI 7-16 [2], are then compared to the surface spectral acceleration calculated using Site Response Analysis (SRA). The SRA was performed using geotechnical investigation data and Microtremor investigation data. The purpose of the Microtremor investigation is for predicting the bedrock elevation [8]. Using this bedrock elevation and soil dynamic data, the SRA is then performed based on Kelvin-Voigt equivalent linear model. The predicted bedrock elevation investigation was performed by Partono et al. [12]. Surface spectral acceleration was developed using acceleration time history produced by San Simeon earthquake (reverse mechanism) data having a magnitude of 6.52 Mw and epicenter distance 5.07 km. The acceleration time histories used in SRA was collected from Pacific Earthquake Engineering Research (PEER) database. The magnitude value is

adjusted based on the SHMI-2017 information for Semarang fault. For seismic hazard analysis the maximum magnitude of Semarang fault model is adjusted to 6.5 Mw.

3 Result and Discussions

Ahmad Yani International Airport is located closed to two seismic sources (2) Semarang and Lasem faults. As mention in Fig. 2 the minimum distance to Semara (2) fault trace is approximately less than 1 km and the minimum distance to Lasem fault trace is less than 5 km. To evaluate the effect of those two seismic sources (23) toward the airport buildings it is important to check the distribution of PGA (Peak Ground Acceleration), short period (0.2 s) and long period (1 s) spectral acceleration calculated (18) using PSHA and DSHA. Figure 5 shows the PGA map, Fig. 6 shows the 0.2 s spectral acceleration map and Fig. 7 shows the distribution of 1 s spectral acceleration (32) map developed using PSHA (PUSGEN, 2017) for the whole (2) area of the city. The development of three seismic hazard maps is conducted using 2% (30) probability of exceedance in 50 years or 2500 years return period earthquake. As it can seen in those three figures (29) maximum spectral acceleration is distributed close to the fault trace. The PGA, 0.2 s and (24) spectral accelerations are in between 0.19–0.21 g, 0.8–1.1 g and 0.37–0.44 g respectively (“g” is a gravitational acceleration = 9.81 m/s^2).

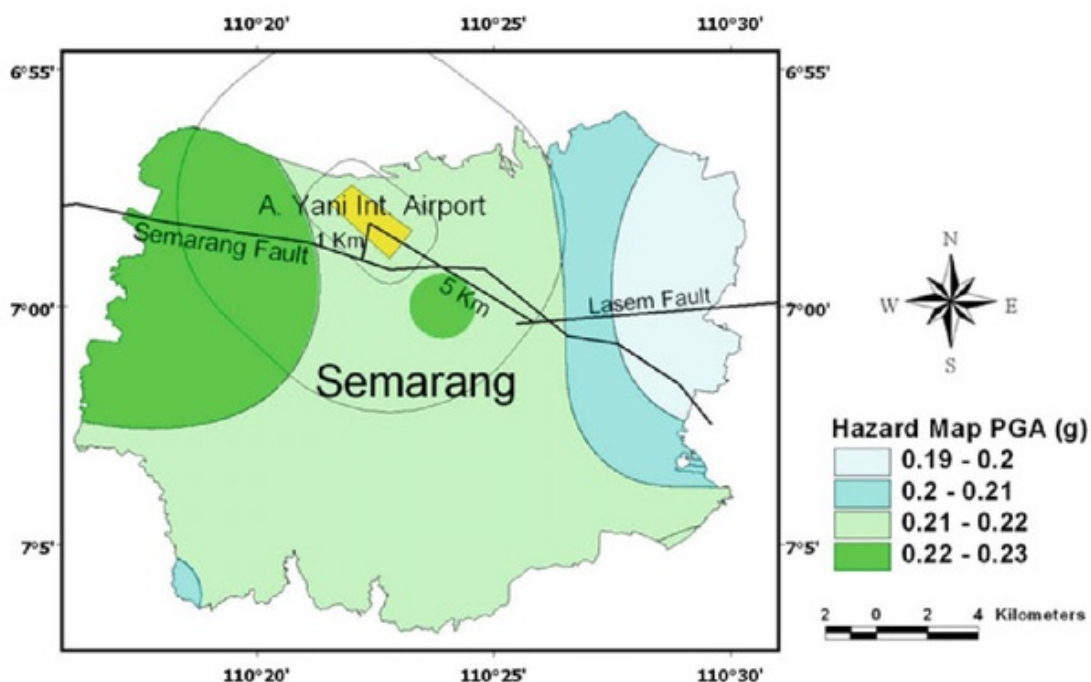


Fig. 5 PGA map with 2% probability of occurrence in 50 years [13]

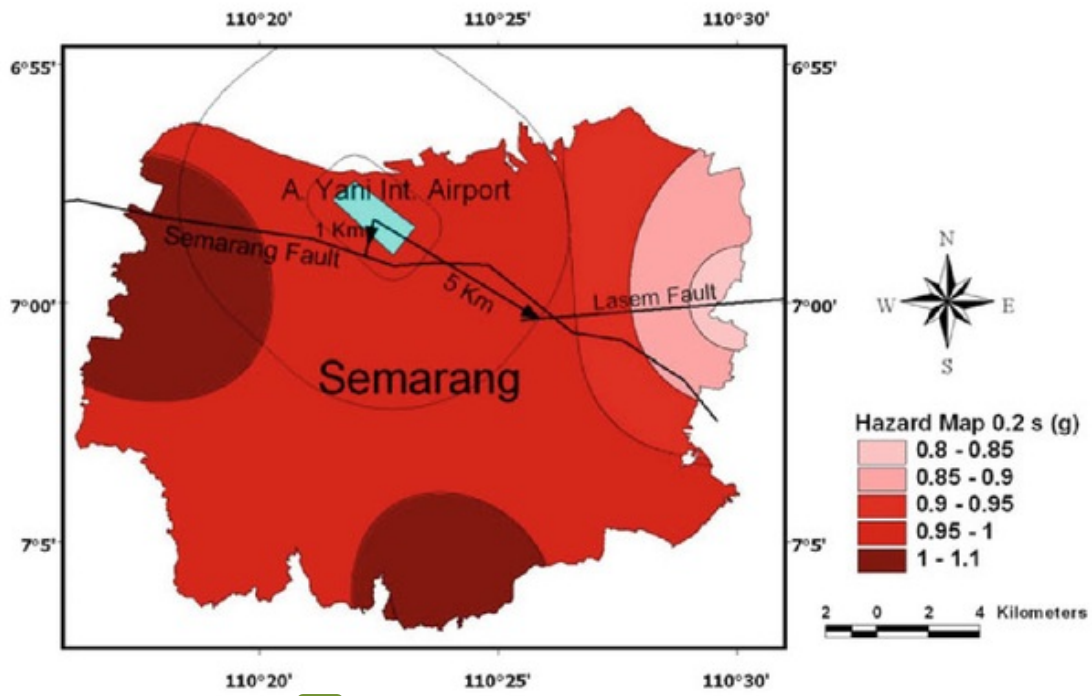


Fig. 6 Hazard map 0.2 s with 2% probability of occurrence in 50 years [13]

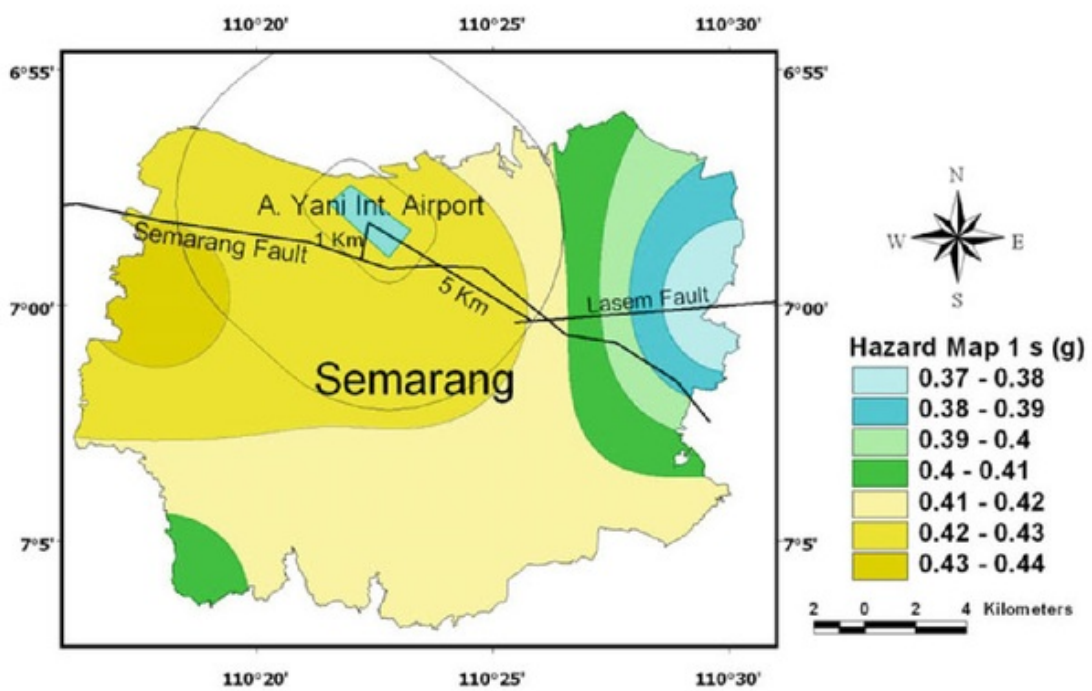


Fig. 7 Hazard map 1 s with 2% probability of occurrence in 50 years [13]

The evaluation of airport area toward seismic acceleration is also conducted using DSHA. Figure 8 shows the distribution of PGA caused by subduction earthquake having a maximum magnitude of 8.5 Mw. Figure 9 shows the distribution of PGA caused by Semarang and Lasem faults having a maximum magnitude of 6.6 Mw [13]. It can be seen in Figs. 8 and 9 the PGA values caused by subduction earthquake with magnitude 8.5 Mw is less than 0.1 g. However the PGA values caused by fault earthquake are greater than subduction earthquake.

The $MCE_R S_S$ and S_1 spectral accelerations calculation were developed using the combination of PSHA (for producing RTGM spectral acceleration with 1% probability of collapses in 50 years) and 84th percentile of DSHA. The RTGM calculation was performed by conducting the same method proposed by Luco et al. [10] and ASCE/SEI 7-16 [2] and applying different logarithmic standard deviation value “ β ” equal to 0.65 and adjusting 1.1 and 1.3 direction factors for short and long period spectral accelerations. Table 4 shows the $MCE_R S_S$ and S_1 data calculated at four different points located closed to airport position. The reason why it should be calculated at four points due to the position of the airport coordinate is not equal toward national seismic hazard maps coordinate data developed by ISHM-2017. The $MCE_R S_S$ and S_1 were calculated at (110.35°, -6.95°) airport coordinate by conducting weight factor of four points. The weight factor is developed based on the site distance toward four points. The $MCE_R S_S$ and S_1 result obtained at this point is 0.7965 and 0.3512 g respectively. Due to the coordinate of airport position, the $MCE_R S_S$ and S_1 should be verified based on the closest four pairs S_S and S_1 values as mention in Table 4.

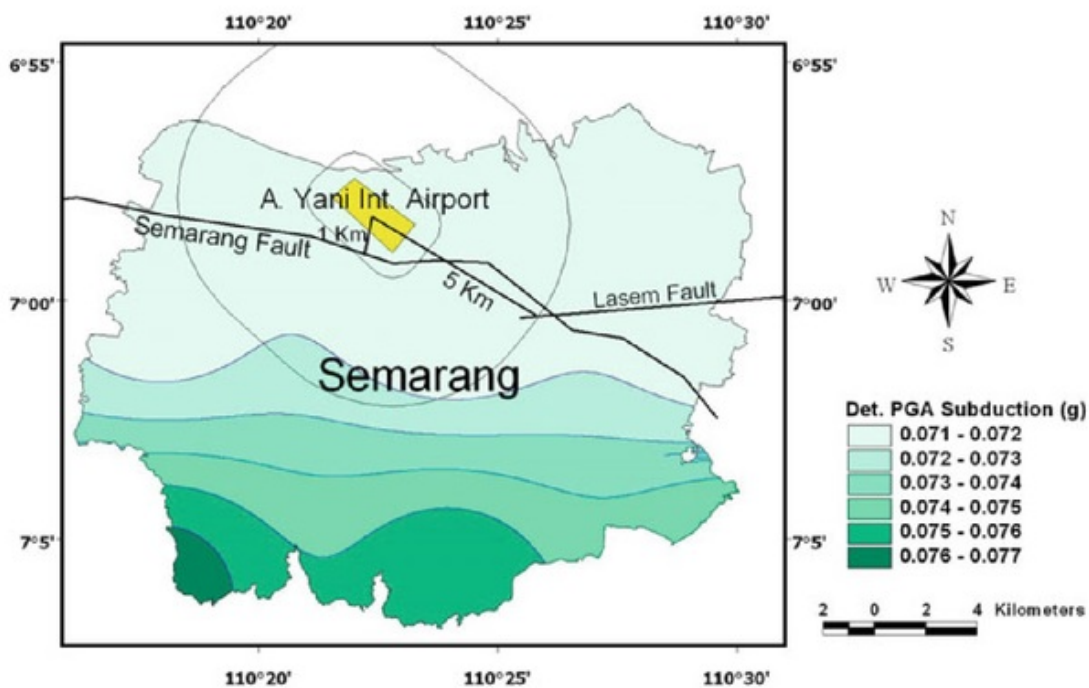


Fig. 8 Deterministic PGA map caused by subduction earthquake

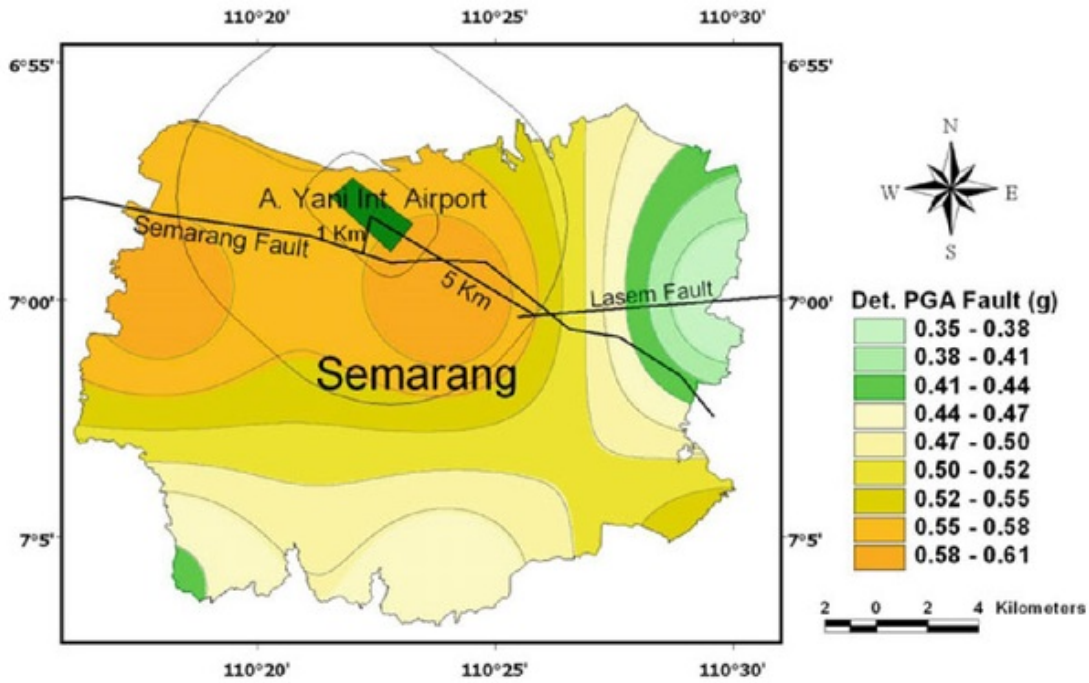


Fig. 9 Deterministic PGA map caused by shallow crustal fault earthquake

The DSA at the airport is developed by first conducting the evaluation of boring investigation result. Nine boring investigations were conducted on site with maximum 52 m depth. Standard Penetration Test (N-SPT) investigation was conducted at each boring position with 2 m interval. Figure 10 shows the N-SPT profile result conducted at 9 boring positions. Based on the result of nine boring investigations the average of N-SPT value at top 30 m soil deposit (N-30) is 2.67 or less than 15. Based on SNI 1726:2012 [15] the airport buildings and infrastructures are located in SE (soft soil) class. As it can be seen in Fig. 10 the N-SPT values at 0–10 m depth is in between 0 and 2. The minimum to maximum values of N-SPT in between 10 and 20 m depth is 2 to 18 and for 20–30 m depth is in between 8 and 30.

Two site factors F_a and F_v are required for developing DSA at the airport position. Two different methods are conducted at this location for obtaining F_a and F_v . First by using the same values used by SNI 1726:2012 [15] and the second is by using the values proposed by Stewart and Seyhan [16] (modified ASCE/SEI 7-16 [2]). Table 5 shows list of F_a and F_v site factors used in SNI 1726:2012 [15] and Table 6 shows list of F_a and F_v site factors developed by Stewart and Seyhan [16] (modified ASCE/SEI 7-16 [2]) for site class SE (soft soil). Table 7 shows two difference results of site factor F_a and F_v calculated using the same MCER S_S and S_1 values. Following the same method described by SNI 1726:2012 [15] and ASCE/SEI 7-16 [2] the surface spectral acceleration S_{MS} and S_{M1} can be calculated by multiplying the site factor F_a toward S_S and F_v toward S_1 . Table 8 shows the S_{MS} and S_{M1} calculated using two difference site factors, such as SNI 1726:2012 [15] and Stewart and Seyhan [16]. The S_{MS} value calculated using Stewart and

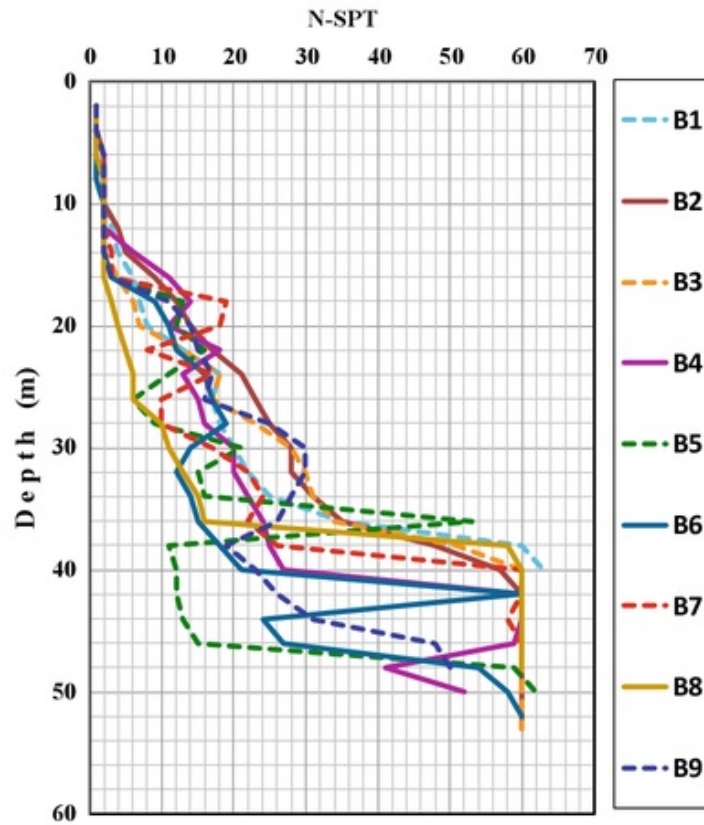


Fig. 10 N-SPT profiles developed from 9 position boring investigations

Table 5 Fa and Fv used by SNI 1726:2012 [15] for site class SE

Site factor	Site class SE				
Fa	SS ≤ 0.25	SS = 0.5	SS = 0.75	SS = 1	SS ≥ 1.25
Fv	S1 ≤ 0.1	S1 = 0.2	S1 = 0.3	S1 = 0.4	S1 ≥ 0.5
	2.5	1.7	1.2	0.9	0.9
	3.5	3.2	2.8	2.4	2.4

Table 6 Fa and Fv developed by Stewart and Seyhan [16] for site class SE

Site factor	Site class SE					
Fa	SS ≤ 0.25	SS = 0.5	SS = 0.75	SS = 1	SS = 1.25	SS ≥ 1.5
Fv	S1 ≤ 0.1	S1 = 0.2	S1 = 0.3	S1 = 0.4	S1 = 0.5	S1 ≥ 0.6
	4.2	3.3	2.8	2.4	2.2	2.0

Table 7 F_a and F_v calculated using two different methods

Method	$S_S = 0.7965 \text{ g}$	$S_1 = 0.3512 \text{ g}$
	F_a	F_v
SNI 1726:2012 [15]	1.144	2.596
Stewart and Seyhan [16]	1.295	2.595

Table 8 The S_{MS} and S_{MI} calculated using two different site factors

Method	$S_{MS} \text{ (g)}$	$S_{MI} \text{ (g)}$
SNI 1726:2012 [15]	0.9105	0.912
Stewart and Seyhan [16]	1.0305	0.912

Seyhan [16] (Table 6) is greater than the S_{MS} calculated at the same location using SNI 1726:2012 [15] (Table 5).

Based on SNI 1726:2012 [15] and modified ASCE/SEI 7-16 [2] all buildings should be design using DSA as a model of seismic force. The existing buildings which are already designed using previous DSA [15] shall be evaluated and compared to the new DSA (modified ASCE/SEI 7-16 [2] code). The evaluation should be performed for existing building due to the update data of earthquake records. As already mention before that the existing buildings and infrastructures within the airport area were designed based on SNI 1726:2012 [15]. The new ISHM-2017 has already released in 2017. The DSA developed based on SNI 1726:2012 [15] should be compared to the DSA calculated based on ISHM-2017. Table 9 shows the S_{DS} and S_{DI} values calculated at the airport position (110.35° , -6.95°) based on SNI 1726:2012 [15] and modified ASCE/SEI 7-16 [2]. As it can be seen in Table 8, the S_{MS} and S_{MI} values for SNI 1726:2012 [15] are different compared to Table 9. The S_{MS} and S_{MI} in Table 8 are calculated using S_S (0.7965 g) and S_1 (0.3512 g) as already mentioned in Table 7. However the S_{MS} and S_{MI} [15] in Table 9 were developed for existing airport design. Figure 11 shows two difference curves of DSA for site class SE calculated using SNI 1726:2012 [15] (SE-2012) and modified ASCE/SEI 7-16 [2] (SE-2019). As it can be seen in this figure there is no significant improvement of DSA at the airport site.

The DSA developed using two different codes, SNI 1726:2012 [15] and modified ASCE/SEI 7-16 [2] are then evaluated toward SRA. The purposed of SRA is to evaluate the possibility of earthquake force caused by specific earthquake scenario. The SRA was performed by conducting earthquake scenario having a magnitude of 6.52 Mw and epicenter distance 5.07 km which represents Semarang fault earthquake scenario. The acceleration time histories (North-South/NS and

Table 9 The S_{DS} and S_{DI} calculated using two different seismic codes

Method	$S_{MS} \text{ (g)}$	$S_{MI} \text{ (g)}$	$S_{DS} \text{ (g)}$	$S_{DI} \text{ (g)}$
SNI 1726:2012 [15]	0.909	0.808	0.606	0.539
Modified ASCE/SEI 7-16 [2]	1.0305	0.912	0.687	0.608

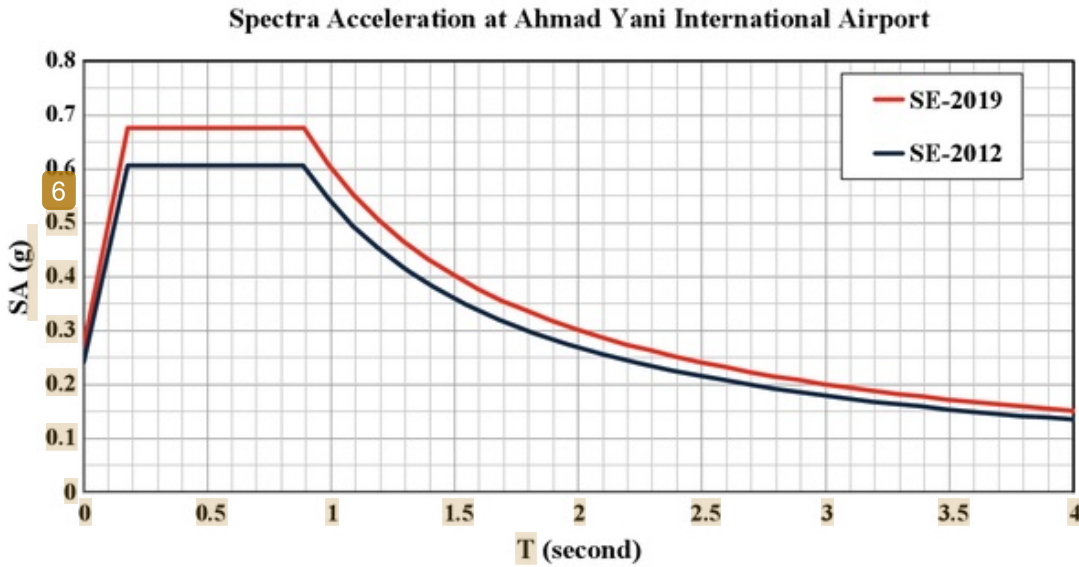


Fig. 11 The difference of DSA for Ahmad Yani Airport based on SNI 1726:2012 [15] (SE-2012) and modified ASCE/SEI 7-16 [2] (SE-2019)

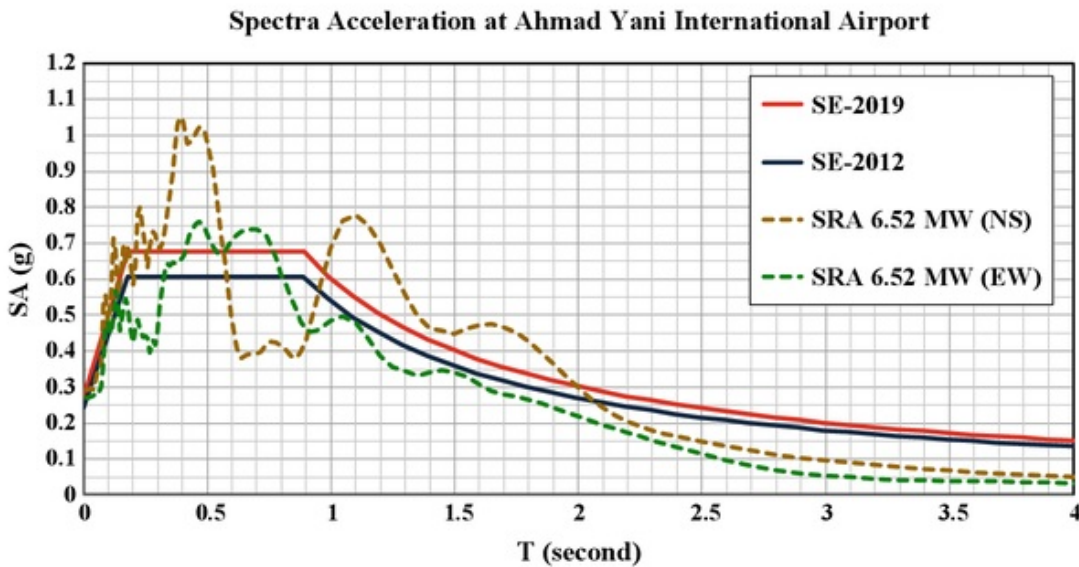


Fig. 12 Comparative SRA spectral acceleration toward two DSA for Ahmad Yani Airport

East-West/EW) used for SRA are collected from San Simeon earthquake. The San Simeon earthquake was conducted for SRA calculation due to the difficulties for collecting ground motion data of reverse mechanism source earthquakes. As it can be seen in Fig. 12 the surface spectral acceleration developed by using two directions acceleration time histories (NS and EW) earthquake scenario are almost equal compared to the DSA developed based on SNI 1726:2012 [15] (SE-2012) and modified ASCE/SEI 7-16 [2] (SE-2019). Based on the DSA and SRA analysis as can be seen in Fig. 12 the buildings and infrastructures within the airport area

which already designed using SNI 1726:2012 [15] are predicted have the capabilities in resisting earthquake scenarios due to Semarang and Lasem earthquake having a magnitude 6.5 Mw and minimum 5 km epicenter distance to the airport position.

4 Conclusions

Research on the evaluation of the new Ahmad Yani International Airport in Semarang, Indonesia against predicted earthquake force has already performed. The proposed of this research is to evaluate the capability of structures in resisting predicted earthquakes with probability of exceedance 2% in 50 years. The evaluation was performed due to the position of the airport area is less than 1 km to the new developed Semarang Fault trace and less than 5 km to Lasem Fault trace. The evaluation is restricted only on the design earthquake force criterion in terms of DSA calculation results.

DSA is a model of earthquake force usually used for seismic resistance design for buildings and non buildings. The new DSA is developed based on modified ASCE/SEI 7-16 [2] by modifying the method of MCE_R and S_1 calculation. The MCE_R analysis is performed by combining RTGM with 1% probability of collapses in 50 years and 84th percentile of SHA. The RTGM analysis is performed using PSHA result analysis by applying logarithmic standard deviation value " β " equal to 0.65 and direction factor 1.1 and 1.3 for short and long period spectral accelerations respectively.

The second modification for DSA is conducted by using two site factors F_a and F_v for developing surface spectral acceleration (S_{MS} and S_{M1}). The two F_a and F_v site factor values are applied in this research by conducting the same values proposed by Stewart and Seyhan [16].

The development of DSA is also conducted using 9 boring investigations. The purpose of this investigation is to obtain the information of site soil class of the airport area. The standard penetration test is also performed with interval 2 m depths for obtaining N-SPT and average N-SPT values at the top 30 meters soil layers at each boring position. Based on the average N-SPT (at top 30 m soil layer) values calculated at 9 boring positions the airport area is located at soft soil (SE) class.

Based on the site data obtained at the airport area, the DSA is then calculated and compared with the DSA of SNI 1726:2012 [15]. The new DSA (calculated using modified ASCE/SEI 7-16 [2]) is bigger compared to the previous DSA [15]. However there is no significant improvement of the new DSA compared to DSA [15].

The DSA developed based on the modified ASCE/SEI 7-16 [2] and SNI 1726:2012 [15] are then compared to the surface spectral acceleration calculated using site response analysis (SRA). The SRA was performed by conducting a scenario earthquake having a magnitude of 6.52 Mw and 5.07 km epicenter

distance which represents shallow crustal fault scenario (Semarang and Lasem fault earthquake). The spectral acceleration developed by three different methods (ASCE 1726:2012, modified ASCE/SEI 7-16 [2] and SRA) are almost equal and have no significant improvements. Based on the information related with the DSA and SRA analysis, the buildings or infrastructures built in the airport area is predicted save enough for resisting the predicted earthquake caused by Semarang and Lasem fault having a magnitude of 6.5 Mw and epicenter distance minimum 5 km.

Acknowledgements This research was financially supported by The Faculty of Engineering, Diponegoro University, Indonesia through Strategic Research Grant 2019. The Author also would like to thank to the Ministry of Public Works and Human Settlements Indonesia and National Center for Earthquake Studies (PUSGEN) for providing data and technical supports during the development of this research. The Author would like to express the deepest appreciation to Jaya Contractor for providing geotechnical data and geotechnical investigation.

References

Seismic Hazard Analysis Study of New Semarang International Airport Due to Shallow Crustal Fault Earthquake Scenario

ORIGINALITY REPORT

16%

SIMILARITY INDEX

10%

INTERNET SOURCES

10%

PUBLICATIONS

10%

STUDENT PAPERS

PRIMARY SOURCES

1	www.geomatejournal.com Internet Source	3%
2	www.matec-conferences.org Internet Source	1%
3	T. G. Sitharam, P. Anbazhagan, K. Ganesh Raj. "Use of remote sensing and seismotectonic parameters for seismic hazard analysis of Bangalore", Natural Hazards and Earth System Sciences, 2006 Publication	1%
4	Nor Azam Ramli, Syabiha Shith, Norrimi Rosaida Awang. "Chapter 102 Linking Science and Administration: Local Ozone Management and Prevention Framework in Malaysia", Springer Science and Business Media LLC, 2020 Publication	1%
5	openaccess.iyte.edu.tr Internet Source	1%
6	transportation.njit.edu Internet Source	1%
7	www.whyles.org Internet Source	1%
8	uos-app00353-si.soton.ac.uk Internet Source	1%

W Partono, F Kistiani, U C Sari, Haryadi, E

9	Putro, W R Ramadhan. "Development of surface ground motion and spectral acceleration based on modified shear wave propagation analysis", IOP Conference Series: Materials Science and Engineering, 2019 Publication	1%
10	Submitted to Higher Education Commission Pakistan Student Paper	1%
11	oa.upm.es Internet Source	<1%
12	www.e3s-conferences.org Internet Source	<1%
13	codes.iccsafe.org Internet Source	<1%
14	Windu Partono, Undayani Cita Sari. "Stability evaluation of Sermo dam, Yogyakarta, using two components acceleration time histories causes by Java subduction earthquake scenarios", MATEC Web of Conferences, 2018 Publication	<1%
15	H. Aghabarati. "Near-source ground motion attenuation relationship for PGA and PSA of the vertical and horizontal components", Bulletin of Earthquake Engineering, 04/24/2009 Publication	<1%
16	Windu Partono, Masyhur Irsyam, Sri Prabandiyani Retno Wardani. "Development of acceleration time histories for Semarang, Indonesia, due to shallow crustal fault earthquakes", AIP Publishing, 2017 Publication	<1%
17	Submitted to Lebanese University Student Paper	<1%

18	Submitted to Deakin University Student Paper	<1%
19	istanbulbridgeconference.org Internet Source	<1%
20	Windu Partono, Masyhur Irsyam, Indrastono Dwi Atmanto, Andi Retno Ari Setiaji, Sigit Purnomo, Robby Yanuar Setiawan. "Building evaluation using two components of acceleration time histories causes by shallow crustal fault earthquakes with maximum magnitude 7 Mw", MATEC Web of Conferences, 2018 Publication	<1%
21	Submitted to The University of Manchester Student Paper	<1%
22	Windu Partono, Yulita Ami Priastiwi, Nuroji, Indrastono Dwi Atmanto et al. "Structural analysis using three-component acceleration time histories caused by shallow crustal fault earthquakes with a maximum magnitude of 7 Mw", MATEC Web of Conferences, 2019 Publication	<1%
23	www.marshall.edu Internet Source	<1%
24	Submitted to Auburn University - Engineering Student Paper	<1%
25	Submitted to School of Business and Management ITB Student Paper	<1%
26	Submitted to Indian Institute of Science, Bangalore Student Paper	<1%
27	puskim.pu.go.id Internet Source	<1%

<1%

28

Submitted to University of Strathclyde

Student Paper

<1%

29

www.scribd.com

Internet Source

<1%

30

Submitted to Middle East Technical University

Student Paper

<1%

31

"Minimum Design Loads and Associated Criteria for Buildings and Other Structures", American Society of Civil Engineers (ASCE), 2017

Publication

<1%

32

Submitted to University of Durham

Student Paper

<1%

33

Submitted to IIT Delhi

Student Paper

<1%

Exclude quotes Off

Exclude matches Off

Exclude bibliography Off