

On the Effect of Addition of 1,2-Propylene Glycol Composition on Power and Torque of an EFI Passenger Car Fueled with Methanol-Gasoline M15

by Nazaruddin Sinaga

Submission date: 14-Dec-2019 10:28AM (UTC+0700)

Submission ID: 1234310435

File name: I_Passenger_Car_Fueled_with_Methanol-Gasoline_M15_-_turnitin.pdf (341.8K)

Word count: 1288

Character count: 6864

PAPER · OPEN ACCESS

On the Effect of Addition of 1,2-Propylene Glycol Composition on Power and Torque of an EFI Passenger Car Fueled with Methanol-Gasoline M15

To cite this article: Nazaruddin Sinaga *et al* 2019 *IOP Conf. Ser.: Mater. Sci. Eng.* **494** 012014

View the [article online](#) for updates and enhancements.

On the Effect of Addition of 1,2-Propylene Glycol Composition on Power and Torque of an EFI Passenger Car Fueled with Methanol-Gasoline M15

Nazaruddin Sinaga^{1*}, Bambang Yunianto¹, Syaiful¹

1. Introduction

Sustainable development, renewable energy and global warming are two major issues that are worldwide concerned over past decades. High increased in energy demand has resulted both in higher fossil fuel consumption and emissions. Presently, it is estimated that greenhouse gases release from fossil fuel combustion at a rate of around 7 billion tons each year [1]. Hence, the utilization and development of clean and renewable energy resources is very attractive. Methanol, ethanol and their blends with gasoline are well known as an important alternative fuels for vehicle engines.



Content from this work may be used under the terms of the [Creative Commons Attribution 3.0 licence](https://creativecommons.org/licenses/by/3.0/). Any further distribution of this work must maintain attribution to the author(s) and the title of the work, journal citation and DOI.

Published under licence by IOP Publishing Ltd

Presently, an important multi-purpose chemical that has an extensive use as anti-freeze agent, 1,2-propylene glycol, is attracting interest in recent years as an additive for methanol-gasoline fuel. Therefore, it is important to investigate the effect of composition of the 1,2-propylene glycol additive on engine power and torque of an engine fueled with methanol-gasoline blends.

2. Literature Review

Compared with gasoline, methanol has several properties that is higher octane number, lower boiling point, higher oxygen content (50% wt), can be mixed, injected and atomized, and simpler chemical structure [2]. Moreover, methanol have a smaller negative impact on the environment than gasoline and benzene [3]. Brinkman et al, investigated the octane content of the fuel blend of methanol-gasoline and found that the octane content increases with increasing amount of methanol in the fuel blend [4]. Zhao H, et al studied on a car using methanol- gasoline fuel blend, and showed that the emissions of carbon monoxide and total hydrocarbons decreased by 9% -21% and 1% -55% , respectively, while emissions of nitrogen oxides increased by 175% -233% [5].

Abu-Zaid et.al [6] made an experimental investigation into the effect of methanol addition to gasoline on the performance of spark ignition engines. They found that the best engine performance, maximum power output, and minimum brake specific fuel consumption, occurs when a 15% volume methanol and 85% volume gasoline blend is used. Eyidogan et. al [7] investigated the impact of alcohol- gasoline fuel blends on the performance and combustion characteristics of an SI engine, and indicated that when alcohol-gasoline fuel blends were used, the brake specific fuel consumption increased; cylinder gas pressure started to rise later than gasoline fuel.

However, there is a serious problem encountered in using gasoline-alcohol blends as motor fuel at low temperatures which is related to the separation of the mixture into two liquid phases, which is strongly influenced by its water content [8, 9]. Siwale et.al [10] investigated the effects of addition of n-butanol on performance, combustion and emission characteristics of methanol-gasoline blend fired in a naturally-aspirated spark ignition engine. They obtained that the brake thermal efficiency improved whereas the exhaust gas temperature of the blends reduced, which is a benefit that reduces compression work.

3. Methods and Materials

Figure 1 illustrates the layout of the engine and data measuring and acquisition equipment. Research was conducted in the laboratory using a small city car Mitsubishi Mirage 1.2 L, sixteen valves multi-point fuel electronic injection system. The fuels used for the experiments are pure gasoline and a blend of 15% gasoline and 85% methanol (M15), by varying the composition of additive in the concentration of 3 ml/l, 4 ml/l, 5 ml/l, 6 ml/l, 7 ml/l, 8 ml/l, 9 ml/l, and 10 ml/l. All the experiments were carried out on the roll dynamometer chassis. The engine specification is shown in Table 1. The engine is linked to the engine scanner to display and record engine operating condition such as mass air flow, ignition timing, injection timing, air fuel ratio and engine RPM, where all. The device is also used to obtain engine power and torque. Gasoline, namely Bensin Premium, is obtained from a gas stations. Methanol with a purity of 75% and received a certificate from the Central Technology of Prevention Industry Pollution Semarang, Indonesia. The fuel blended is prepared before beginning the experiment to ensure that fuel blend is homogeneous. The fuel properties of methanol and additive are shown in Table 2 and Table 3, respectively.



Figure-1. Experimental setup

Table 1 Engine Specification


Table 1 Engine Specification of Mitsubishi Mirage	
Engine type	1.2-liter 12-valve 3-cylinder DOHC MIVEC (3A92)
Fuel Supply	BCI-MULTI
Cylinder Capacity	1,193 cc
Compression Ratio	10.5 : 1
Maximum Power	57 kW (6000 rpm)
Maximum Torque	100 Nm (4000 rpm)
Emission Standard	Euro-6

2 Table 2 Physical properties of Methanol


Physical Properties	Methanol
Chemical formula	CH ₃ OH
Relative molecular mass	32
Density (kg/L)	0.794
Boiling Point (celcius)	65
Latent heat of vaporization (kJ/kg)	1100
Stichiometric air-fuel ratio	6.5
Auto-ignition temperature (celcius)	500
Lower heating value (kJ/kg)	20.260
Mixture heating value with $\lambda = 1$ (kJ/m ³)	3557
RON	110
Laminar Flame Speed (m/s)	0.523

4. Result and Discussion

As shown in Figure 2 and 3, the maximum power of pure gasoline-fuelled vehicles of 51.7 kW at 5900 rpm and maximum torque of vehicles of 84.5 Nm at 3000 rpm. The the power of the engine when using fuel M15 tend to decrease in compare with pure gasoline gasoline, but the value of the torque increased although only a bit. The highest torque value is on the addition of the additive 8ML/L of 86.6 Nm, with an increase of 2% than gasoline at 2500 rpm, and the highest power is on the addition of a 8m/1 additives too, where the value is 51.7 kW at 5800 rpm.

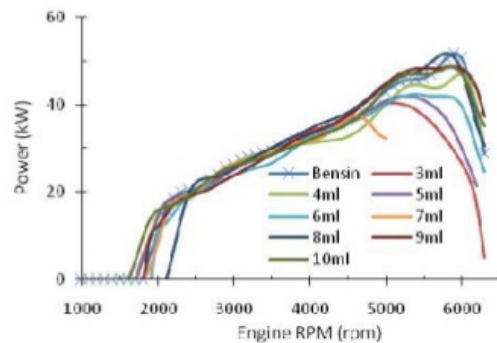

12 **Figure-2.** Effect of additive concentration on engine power

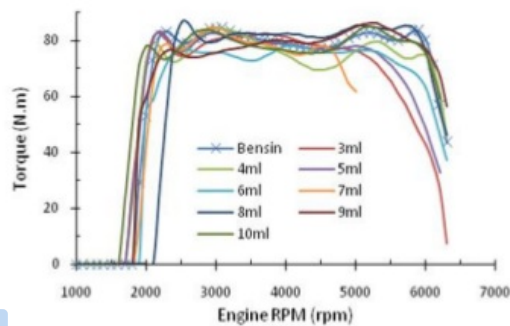

12 **Figure-3.** Effect of additive concentration on engine torque

5. Conclusions

4 It has been studied that the concentration of 1,2- Propylene Glycol additive in the gasoline-methanol blends will affect both the engine power and torque, and has the optimum or best value. In the range of the experiment, it can be concluded that the best additive concentration is 8 ml/l, that give highest engine power and torque. In addition, generally speaking, it can be said that the blend of M15 and 8 ml/l 1,2- Propylene Glycol, will not lowered engine performance of original vehicle fuel (gasoline).

Acknowledgement

This research was carried out partially on financial assistance from PT Indoneka Citra Optima and the Efficiency and Energy Conservation Laboratory, Diponegoro University, Semarang.

On the Effect of Addition of 1,2-Propylene Glycol Composition on Power and Torque of an EFI Passenger Car Fueled with Methanol-Gasoline M15

ORIGINALITY REPORT

38%

SIMILARITY INDEX

22%

INTERNET SOURCES

29%

PUBLICATIONS

0%

STUDENT PAPERS

PRIMARY SOURCES

- 1 aip.scitation.org 12%
Internet Source
- 2 Hui Liu, Zhi Wang, Jianxin Wang. "Methanol-gasoline DFSI (dual-fuel spark ignition) combustion with dual-injection for engine knock suppression", Energy, 2014 4%
Publication
- 3 linknovate.com 3%
Internet Source
- 4 Xiao, Jiefeng, Zhibao Huo, Dezhang Ren, Song Zhang, Jiang Luo, Guodong Yao, and Fangming Jin. "A novel approach for 1,2-propylene glycol production from biomass-derived lactic acid", Process Biochemistry, 2015. 2%
Publication
- 5 Isaac Schifter, Uriel Gonzalez, Luis Díaz, Isidro Mejía-Centeno, Carmen Gonzalez-Macias. "Performance and emissions of gasoline–dual

alcohol blends in spark-ignited single cylinder engine", International Journal of Engine Research, 2017

Publication

6

Poompipatpong, C.. "A modified diesel engine for natural gas operation: Performance and emission tests", Energy, 201112

Publication

2%

7

Lennox Siwale, Lukács Kristóf, Akos Bereczky, Makame Mbarawa, Andrei Kolesnikov.

"Performance, combustion and emission characteristics of n-butanol additive in methanol–gasoline blend fired in a naturally-aspirated spark ignition engine", Fuel Processing Technology, 2014

Publication

2%

8

cdn.intechopen.com

Internet Source

2%

9

ijari.org

Internet Source

2%

10

Nasrollahi, F.. "Liquid-liquid equilibrium calculations for methanol-gasoline blends using continuous thermodynamics", Fluid Phase Equilibria, 20091015

Publication

1%

11

www.israc.gov.il

Internet Source

1%

12

Mehbad, Noura El. "Efficiency of Amphoteric Surfactants as Flow Improvers and Pour Point Depressants", Journal of Power and Energy Engineering, 2013.

Publication

1%

13

ses.nau.edu

Internet Source

1%

14

Park, I.J.. "Corrosion characteristics of aluminum alloy in bio-ethanol blended gasoline fuel: Part 2. The effects of dissolved oxygen in the fuel", Fuel, 201102

Publication

1%

15

Hui Liu, Zhi Wang, Yan Long, Shouzhi Xiang, Jianxin Wang, Scott W. Wagon. "Methanol-gasoline Dual-fuel Spark Ignition (DFSI) combustion with dual-injection for engine particle number (PN) reduction and fuel economy improvement", Energy, 2015

Publication

1%

Exclude quotes Off

Exclude matches < 1%

Exclude bibliography Off

On the Effect of Addition of 1,2-Propylene Glycol Composition on Power and Torque of an EFI Passenger Car Fueled with Methanol-Gasoline M15

GRADEMARK REPORT

FINAL GRADE

/0

GENERAL COMMENTS

Instructor

PAGE 1

PAGE 2

PAGE 3

PAGE 4

PAGE 5

PAGE 6
