

# ENERGY EFFICIENCY ON BOILER SYSTEMS

Nazaruddin Sinaga

Efficiency and Energy Conservation Laboratory  
Diponegoro University

International Workshop on Energy Audits  
Diponegoro University,  
Semarang, August 2 – 3, 2010

# Chapter 1

## Boilers and Steam Utilities

1.1 Boiler and Boiler System

1.2 Types of Boiler

1.3 Thermodynamic Process

1.4 Boiling Heat Transfer

1.5 Boiler Efficiency

1.6 Energy Conservation Opportunities in  
Boiler System

# **Chapter 2**

## **Pumps and Pumping System**

**2.1 Introduction**

**2.2 Type of pumps**

**2.3 Assessment of pumps**

**2.4 Energy efficiency opportunities**

# Objective of Energy Management

- ❑ To achieve and maintain optimum energy procurement and utilization, throughout the organization
- ❑ To minimize energy costs/waste without affecting production & quality
- ❑ To minimize environmental effects.

# Energy Audits

## Definition

“the verification, monitoring and analysis of use of energy including submission of technical report containing recommendations for improving energy efficiency with cost benefit analysis and an action plan to reduce energy consumption “

*Source : A.THUMANN, Handbook on Energy Audits 5th Edition 1998. The Fairmont Press*

# **PLEASE REMEMBER !!!**

**An energy audit is not done once and for all.**

**It is an ongoing process of comparison between theory and practice , leading to an ever practice, leading to an ever-improving understanding of what energy is being used, why it is being used, how it is being used and at what cost.”**

# What is a boiler ?

A boiler is an enclosed vessel that provides a means for combustion heat to be transferred to water until it becomes heated water or steam.

- The hot water or steam under pressure is then usable for transferring the heat to a process.
- When water at atmospheric pressure is boiled into steam its volume increases about 1,600 times, producing a force that is almost as explosive as gunpowder.
- This causes the boiler to be an equipment that must be treated with utmost care.

# Boiler System

## Feed Water System

Provides water to the boiler and regulates it automatically to meet the steam demand.

## Steam System

Collects and controls the steam produced in the boiler and distributed the steam through a piping system to the point of use.

## Fuel System

Provide fuel to generate the necessary heat, normally by combustion process.

# Boiler Systems

BOILER ROOM SCHEMATIC

✓ Water treatment system

✓ Feed water system


✓ Steam System

✓ Blow down system

✓ Fuel supply system

✓ Air Supply system

✓ Flue gas system

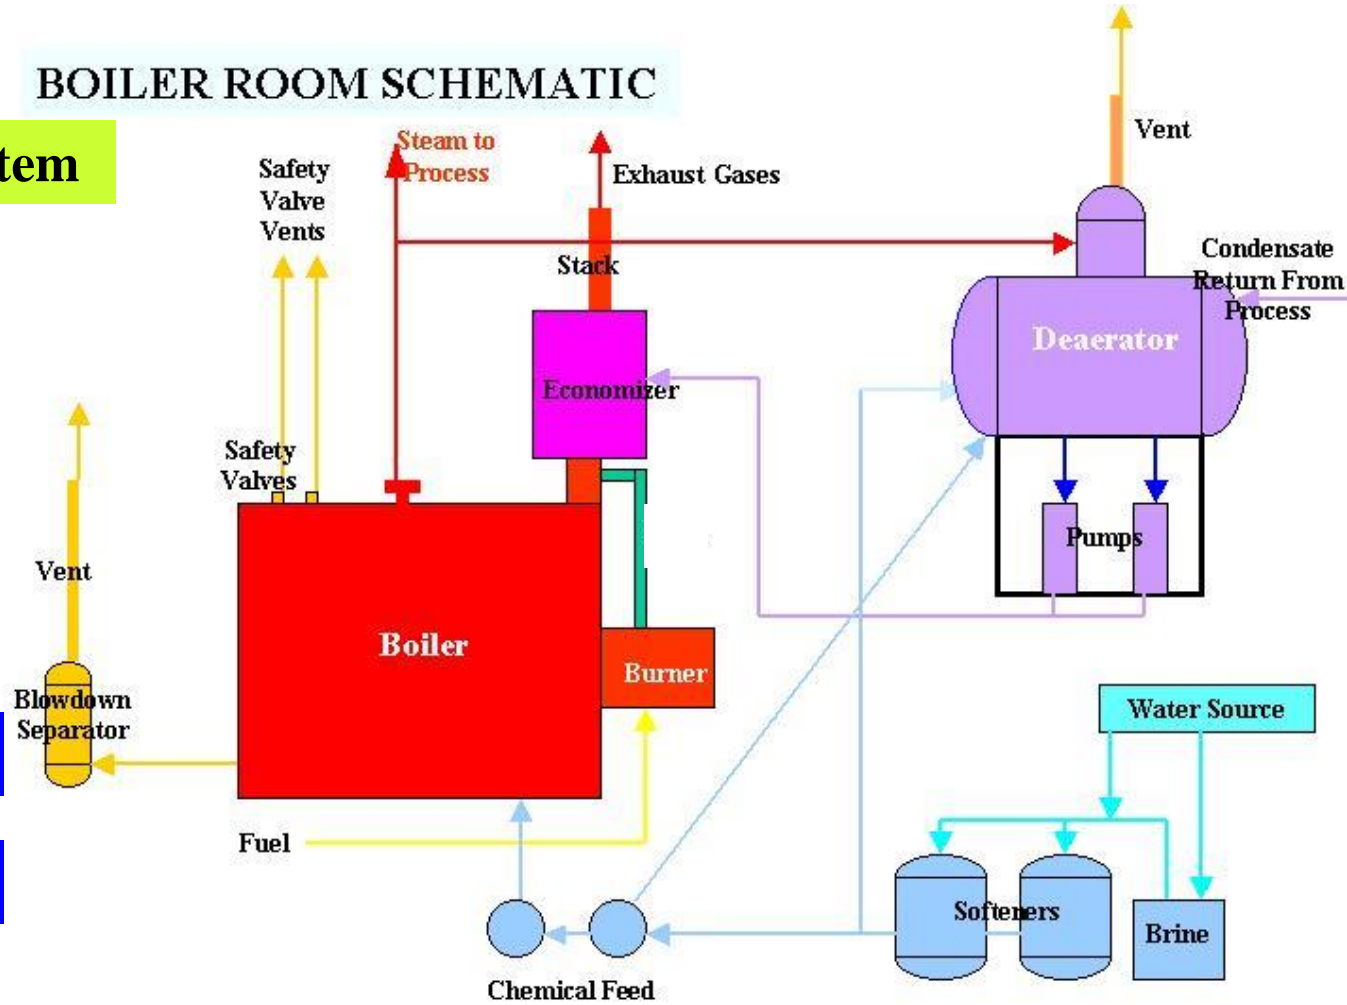

# Feed Water System

The water supplied to the boiler that is converted into steam is called **feed water**.

The 2 sources of feed water are:

- (1) **Condensate or condensed steam** returned from the processes
- (2) **Makeup water (treated raw water)** which must come from outside the boiler room and plant processes.

# Types of Boilers


Two basic types of boiler: **Water Tube Boilers** and **Fire Tube Boilers**

- **Packaged Boiler**
- **FBC Boiler**
- **Spreader Stoker Boiler**
- **Chain- or Traveling Grate Boiler**
- **Atmospheric Fluidized Bed Combustion**
- **Pressurized Fluidized Bed Combustion**
- **Atmospheric Circulating Fluidized Bed Combustion**
- **Pulverized Fuel Boiler**
- **Waste Heat Boiler**

# Fire Tube Boilers


Is the most common boilers in industry :

- Cheap
- Relatively small steam capacities (12,000 kg/hour)
- Low to medium steam pressures (18 kg/cm<sup>2</sup>)
- Operates with oil, gas or solid fuels

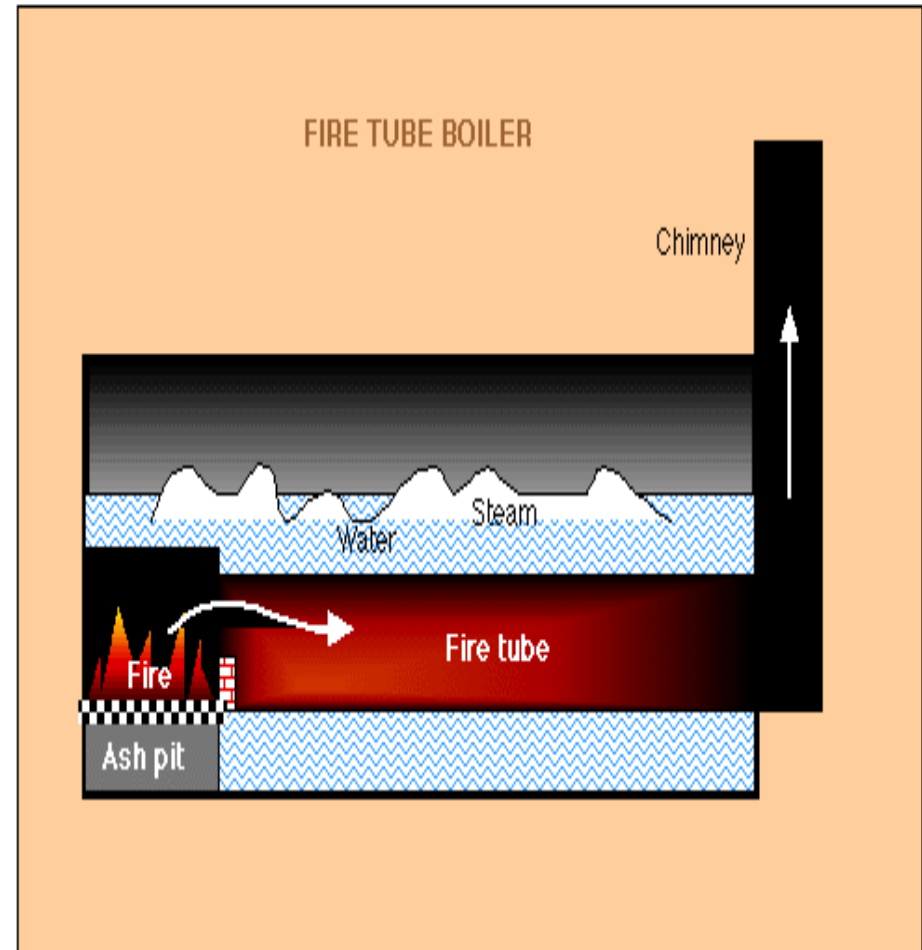





# Thermodynamic Process

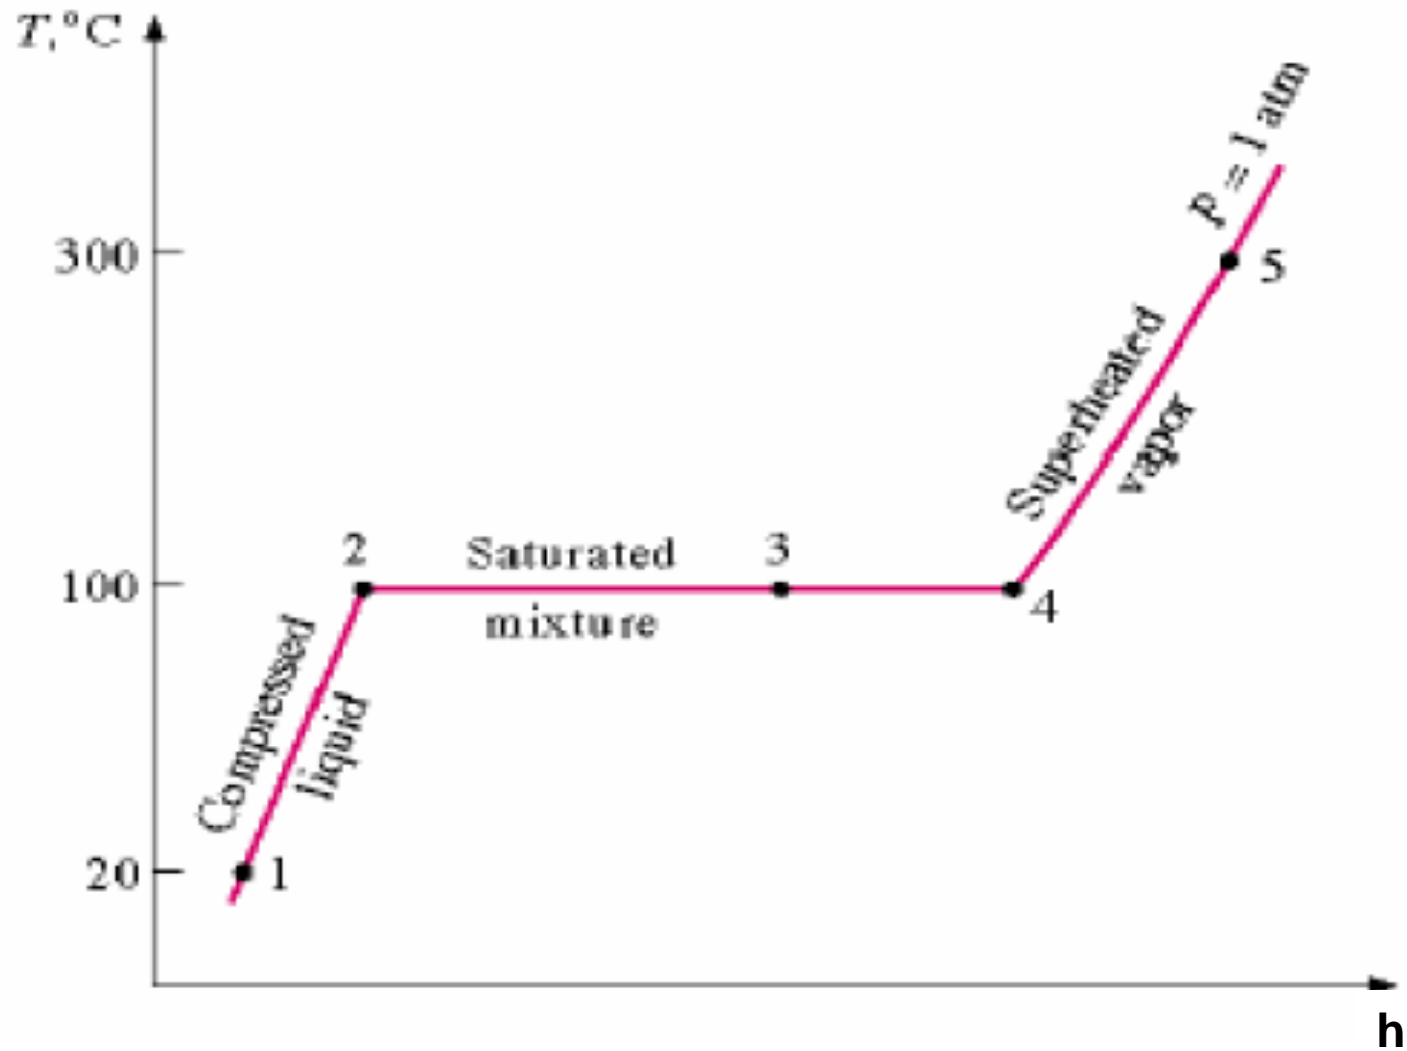

# Thermodynamic Process

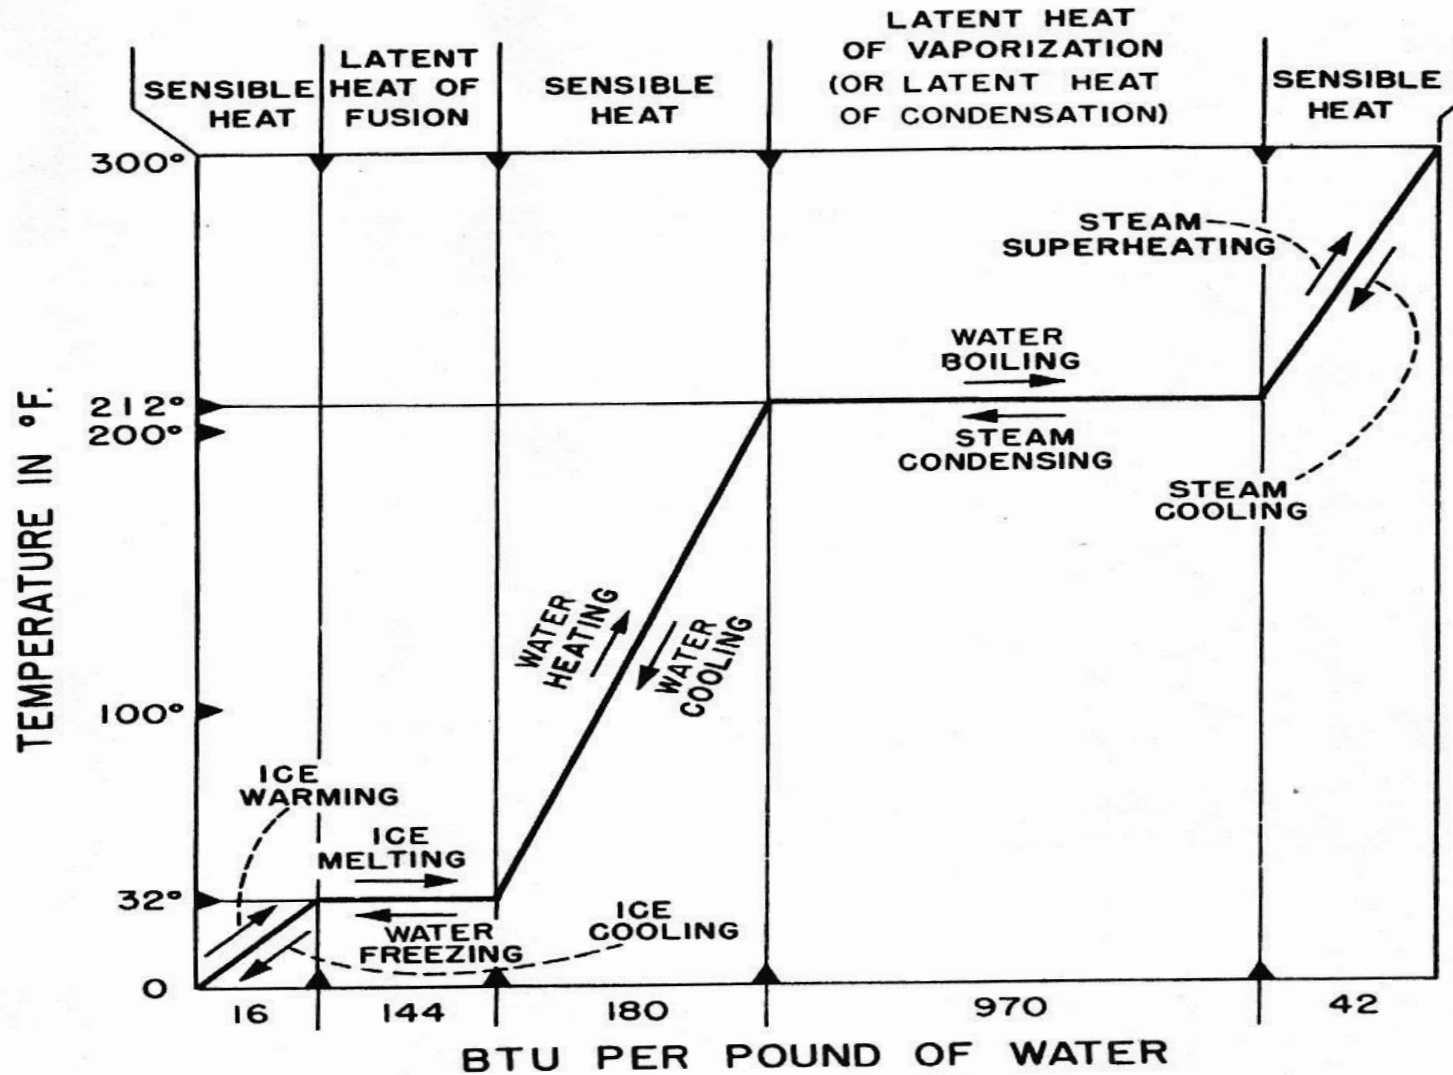

# Thermodynamic Process

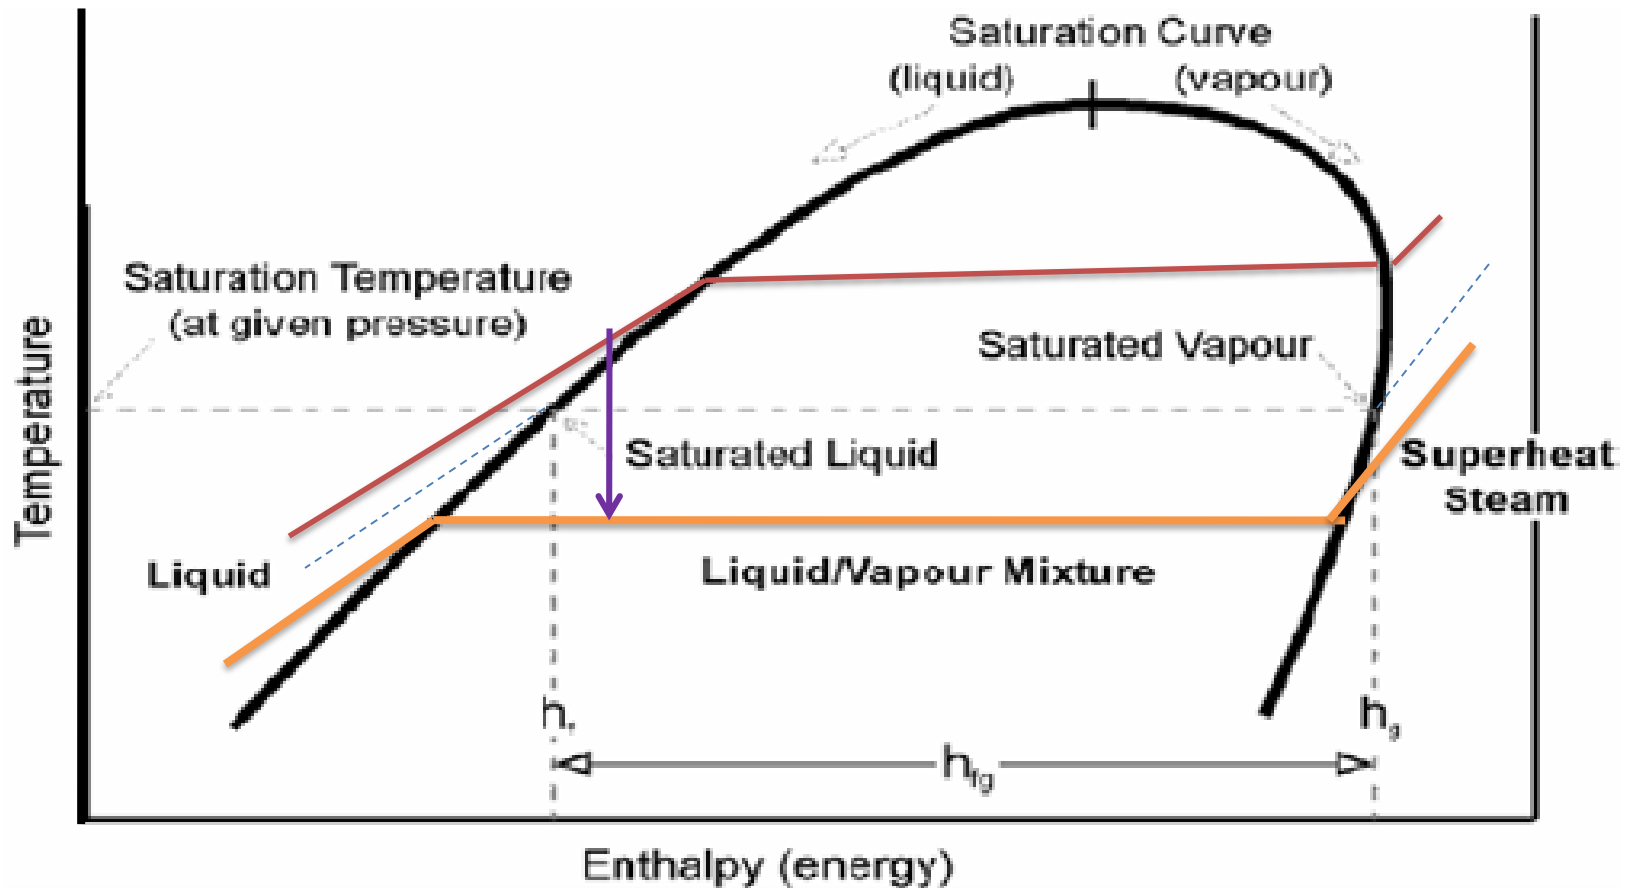

# STEAM PROPERTIES


Pressure (kg/cm <sup>2</sup> )	Temperature °C	Enthalpy in Kcal/kg			Specific Volume (m <sup>3</sup> /kg)
		Water (h <sub>f</sub> )	Evaporation (h <sub>fg</sub> )	Steam (h <sub>g</sub> )	
1	100	100.09	539.06	639.15	1.673
2	120	119.92	526.26	646.18	0.901
3	133	133.42	517.15	650.57	0.616
4	143	143.70	509.96	653.66	0.470
5	151	152.13	503.90	656.03	0.381
6	158	159.33	498.59	657.92	0.321
7	164	165.67	493.82	659.49	0.277
8	170	171.35	489.46	660.81	0.244

# Energy Units

- ❑ Boilers are often rated in “Boiler Horsepower” (BHP) rather than Btus per hour.
- ❑ 1 BHP is defined as the amount of energy it takes to convert 34.5 pounds of water to steam in one hour at 212 degrees Fahrenheit.
- ❑ A boiler HP equals 33,472 Btu/hour.


# Boiling Heat Transfer

## Classification of Boiling

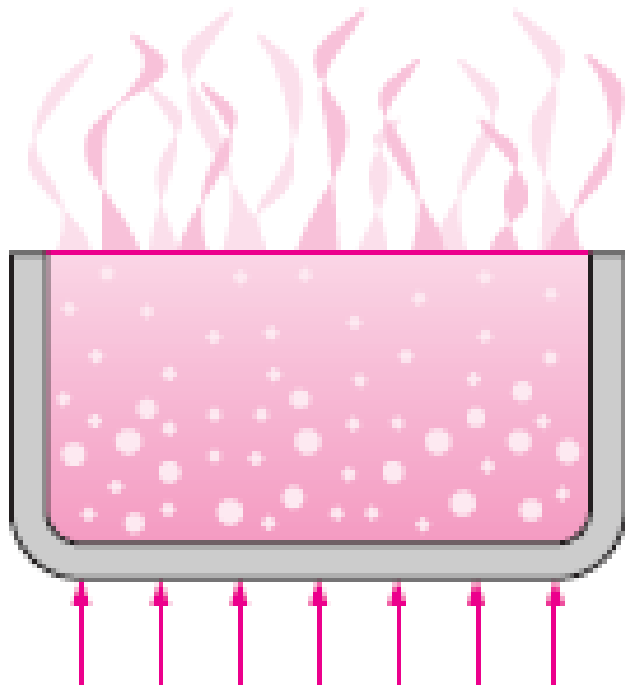

Heating


(a) Pool boiling

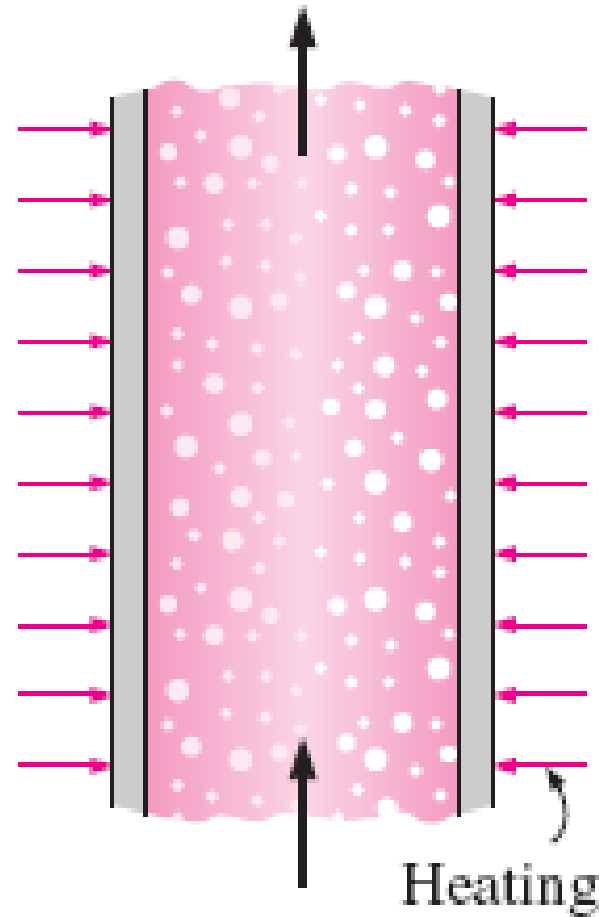


Heating

(b) Flow boiling


# Pool Boiling Regimes

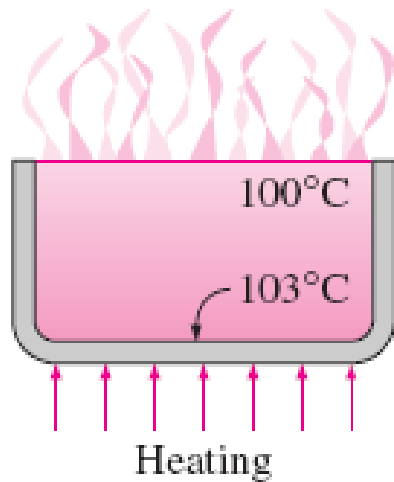


(a) Natural convection boiling

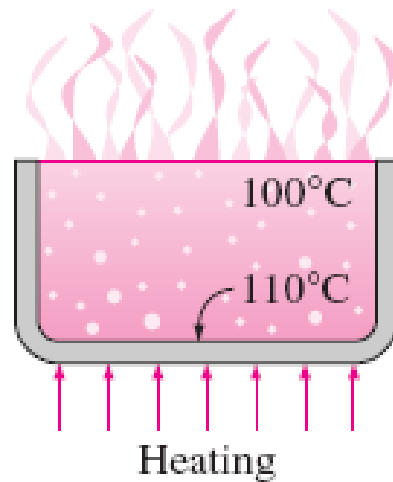

(b) Nucleate boiling

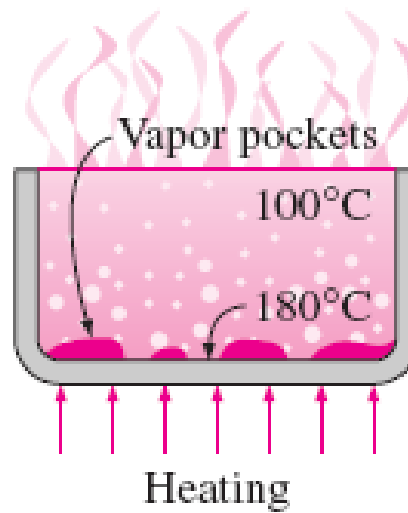


(c) Transition boiling

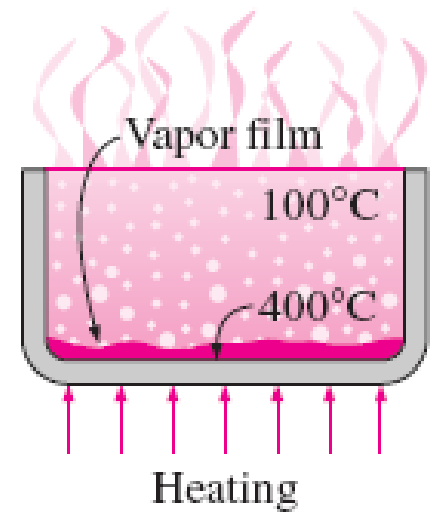


(d) Film boiling

# Boiling Curve

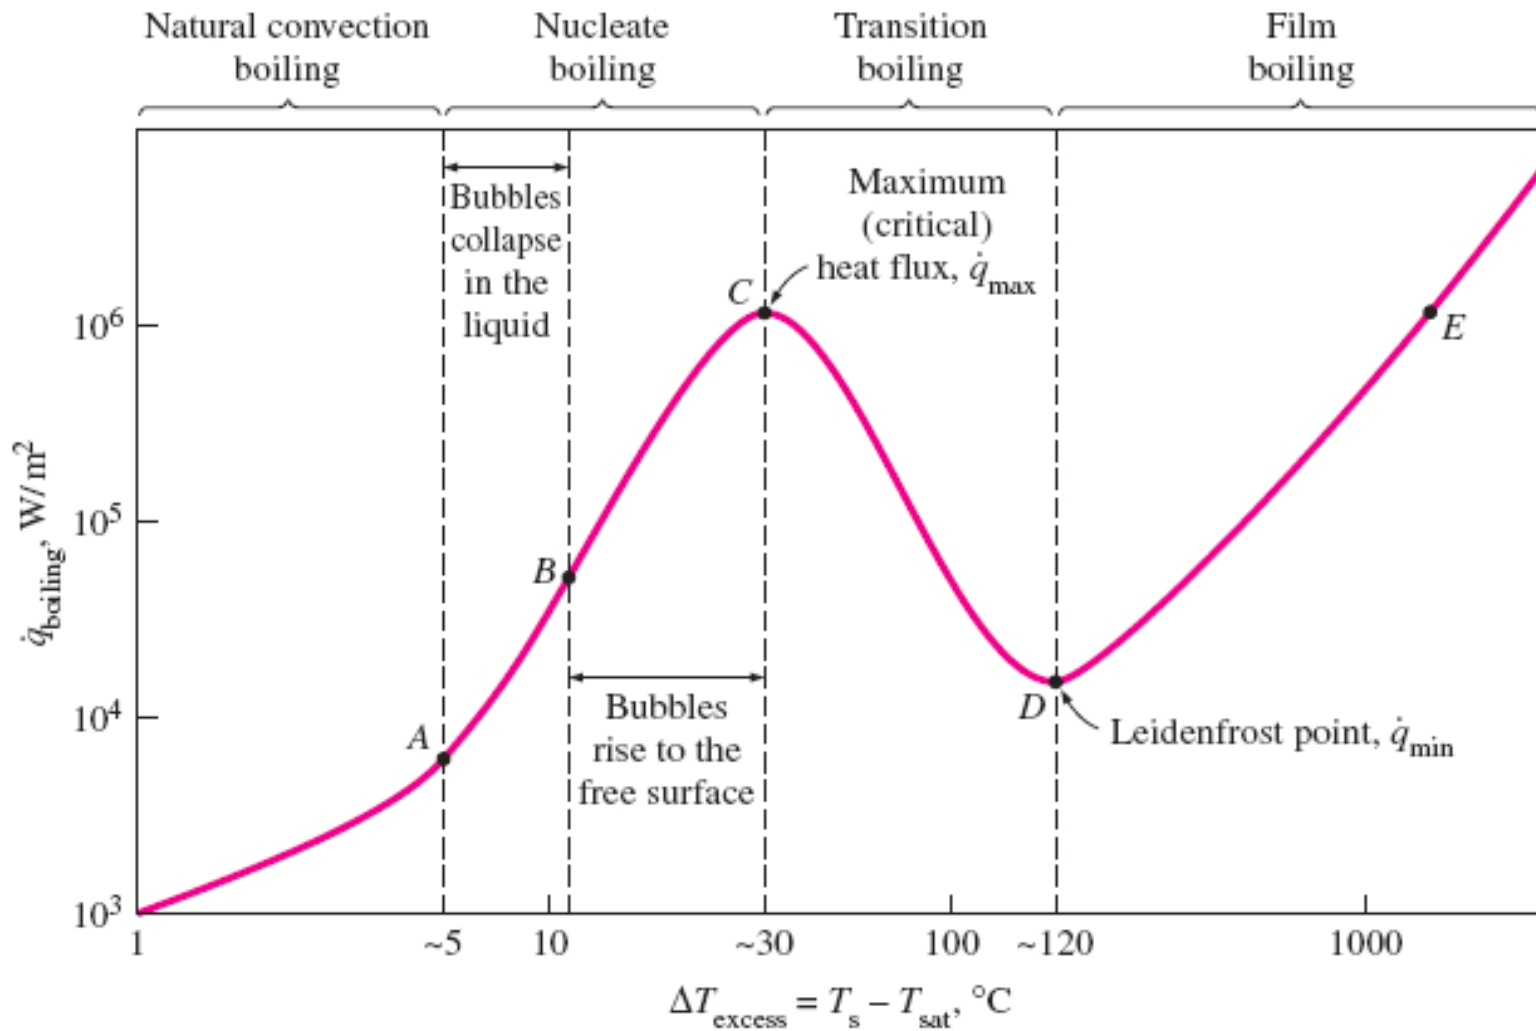

Typical boiling curve for water at 1 atm pressure.

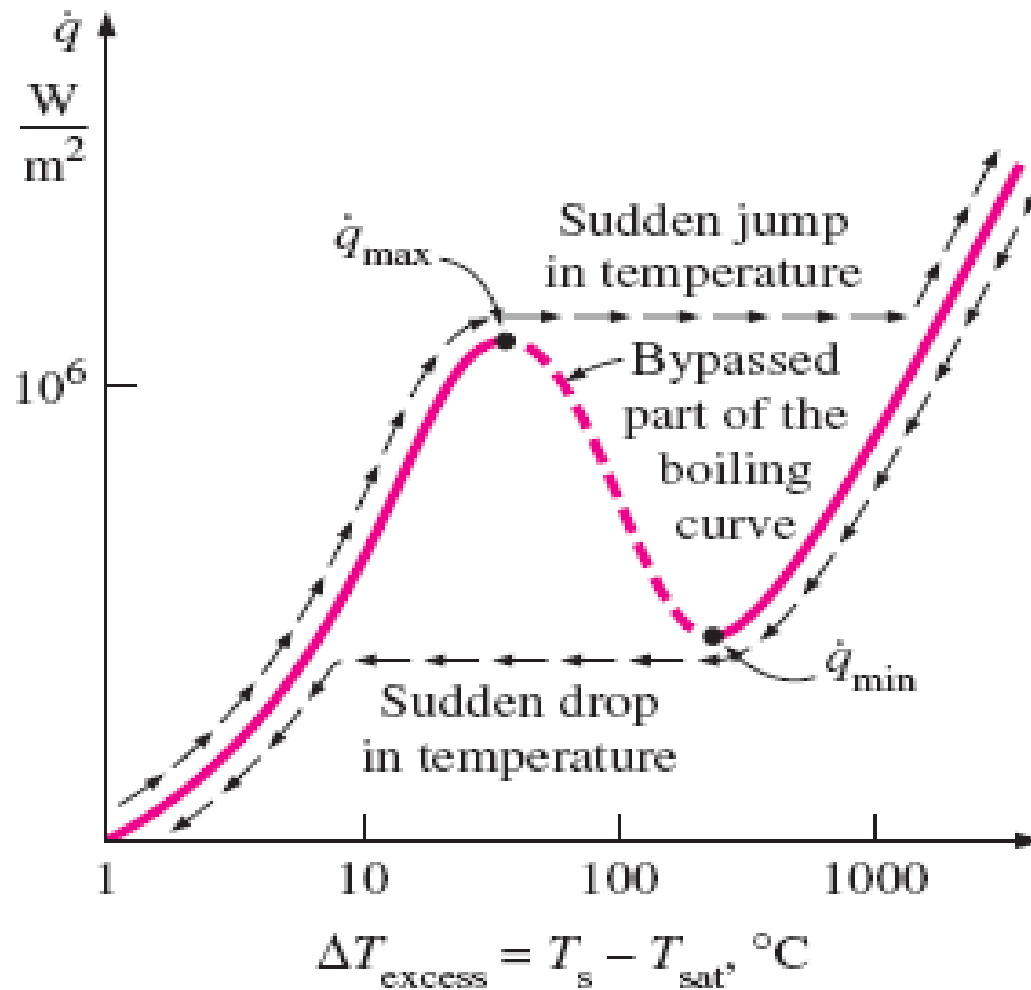

The actual boiling curve obtained with heated platinum wire in water as the heat flux is increased and then decreased.

# Heat Transfer Correlation for PB

$$\dot{q}_{\text{nucleate}} = \mu_l h_{fg} \left[ \frac{g(\rho_l - \rho_v)}{\sigma} \right]^{1/2} \left[ \frac{C_p(T_s - T_{\text{sat}})}{C_{sf} h_{fg} \text{Pr}_l^n} \right]^3$$

Nucleate boiling

$$\dot{q}_{\text{max}} = C_{cr} h_{fg} [\sigma g \rho_v^2 (\rho_l - \rho_v)]^{1/4}$$

Peak heat flux

$$\dot{q}_{\text{min}} = 0.09 \rho_v h_{fg} \left[ \frac{\sigma g (\rho_l - \rho_v)}{(\rho_l + \rho_v)^2} \right]^{1/4}$$


Minimum heat flux

$$\dot{q}_{\text{film}} = C_{\text{film}} \left[ \frac{g k_v^3 \rho_v (\rho_l - \rho_v) [h_{fg} + 0.4 C_{pv} (T_s - T_{\text{sat}})]^{1/4}}{\mu_v D (T_s - T_{\text{sat}})} \right] (T_s - T_{\text{sat}})$$


Film boiling

$$C_{\text{film}} = \begin{cases} 0.62 & \text{for horizontal cylinders} \\ 0.67 & \text{for spheres} \end{cases}$$


# Heat Transfer Between Gas and Water

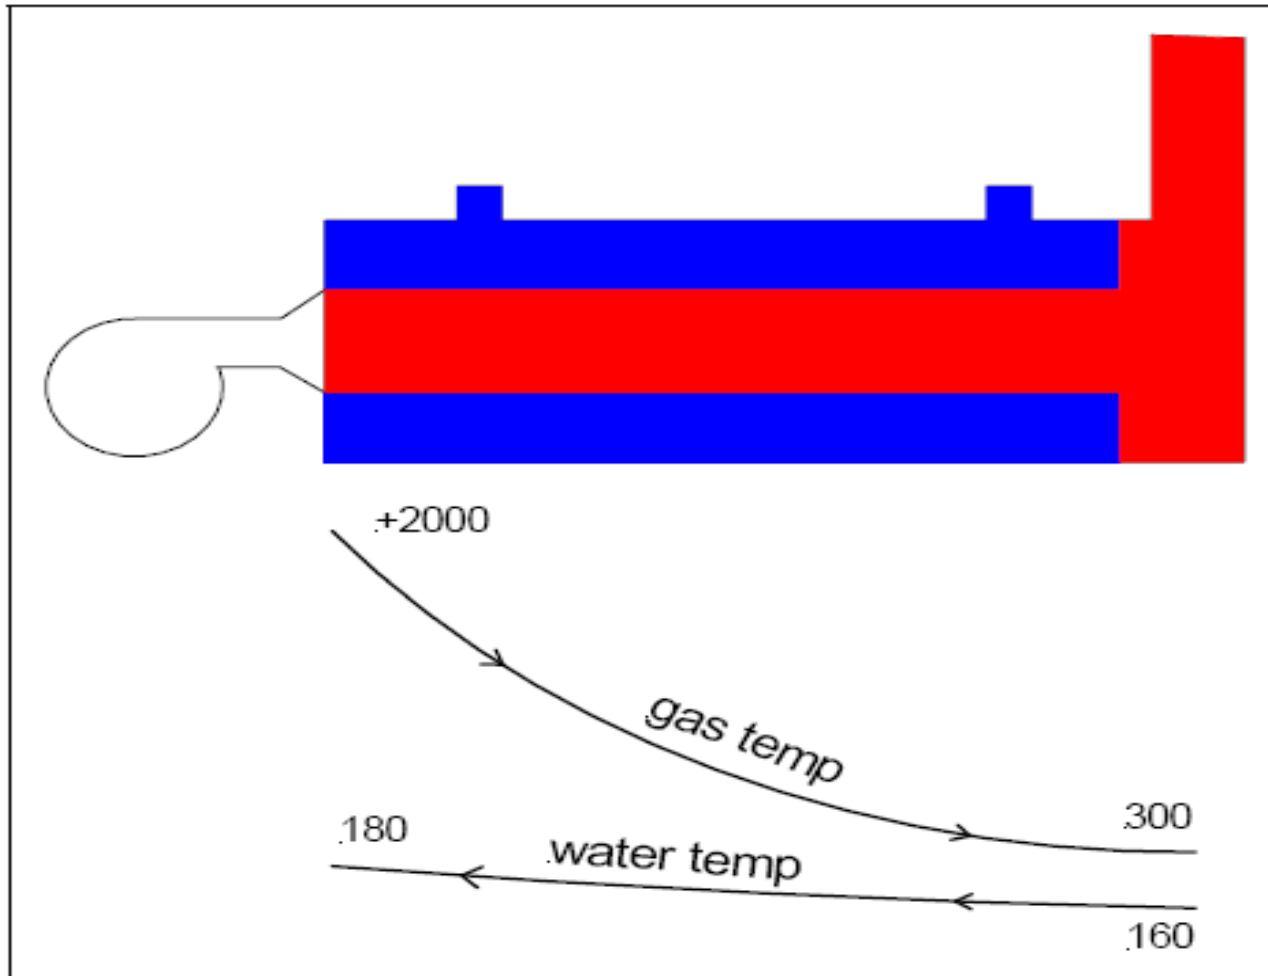

# Heat Transfer Process

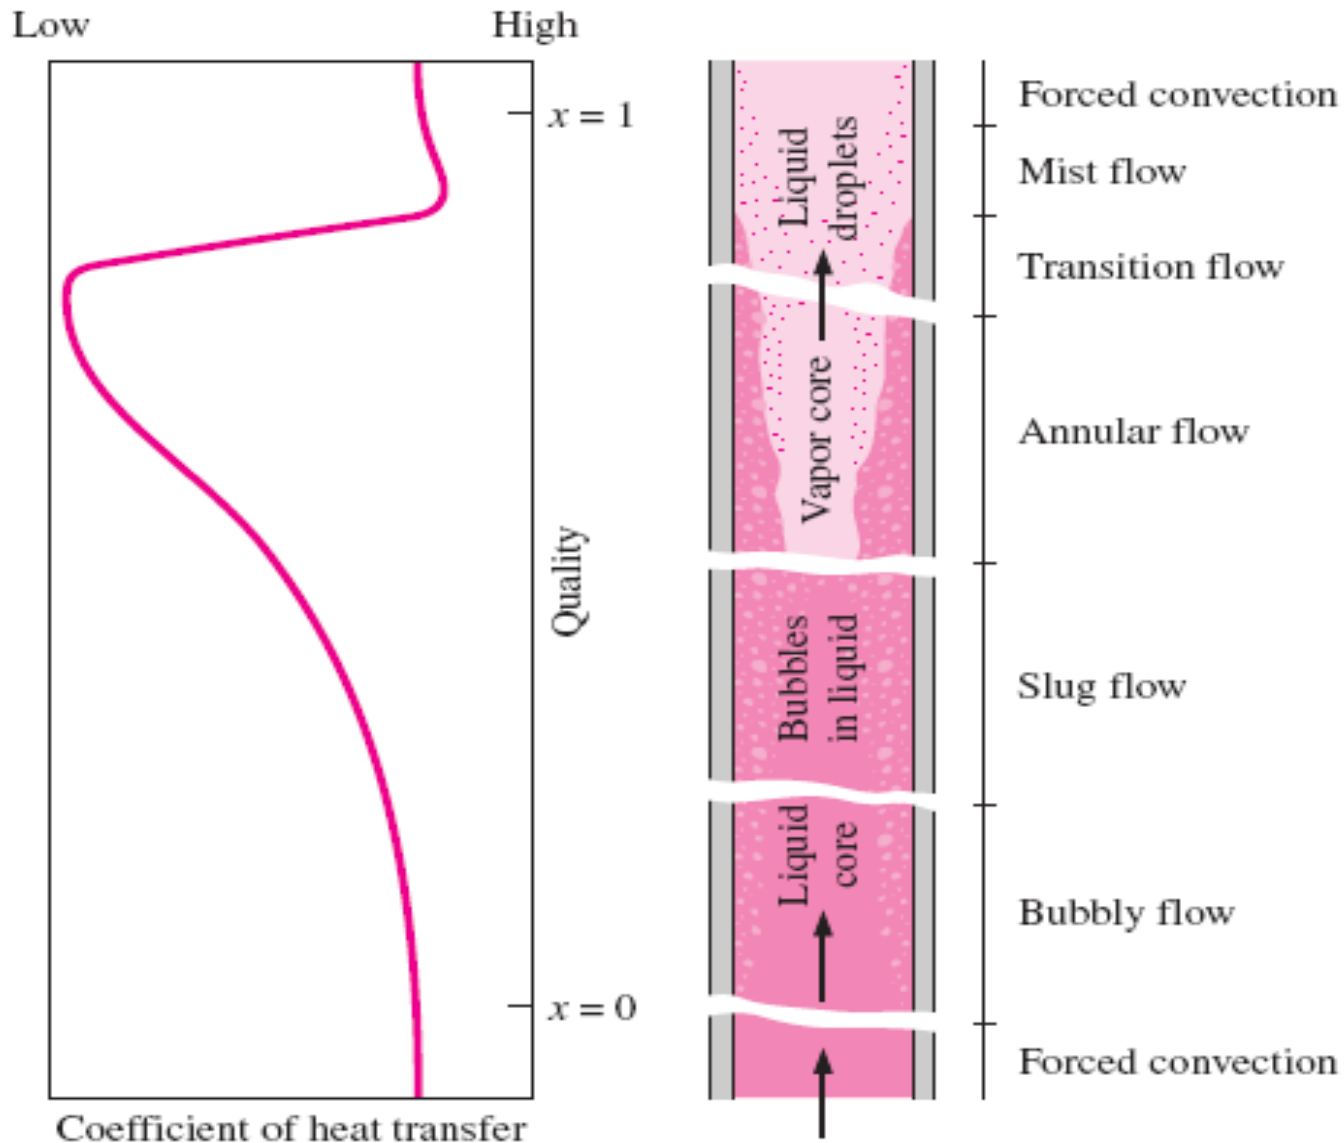

# Thermal Resistance

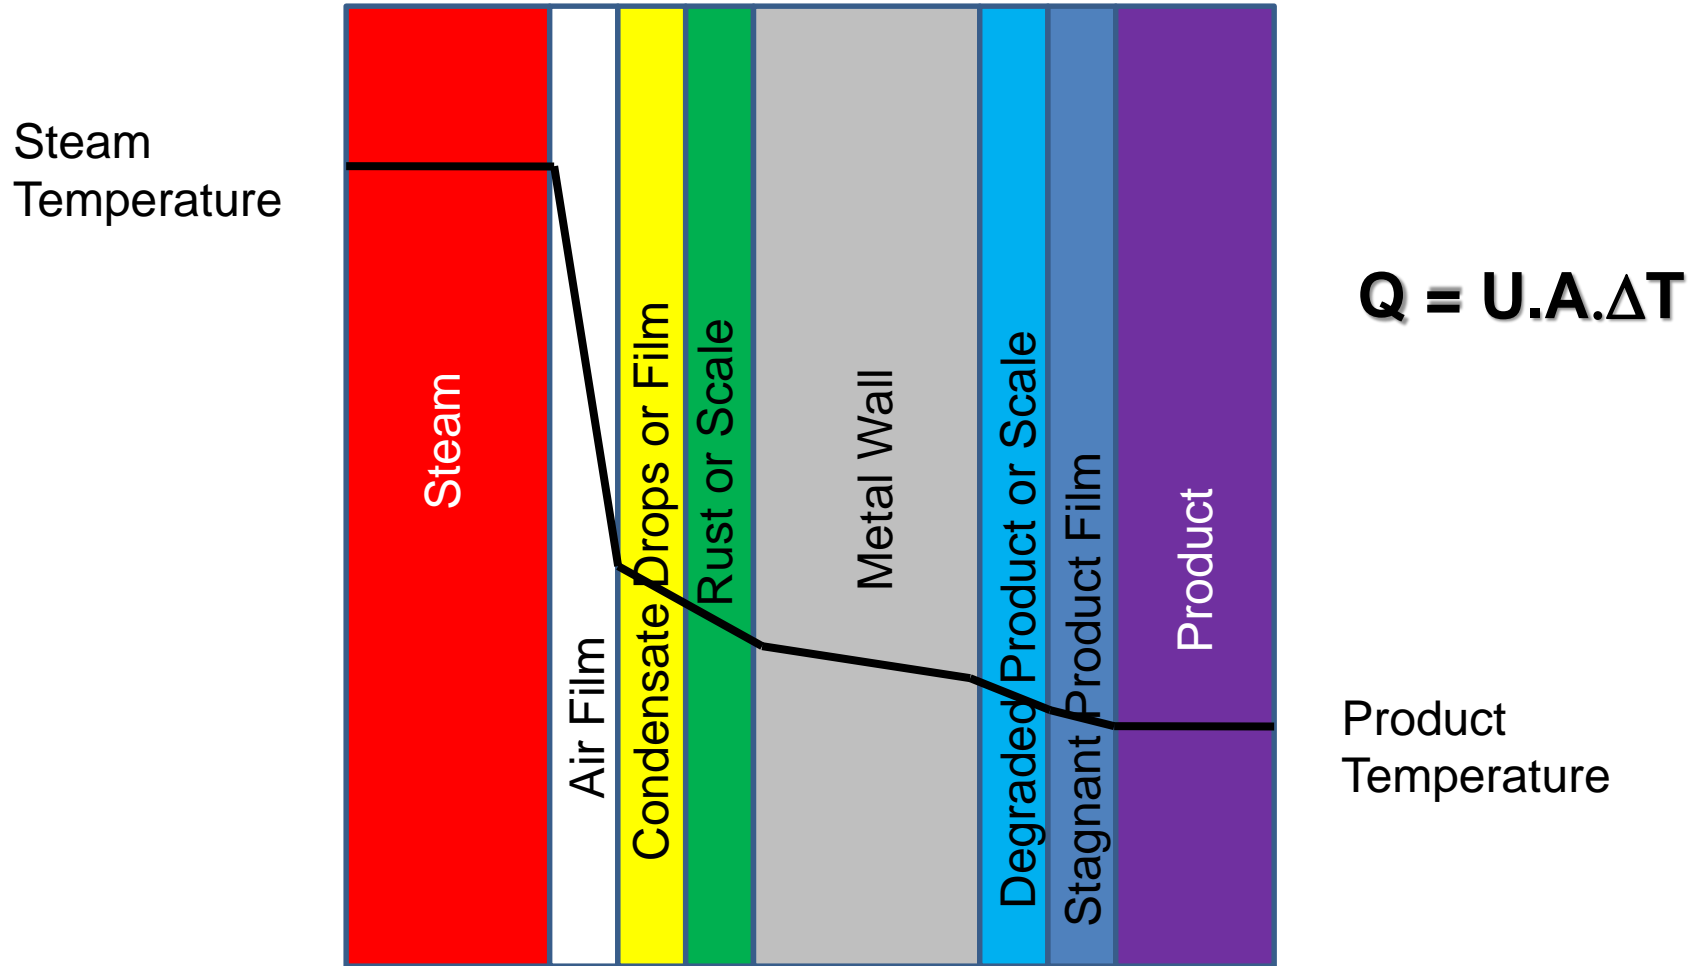

# BOILER EFFICIENCY

- ❑ The several different methods of defining the efficiency of boilers can present a confusing picture.
- ❑ As prescribed by the ASME Power Test Code PTC 4, the fuel-to-steam efficiency of a boiler can be determined by two methods: the **Input-Output Method**, and the **Heat Loss Method**.

# Input-Output (Direct) Method

- The Input-Output efficiency measurement method is based on the ratio of the output-to-input of the boiler.
- It is calculated by dividing the boiler output (in BTUs) by the boiler input (in BTUs) and multiplying by 100.
- The actual input and output of the boiler are determined through instrumentation and the resulting data is used in calculations that determine the fuel-to-steam efficiency.

# Input-Output (Direct) Method

$$\text{Boiler Efficiency } (\eta) = \frac{\text{Heat Output}}{\text{Heat Input}} \times 100$$

$$\text{Boiler Efficiency } (\eta) = \frac{Q \times (h_g - h_f)}{q \times \text{GCV}} \times 100$$

# Input-Output (Direct) Method

Parameters to be monitored for the calculation of boiler efficiency by direct method are:

- ❖ Quantity of steam generated per hour ( $Q$ ) in kg/hr.
- ❖ Quantity of fuel used per hour ( $q$ ) in kg/hr.
- ❖ The working pressure (in kg/cm<sup>2</sup>(g)) and superheat temperature (oC), if any
- ❖ The temperature of feed water (oC)
- ❖ Type of fuel and gross calorific value of the fuel (GCV) in kcal/kg of fuel

# Efficiency Calculation by I/O Method

Type of boiler: Coal fired Boiler

## Heat input data

Qty of coal consumed : 1.8 TPH  
GCV of coal : 3200 K.Cal/kg

## Heat output data

- Qty of steam gen : 8 TPH
- Steam pr/temp: 10 kg/cm<sup>2</sup>(g)/180°C
- Enthalpy of steam(sat) at 10 kg/cm<sup>2</sup>(g) pressure : 665 K.Cal/kg
- Feed water temperature : 85°C
- Enthalpy of feed water : 85 K.Cal/kg

**Find out the boiler efficiency ?**

**Find out the Evaporation Ratio?**

$$\text{Boiler efficiency } (\eta): = \frac{\mathbf{Q \times (H - h)}}{\mathbf{(q \times GCV)}} \times \mathbf{100}$$

Where **Q** = Quantity of steam generated per hour (kg/hr)

**H** = Enthalpy of saturated steam (kcal/kg)

**h** = Enthalpy of feed water (kcal/kg)

**q** = Quantity of fuel used per hour (kg/hr)

**GCV** = Gross calorific value of the fuel (kcal/kg)

$$\begin{aligned} \text{Boiler efficiency } (\eta) &= \frac{8 \text{ TPH} \times 1000 \text{ Kg/T} \times (665 - 85) \times 100}{1.8 \text{ TPH} \times 1000 \text{ Kg/T} \times 3200} \\ &= \mathbf{80.0\%} \end{aligned}$$

$$\begin{aligned} \text{Evaporation Ratio} &= 8 \text{ Tonne of steam} / 1.8 \text{ Ton of coal} \\ &= \mathbf{4.4} \end{aligned}$$

# Heat Loss (Indirect) Method

- ❑ The Heat Balance efficiency measurement method is based on accounting for all the heat losses of the boiler.
- ❑ The actual measurement method consists of subtracting from 100 % the total percentage of: A) stack, B) radiation, and C) convection losses.
- ❑ The resulting value is the boiler's fuel-to-steam efficiency. The heat loss method accounts for stack, radiation and convection losses.

# Indirect Method

Efficiency of boiler (n) =  $100 - (i + ii + iii + iv + v + vi + vii)$

Whereby the principle losses that occur in a boiler are loss of heat due to:

- i. Dry flue gas
- ii. Evaporation of water formed due to H<sub>2</sub> in fuel
- iii. Evaporation of moisture in fuel
- iv. Moisture present in combustion air
- v. Unburnt fuel in fly ash
- vi. Unburnt fuel in bottom ash
- vii. Radiation and other unaccounted losses

# Indirect Method

The data required for calculation of boiler efficiency using the indirect method are:

- ❖ Ultimate analysis of fuel (H<sub>2</sub>, O<sub>2</sub>, S, C, moisture content, ash content)
- ❖ Percentage of oxygen or CO<sub>2</sub> in the flue gas
- ❖ Flue gas temperature in °C (T<sub>f</sub>)
- ❖ Ambient temperature in °C (T<sub>a</sub>) and humidity of air in kg/kg of dry air
- ❖ GCV of fuel in kcal/kg
- ❖ Percentage combustible in ash (in case of solid fuels)
- ❖ GCV of ash in kcal/kg (in case of solid fuels)


# COMPONENTS OF EFFICIENCY

- Flue gas temperature
- Stack Losses
- Heating medium temperatures (steam pressures in the case of steam boilers)
- Radiation and convection losses
- Excess air

# COMPONENTS OF EFFICIENCY

- Ambient air temperature
- Heating Medium Temperatures
- Fuel specification
- Steam quality (in the case of steam boilers)

# The Flow of Energy

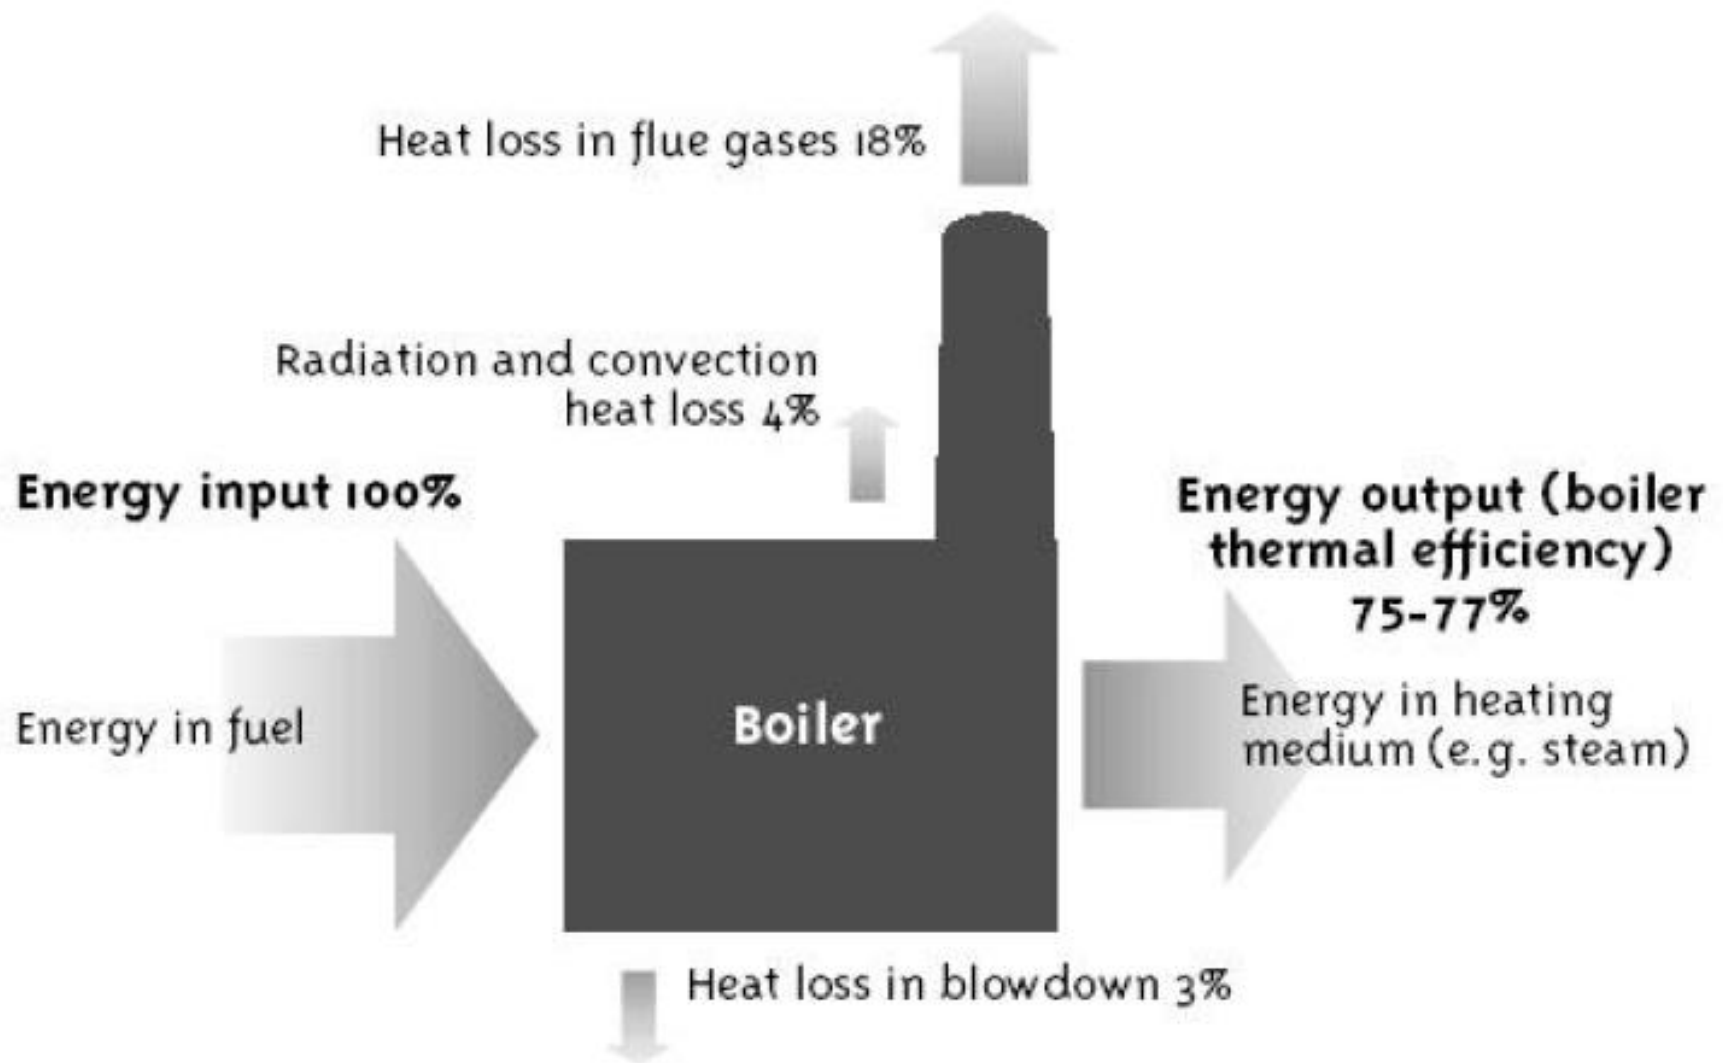

# Boiler Heat Losses



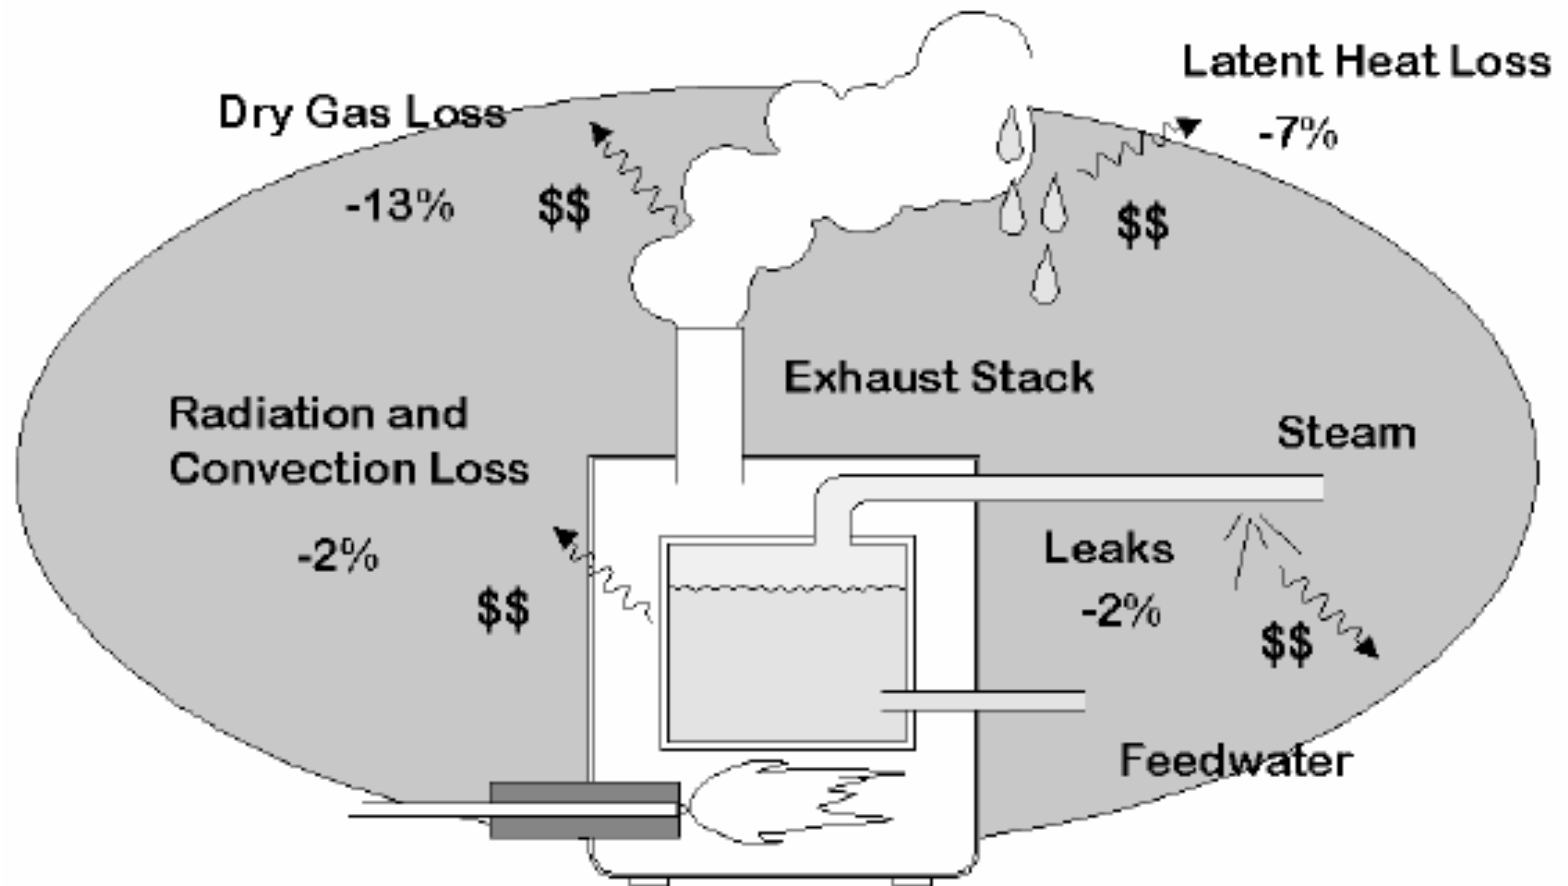


Figure 2. Boiler Heat Losses

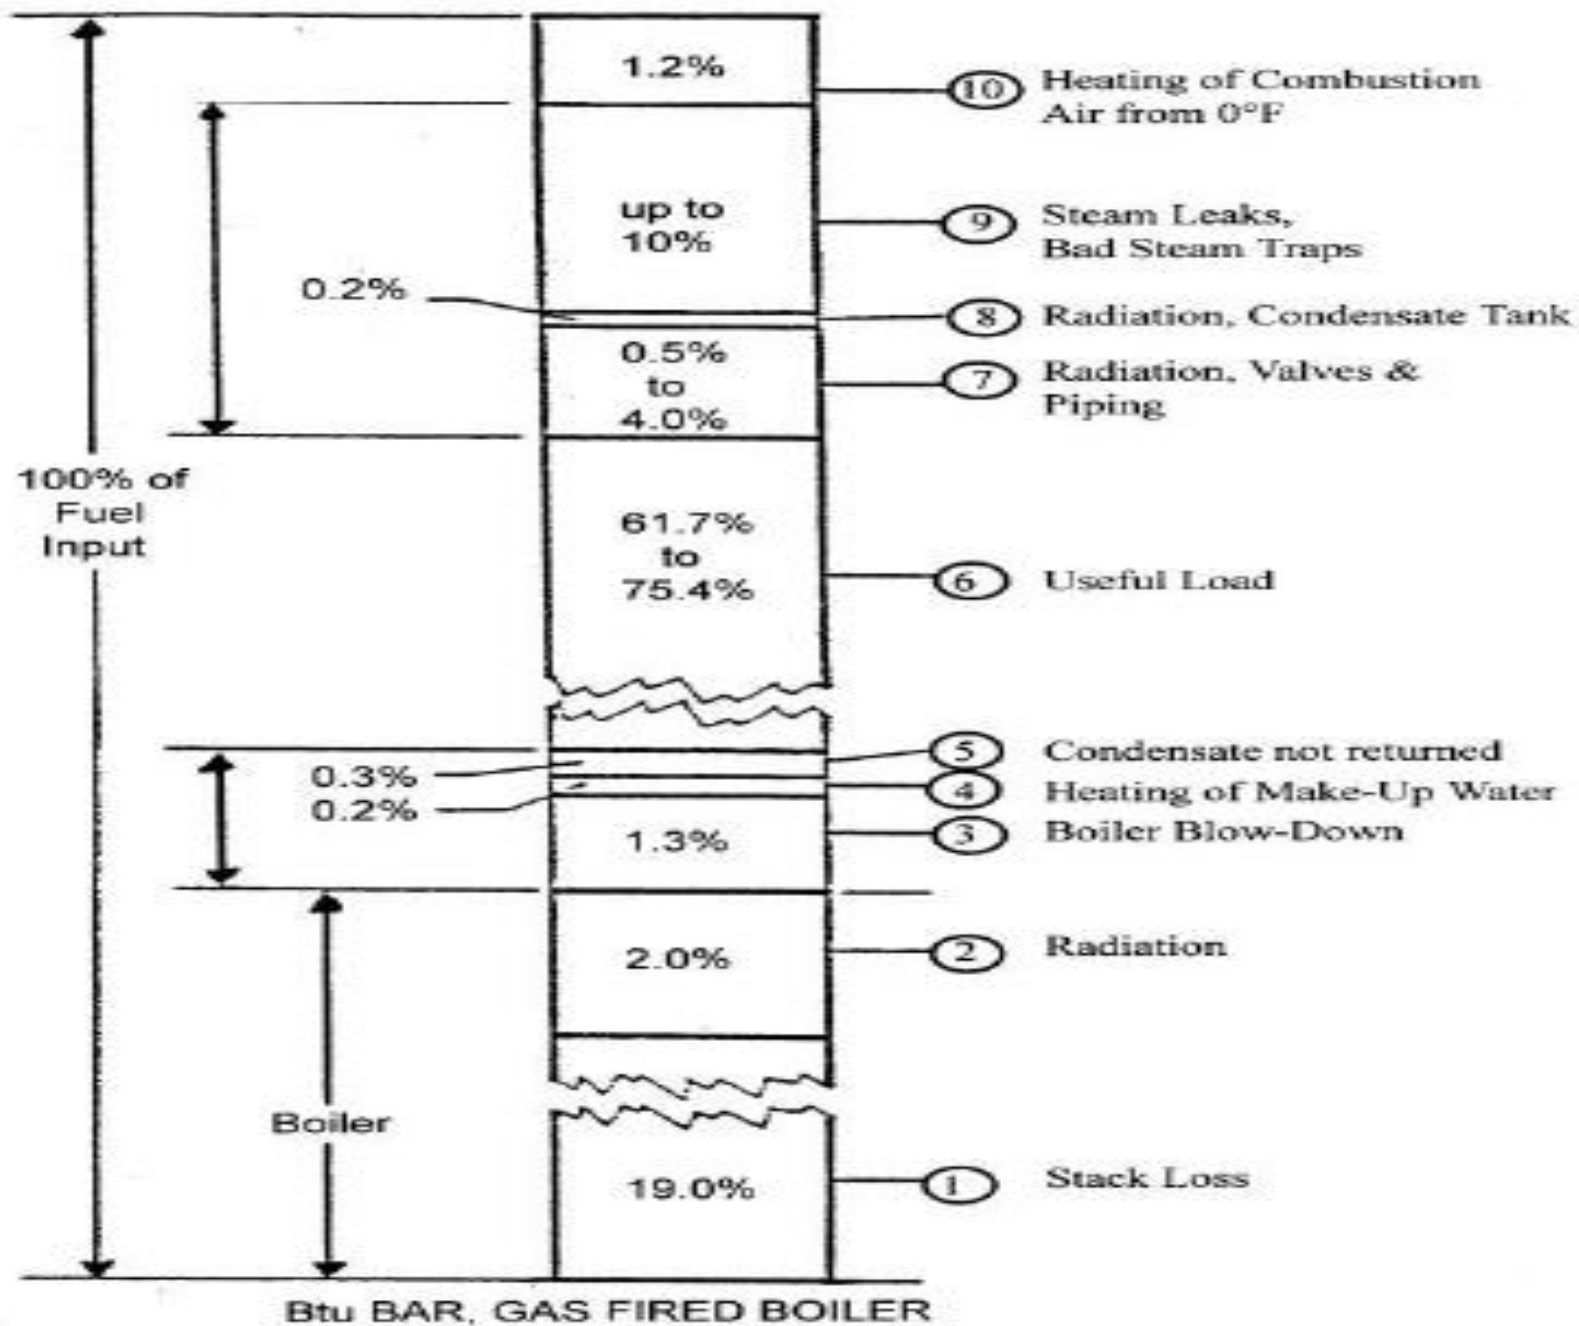

# What are the losses that occur in a boiler?

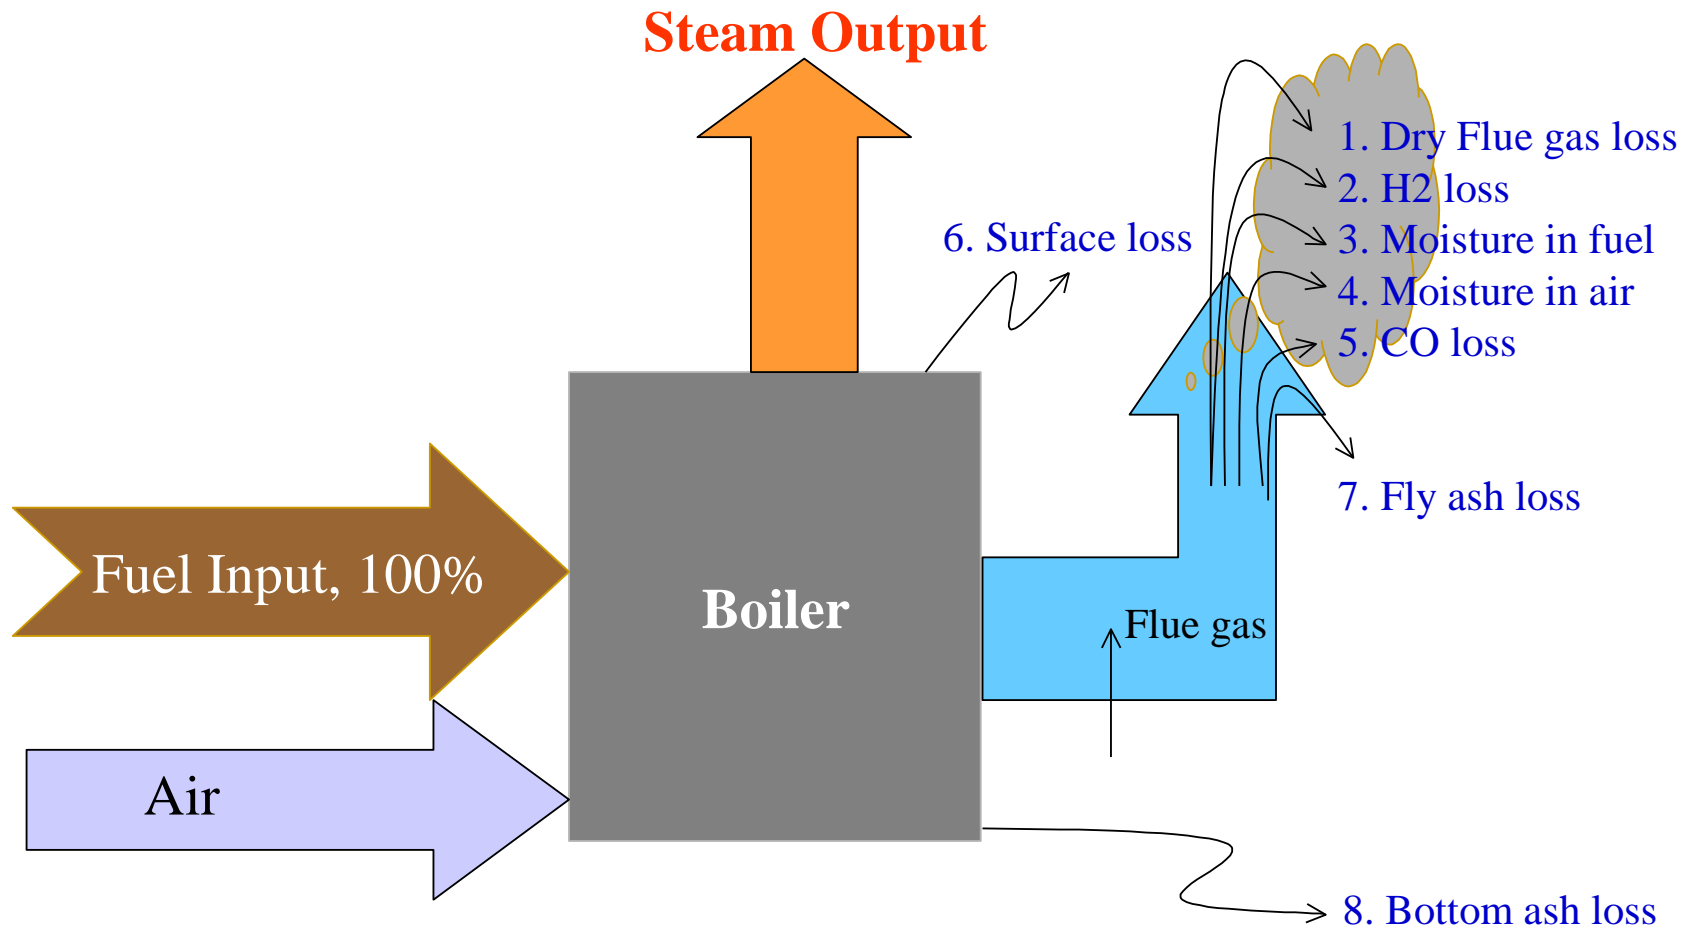

$$\text{Efficiency} = 100 - (1+2+3+4+5+6+7+8)$$

(by In Direct Method)

# Effect of Excess Air on Boiler Efficiency

Combustion Efficiency for Natural Gas						
Excess % Air    Oxygen		Combustion Efficiency				
		Flue gas temperature less combustion air temp, °F				
		200	300	400	500	600
9.5	2.0	85.4	83.1	80.8	78.4	76.0
15.0	3.0	85.2	82.8	80.4	77.9	75.4
28.1	5.0	84.7	82.1	79.5	76.7	74.0
44.9	7.0	84.1	81.2	78.2	75.2	72.1
81.6	10.0	82.8	79.3	75.6	71.9	68.2

Assumes complete combustion with no water vapor in the combustion air.

On well-designed natural gas-fired systems, an excess air level of 10% is attainable. An often stated rule of thumb is that boiler efficiency can be increased by 1% for each 15% reduction in excess air or 40°F reduction in stack gas temperature.

# Example of Improving Efficiency

A boiler operates for 8,000 hours per year and consumes 500,000 MBtu of natural gas while producing 45,000 lb/hr of 150 psig steam.

Stack gas measurements indicate an excess air level of 44.9% with a flue gas less combustion air temperature of 400°F.

From the table, the boiler combustion efficiency is 78.2% (E1).

Tuning the boiler reduces the excess air to 9.5% with a flue gas less combustion air temperature of 300°F.

The boiler combustion efficiency increases to 83.1% (E2).

Assuming a steam value of \$4.50/MBtu, the annual cost savings are:

**Cost Savings = Fuel Consumption x (1 - E1/E2) x  
steam cost = 29,482 MBtu/yr x \$4.50/MBtu = \$132,671  
annually**

# Enhancement of Boiler Efficiency

Boiler HP	Fuel Cost			
	\$0.75	\$1.00	\$1.50	\$2.00
100	\$3,635	\$4,847	\$7,271	\$9,694
200	\$7,271	\$9,694	\$14,541	\$19,389
300	\$10,906	\$14,541	\$21,812	\$29,083
500	\$18,177	\$24,236	\$36,354	\$48,471
800	\$29,083	\$38,777	\$58,166	\$77,554

Table 1. Possible savings per year with a 5% improvement in boiler efficiency (based on 3000 hours per year of operation).


# Energy Conservation Opportunities in Boilers

# 1. Reduce Stack Temperature

- Stack temperatures greater than  $200^{\circ}\text{C}$  indicates potential for recovery of waste heat.
- It also indicate the scaling of heat transfer/recovery equipment and hence the urgency of taking an early shut down for water / flue side cleaning.

➤  $22^{\circ}\text{C}$  reduction in flue gas temperature increases boiler efficiency by 1%

# Flue Temperature vs Efficiency (FO)

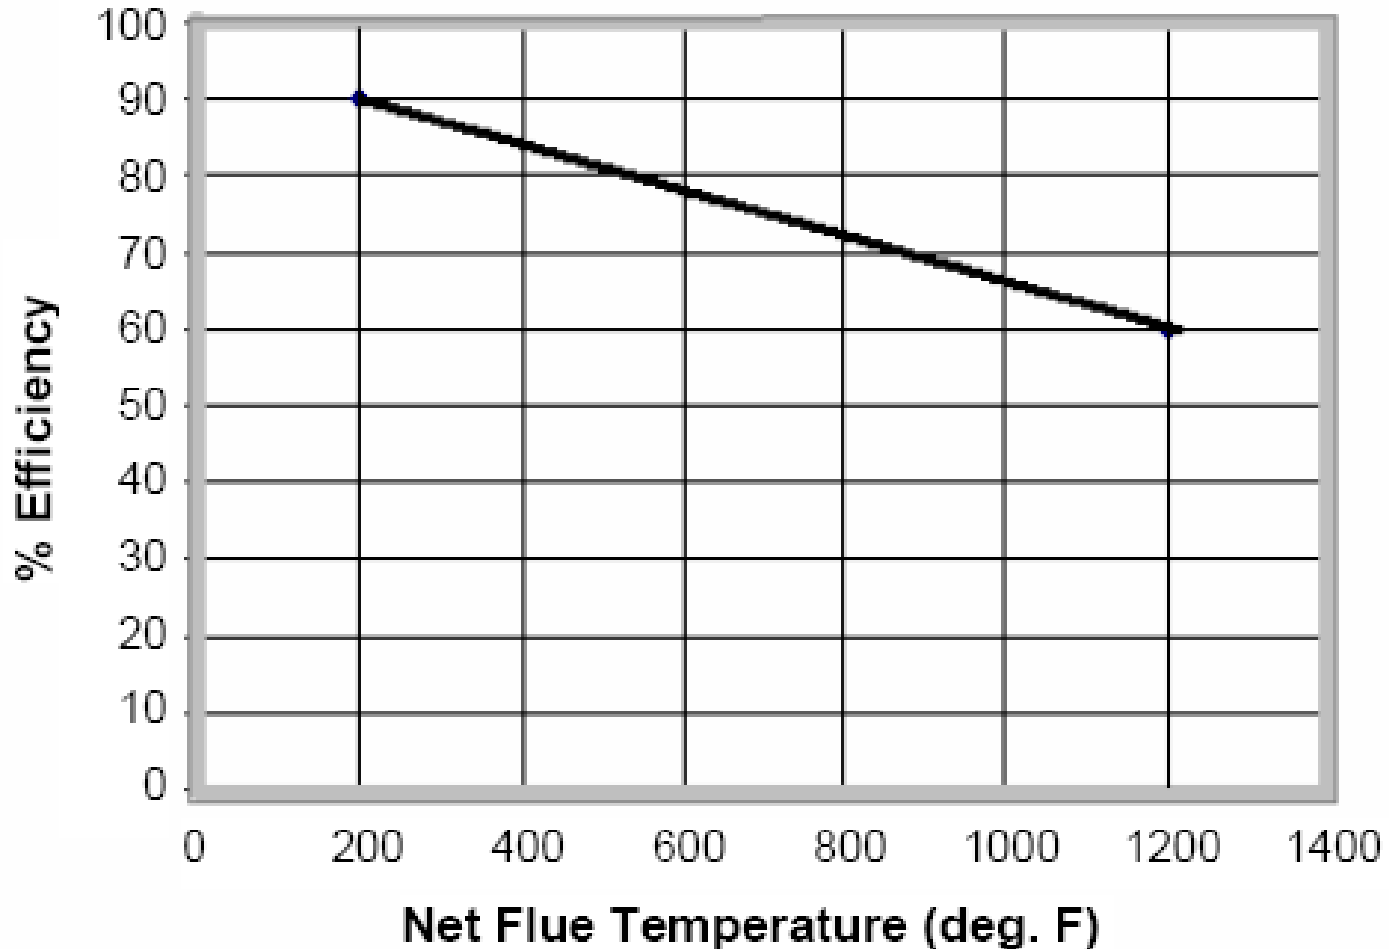

## 2. Combustion Air Preheating

- Combustion air preheating is an alternative to feedwater heating.
- In order to improve thermal efficiency by 1%, the combustion air temperature must be raised by 20 °C.

# 3. Complete Combustion

- Incomplete combustion can arise from a shortage of air or surplus of fuel or poor distribution of fuel.
- **In the case of oil and gas fired systems**, CO or smoke with normal or high excess air indicates burner system problems.  
**Example:** Poor mixing of fuel and air at the burner. Poor oil fires can result from improper viscosity, worn tips, carbonization on tips and deterioration of diffusers.
- **With coal firing**: Loss occurs as grit carry-over or carbon-in-ash (2% loss).  
**Example :** In chain grate stokers, large lumps will not burn out completely, while small pieces and fines may block the air passage, thus causing poor air distribution.  
Increase in the fines in pulverized coal also increases carbon loss.


## 4. Control Excess Air For Every 1% Reduction In Excess Air ,0.6% Rise In Efficiency

The optimum excess air level varies with furnace design, type of burner, fuel and process variables.. **Install oxygen trim system**


**TABLE 2.5 EXCESS AIR LEVELS FOR DIFFERENT FUELS**

<b>Fuel</b>	<b>Type of Furnace or Burners</b>	<b>Excess Air (% by wt)</b>
Pulverised coal	Completely water-cooled furnace for slag-tap or dry-ash removal	15-20
	Partially water-cooled furnace for dry-ash removal	15-40
Coal	Spreader stoker	30-60
	Water-cooler vibrating-grate stokers	30-60
	Chain-grate and traveling-grate stokers	15-50
	Underfeed stoker	20-50
Fuel oil	Oil burners, register type	15-20
	Multi-fuel burners and flat-flame	20-30
Natural gas	High pressure burner	5-7
Wood	Dutch over (10-23% through grates) and Hofft type	20-25
Bagasse	All furnaces	25-35
Black liquor	Recovery furnaces for draft and soda-pulping processes	30-40

# Effect of Excess Air on Combustion Gas Concentrations

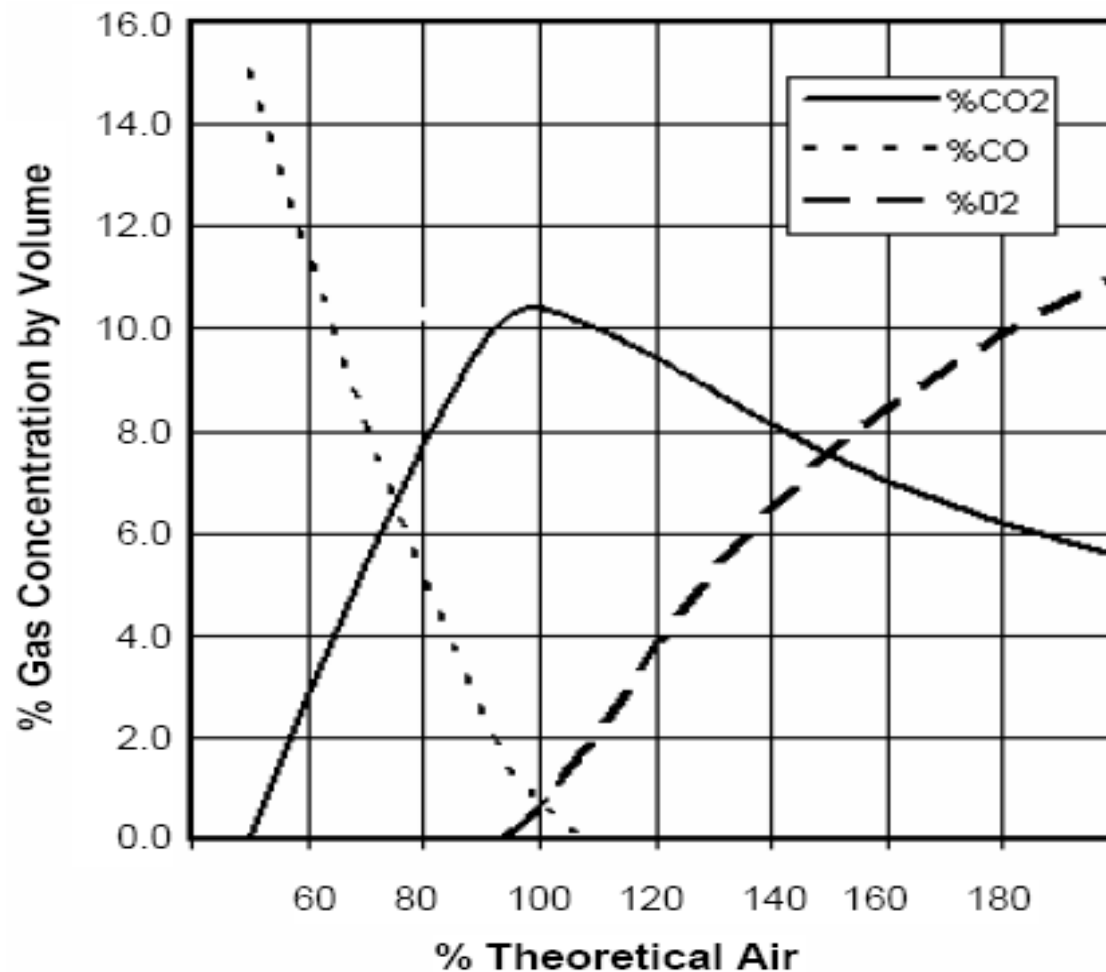


# Combustion Efficiency vs Excess Air (FO)

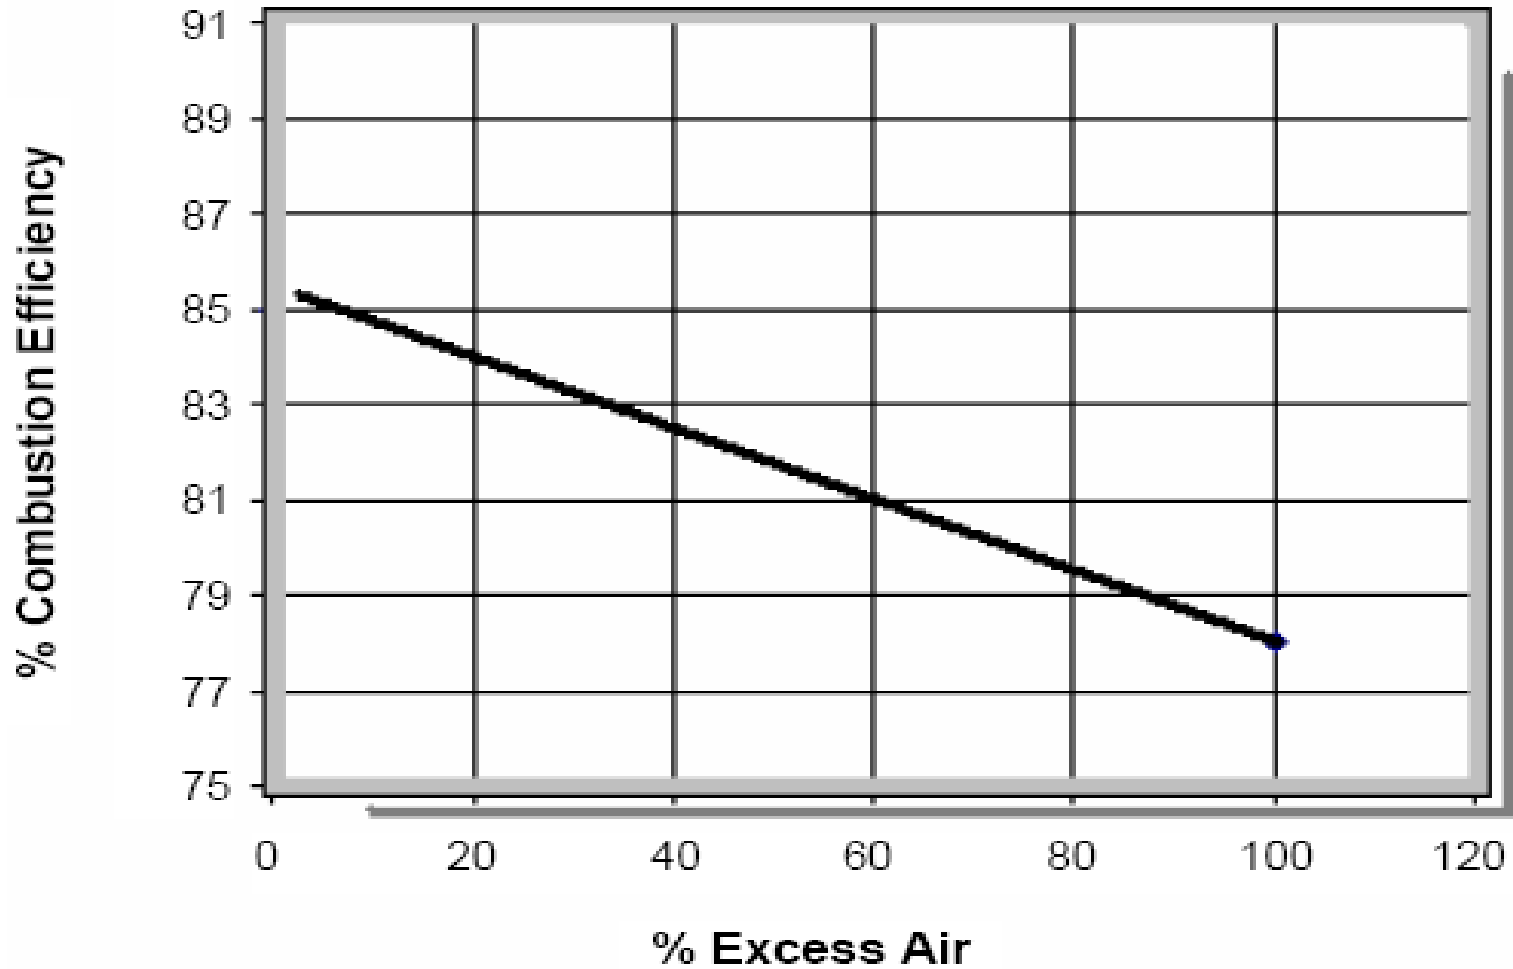

# 5. Feed Water Preheating using Economiser

- For an older shell boiler, with a flue gas exit temperature of  $260^{\circ}\text{C}$ , an economizer could be used to reduce it to  $200^{\circ}\text{C}$ , Increase in overall thermal efficiency would be in the order of 3%.
- Condensing economizer(N.Gas) Flue gas reduction up to  $65^{\circ}\text{C}$

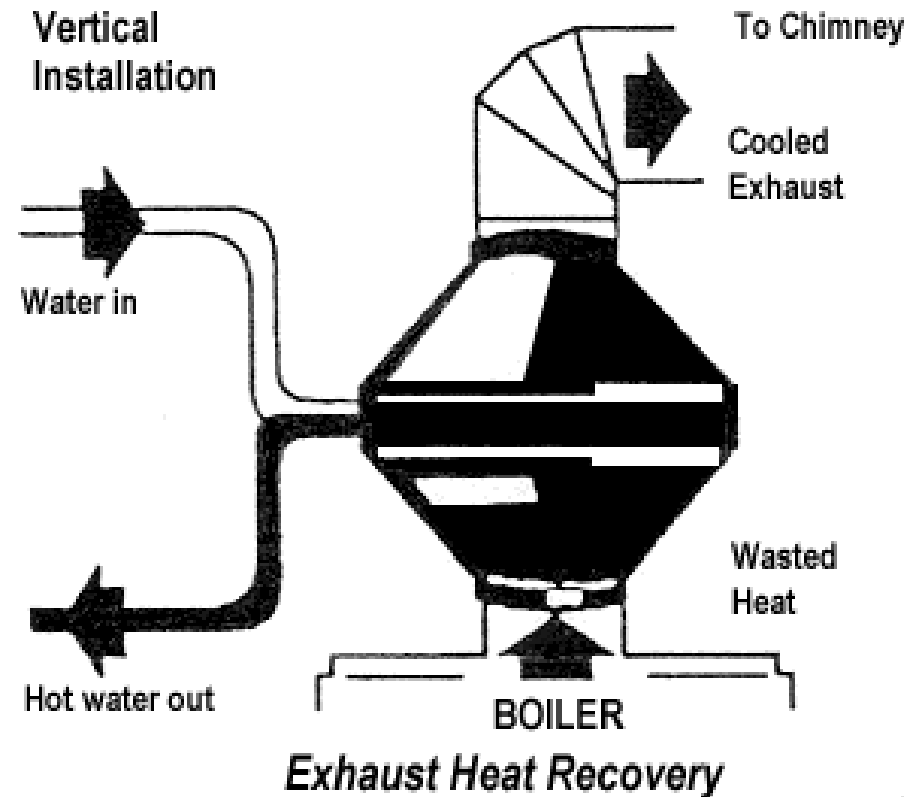

➤  $6^{\circ}\text{C}$  raise in feed water temperature, by economiser/condensate recovery, corresponds to a 1% saving in fuel consumption

## 6. Reduction of Scaling and Soot Losses

- In oil and coal-fired boilers, soot buildup on tubes acts as an insulator against heat transfer. Any such deposits should be removed on a regular basis. Elevated stack temperatures may indicate excessive soot buildup. Also same result will occur due to scaling on the water side.
- High exit gas temperatures at normal excess air indicate poor heat transfer performance. This condition can result from a gradual build-up of gas-side or waterside deposits. Waterside deposits require a review of water treatment procedures and tube cleaning to remove deposits.
- Stack temperature should be checked and recorded regularly as an indicator of soot deposits. When the flue gas temperature rises about 20°C above the temperature for a newly cleaned boiler, it is time to remove the soot deposits

## 7. Effect of Boiler Loading on Efficiency

- As the load falls, so does the value of the mass flow rate of the flue gases through the tubes. This reduction in flow rate for the same heat transfer area, reduced the exit flue gas temperatures by a small extent, reducing the sensible heat loss.
- Below half load, most combustion appliances need more excess air to burn the fuel completely and increases the sensible heat loss.
- Operation of boiler below 25% should be avoided
- Optimum efficiency occurs at 65-85% of full loads

# Effect of Load on Boiler Efficiency

Fuel	Full Load Efficiency	Low Load Efficiency
Coal	85 %	75 %
Oil	80 %	72 %
Gas	75 %	70 %
Biomass	70 % ( ? )	60 % ( ? )

## 8. BOILER REPLACEMENT

If the existing boiler is :


Old and inefficient, not capable of firing cheaper substitution fuel, over or under-sized for present requirements, not designed for ideal loading conditions replacement option should be explored.

- Since boiler plants traditionally have a useful life of well over 25 years, replacement must be carefully studied.



*THANK YOU*

*for your attention*

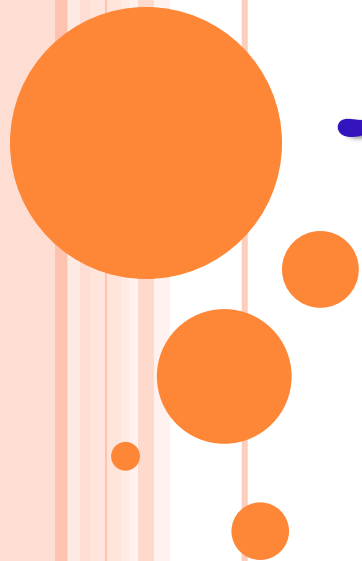

## REFERENCES

1. **A. Thumann and W. J. Younger.** *Handbook of Energi Audits*, 7<sup>th</sup> ed., The Fairmont Press, Inc., Lilburn, USA, 2007.
2. **T. Amstrong et al.** *Energy Audit Manual New Zealand*, Energy Efficiency and Conservation Authority, Wellington, 2007.
3. **S. A. Parker and W. D. Hunt.** Strategic Energi Management Plan for Fort Buchanan, Puerto Rico, U. S. Dept. Of Energy, October 2001.
4. **A. P. Rossiter and B. P. Jones.** *Energy Management and Efficiency for the Process Industries*, American Institute of Chemical Engineers and John Wiley & Sons, Inc. Hoboken, New Jersey, 2015.
5. **Badan Pengkajian Industri Hijau dan Lingkungan Hidup, Kementerian Perindustrian RI.** *Pedoman Teknis Audit Energi dalam Implementasi Konservasi Energi dan Pengurangan Emisi CO<sub>2</sub> di Sektor Industri (Fase 1)*, Jakarta, 2011.
6. **Departemen Penelitian dan Pengaturan Perbankan, Otoritas Jasa Keuangan (OJK).** *Buku Pedoman Pembiayaan Efisiensi Energi di Industri untuk Lembaga Jasa Keuangan*, OJK, Jakarta, 2015.
7. **Awaludin, W. Panuntun, W.S. Alam, N. Sinaga.** *Pemilihan Mesin Penggerak Generator Pada Sistem Pembangkit Listrik Tenaga Biogas (PLTBG)*, Seminar Nasional Teknik Kimia, Jurusan Teknik Kimia FT Undip, 2003.
8. **Sinaga, Nazaruddin, R. Ismail, R. Perangin-angin dan O. A. Wicaksono.** *Pembangkitan Listrik Menggunakan Bahan Bakar Biogas dari Hasil Fermentasi Kotoran Ternak*, Seminar Nasional Teknik Kimia, Jurusan Teknik Kimia FT Undip, 2003.
9. **Sinaga, Nazaruddin, A. Suwono, Sularso, and P. Sutikno.** *Simulation of Fin Arrangement Effect on Performance of Staggered Circular Finned-Tube Heat Exchanger*, Proceeding, International Conference on Fluid and Thermal Energy Conversion, Bali, 2003
10. **Sinaga, Nazaruddin, A. Suwono, Sularso, and P. Sutikno.** *Kaji Numerik dan Eksperimental Pembentukan Horseshoe Vortex pada Pipa Bersirip Anular*, Prosiding, Seminar Nasional Teknik Mesin II, Universitas Andalas, Padang, Desember 2003
11. **Sinaga, Nazaruddin, A. Suwono dan Sularso.** *Pengamatan Visual Pembentukan Horseshoe Vortex pada Susunan Gormetri Pipa Bersirip*

- Anular*, Prosiding, Seminar Nasional Teknik Mesin II, Universitas Andalas, Padang, Desember 2003.
12. **Sinaga, Nazaruddin.** *Perancangan Mixer Biogas-Udara Untuk Mesin Diesel Dual Fuel Pembangkit Listrik Tenaga Biogas*, Majalah Teknik, Tahun ke XXV, Edisi I, 2005.
  13. **Sinaga, Nazaruddin.** *Analisa dan Pemilihan Mesin Untuk Mesin Dual Fuel Campuran Biogas-Solar*, Majalah Rotasi, Jurusan Teknik Mesin FT Undip, Vol. 7 No. 2, April, 2005.
  14. **Sinaga, Nazaruddin.** *Perancangan Conversion Kit Untuk Modifikasi Mesin Diesel Dual Fuel Pembangkit Listrik Tenaga Biogas*, Jurnal Ilmiah Nasional Efisiensi dan Konservasi Energi, Jurusan Teknik Mesin, FT Undip, Vol. 1 No. 1, September, 2005.
  15. **Sinaga, Nazaruddin.** *Peluang dan Strategi Penghematan Energi Sektor Transportasi di Indonesia*, Prosiding, Seminar Nasional Efisiensi dan Konservasi Energi (FISERGI) 2005, Jurusan Teknik Mesin FT Undip, ISSN 1907-0063, Desember, 2005.
  16. **Sinaga, Nazaruddin.** *Pengaruh Parameter Geometri dan Konfigurasi Berkas Pipa Bersirip Anular Terhadap Posisi Separasi di Permukaan Sirip*, Jurnal Ilmiah Poros, Jurusan Teknik Mesin FT Universitas Tarumanegara, Vol. 9 No. 1, Januari, 2006.
  17. **Sinaga, Nazaruddin.** *Energy Efficiency As Research and Business Opportunity*, Proceeding, International Workshop on Improvement of UNDIP Research Ability and Networking to Stimulate Sustainable Energy, Grand Candi Hotel, Semarang, October 2009.
  18. **Cahyono, Sukmaji Indro, Gwang-Hwan Choe, and Nazaruddin Sinaga.** *Numerical Analysis Dynamometer (Water Brake) Using Computational Fluid Dynamic Software*. Proceedings of the Korean Solar Energy Society Conference, 2009.
  19. **Sinaga, Nazaruddin.** *Energy Efficiency On Boiler And Pump Systems*, Technical Papers, International Workshop on Energy Audit Diponegoro University, Casindo Project, Semarang, August 2010 .
  20. **Sinaga, Nazaruddin.** *Pengaruh Model Turbulensi Dan Pressure-Velocity Copling Terhadap Hasil Simulasi Aliran Melalui Katup Isap Ruang Bakar Motor Bakar*, Jurnal Rotasi, Volume 12, Nomor 2, ISSN:1411-027X, April 2010.
  21. **I. N. Widiassa, N. Sinaga dan D. Ariyanti.** *Improving Performance Of Low Pressure Reverse Osmosis Systems By Intermittent Autoflushing*, Jurnal Teknik Kimia Indonesia Vol. 9 No. 1, April 2010.

22. **Priangkoso, Tabah dan N. Sinaga.** *Tinjauan Beberapa Model Mekanistik Tingkat Konsumsi Bahan Bakar Untuk Diterapkan Pada Program Simulator Mengemudi Hemat Energi Smart Driving*, Prosiding, Seminar Nasional Sains dan Teknologi ke-2, Fakultas Teknik Universitas Wahid Hasyim Semarang, Juni 2011.
23. **Mrihardjono, Juli dan N. Sinaga.** *Pengujian Model Driving Cycle Kendaraan Honda City Berbahan Bakar Premium*, Majalah Gema Teknologi, Volume 16, Nomor 3, April - Oktober 2011, ISSN : 0852 0232.
24. **Sinaga, Nazaruddin dan Tabah Priangkoso.** *Tinjauan/Review Model Empirik Konsumsi Bahan Bakar Kendaraan*, Journal Momentum, Vol. 7, No. 1, April 2011.
25. **Supriyo dan N. Sinaga.** *Perencanaan Daya Pendingin pada Dinamometer Arus Eddy*, Eksergi, Jurnal Teknik Energi POLINES, Volume 7, Nomor 3, ISSN : 0216-8685, September 2011.
26. **Supriyo dan N. Sinaga.** *Perancangan Dinamometer Arus Eddy Kapasitas 250 KW*, Majalah Eksergi, Volume 7, Nomor 3, ISSN : 0216-8685, September 2011.
27. **Sinaga, Nazaruddin.** *Pengujian Teknik Mengemudi Hemat Energi pada Kendaraan Penumpang untuk Mendukung Program Smart Driving di Indonesia*, Prosiding, Seminar Nasional Teknik Mesin X (SNTTM X), Jurusan Teknik Mesin, Fakultas Teknik Universitas Brawijaya, Malang, November 2011.
28. **Yunianto, Bambang dan N. Sinaga.** *Peningkatan Efisiensi Pembakaran Tungku Kayu Bakar Tradisional Dengan Modifikasi Disain*, Prosiding, Seminar Nasional Teknik Mesin X (SNTTM X), Jurusan Teknik Mesin, Fakultas Teknik Universitas Brawijaya, Malang, November 2011.
29. **Sinaga, Nazaruddin, T. Priangkoso, D. Widayana dan K. Abdurrohman.** *Kaji Eksperimental Pengaruh Beberapa Parameter Berkendaraan Terhadap Tingkat Konsumsi Bahan Bakar Kendaraan Penumpang Kapasitas Silinder 1500-2000cc*, Prosiding, Seminar Nasional Teknik Mesin X (SNTTM X), Jurusan Teknik Mesin, Fakultas Teknik Universitas Brawijaya, Malang, November 2011.
30. **Sinaga, Nazaruddin dan B. Prasetyo.** *Kaji Eksperimental Karakteristik Sebuah Dinamometer Sasis Arus Eddy*, Eksergi, Jurnal Teknik Energi POLINES, Volume 8, Nomor 2, Mei 2012, ISSN : 0216-8685.

31. **Sinaga, Nazaruddin dan A. Dewangga.** *Pengujian Dan Pembuatan Buku Petunjuk Operasi Chassis Dinamometer Tipe Water Brake*, Majalah Rotasi, Volume 14, Nomor 3, Juli 2012, ISSN:1411-027X.
32. **Sinaga, Nazaruddin.** *Smart Driving : Menghemat Bahan Bakar, Meningkatkan Kualitas Emisi Dan Menurunkan Resiko Kecelakaan*, Makalah, Seminar Astra – Jurusan Teknik Mesin Undip, Jurusan Teknik Mesin FT UNDIP, November 2012.
33. **Sinaga, Nazaruddin dan Mulyono.** *Kaji Eksperimental Dampak Pemakaian Pertamina Dan Pertamina-Plus Terhadap Emisi Gas Buang Pada Sepeda Motor*, Prosiding, Seminar Nasional Unit Penelitian dan Pengabdian Kepada Masyarakat Politeknik Negeri Semarang 2013, ISBN : 978-979-3514-66-6, Halaman 168-172.
34. **Sinaga, Nazaruddin, dan M. H. Sonda.** *Pemilihan Kawat Enamel Untuk Pembuatan Selenoid Dinamometer Arus Eddy Dengan Torsi Maksimum 496 Nm*, Eksergi, Jurnal Teknik Energi Vol 9 No.1 Januari 2013.
35. **Sinaga, Nazaruddin dan S. J. Purnomo.** *Hubungan Antara Posisi Throttle, Putaran Mesin dan Posisi Gigi Terhadap Konsumsi Bahan Bakar pada Beberapa Kendaraan Penumpang*, Eksergi, Jurnal Teknik Energi, Vol.9 No. 1, Januari 2013.
36. **Sinaga, Nazaruddin.** *Pelatihan Teknik Mengemudi Smart Driving Untuk Menurunkan Emisi Gas Rumah Kaca Dan Menekan Biaya Transportasi Angkutan Darat*, Prosiding, Seminar Nasional Teknik Mesin XII (SNTTM XII), Fakultas Teknik Universitas Lampung, Oktober 2013.
37. **Sinaga, Nazaruddin, S. J. Purnomo dan A. Dewangga.** *Pengembangan Model Persamaan Konsumsi Bahan Bakar Efisien Untuk Mobil Penumpang Berbahan Bakar Bensin Sistem Injeksi Elektronik (EFI)*, Prosiding, Seminar Nasional Teknik Mesin XII (SNTTM XII), Fakultas Teknik Universitas Lampung, Oktober 2013.
38. **Yunianto, Bambang dan N. Sinaga.** *Pengembangan Disain Tungku Bahan Bakar Kayu Rendah Polusi Dengan Menggunakan Dinding Beton Semen*, Majalah Rotasi, Volume 16, Nomor 1, Januari 2014, ISSN:1411-027X.
39. **Sinaga, Nazaruddin dan Y.N. Rohmat.** *Perbandingan Kinerja Sepeda Motor Berbahan Bakar Lpg Dan Bensin*, Prosiding, Seminar Nasional Teknologi Industri Hijau, Semarang 21 Mei 2014, Balai Besar Teknologi Pencegahan Pencemaran Industri (BBTPPI) Semarang, BPKIMI, Kementrian Perindustrian, Mei 2014.

40. **Syachrullah, L.I, dan N. Sinaga.** *Optimization and Prediction of Motorcycle Injection System Performance with Feed-Forward Back-Propagation Method Artificial Neural Network (ANN)*, Prosiding, Seminar Nasional Perkembangan Riset dan Teknologi di Bidang Industri ke-2, Fakultas Teknik Universitas Gajah Mada Yogyakarta, Juni 2014.
41. **Paridawati dan N. Sinaga.** *Penurunan Konsumsi Bahan Bakar Sepeda Motor Sistem Injeksi Menggunakan Metode Optimasi Artificial Neural Network Dengan Algoritma Back-Propagation*, Prosiding, Seminar Nasional Perkembangan Riset dan Teknologi di Bidang Industri ke-2, Fakultas Teknik Universitas Gajah Mada Yogyakarta, Juni 2014.
42. **Nazaruddin Sinaga, Abdul Zahri.** *Simulasi Numerik Perhitungan Tegangan Geser Dan Momen Pada Fuel Flowmeter Jenis Positive Displacement Dengan Variasi Debit Aliran Pada Berbagai Sudut Putar Rotor*, Jurnal Teknik Mesin S-1, Vol. 2, No. 4, Tahun 2014.
43. **Haryanto, Ismoyo, MSKTS Utomo, N. Sinaga, C. A. Rosalia dan A. P. Putra.** *Optimization Of Maximum Lift To Drag Ratio On Airfoil Design Based On Artificial Neural Network Utilizing Genetic Algorithm*, International Journal on Applied Mechanics and Materials Vol. 493, pp 123-128, 2014.
44. **M. Rifal dan N. Sinaga.** *Impact of Methanol-Gasoline Fuel Blend on The Fuel Consumption and Exhaust Emission of an SI Engine*, Proceeding, The 3<sup>rd</sup> International Conference on Advanced Materials Science and Technology (ICAMST 2015), Universitas Negeri Semarang, April 2015.
45. **Sinaga, Nazaruddin dan Mulyono.** *Studi Eksperimental Karakteristik Kinerja Sepeda Motor Dengan Variasi Jenis Bahan Bakar Bensin*, Majalah Eksergi, Volume 11, Nomor 1, ISSN:0216-8685, Halaman 1-6 Januari 2015.
46. **Septianto, Fajar, A. Widodo dan N. Sinaga.** *Analisa Penurunan Efisiensi Motor Induksi Akibat Cacat Pada Cage Ball Bantalan*, Jurnal Teknik Mesin S-1, Vol. 4, No. 4, Tahun 2015.
47. **Syahrullah, L. I. dan N. Sinaga.** *Optimization and Prediction of Motorcycle Injection System Performance with Feed-Forward Back-Propagation Method Artificial Neural Network (ANN)*, American Journal of Engineering and Applied Sciences, Volume 9, Issue 2, ISSN: 1941-7039, Halaman 222-235, Februari 2016.
48. **Rojak, Amirur dan N. Sinaga.** *Pengaruh Penggunaan Bahan Bakar LGV Pada Mobil Penumpang 1200 CC Dan 1500 CC Terhadap Kebutuhan Udara Dan Bahan Bakar*, Politeknosains, Volume XV, Nomor 1, ISSN: 1829-6181, Maret 2016.

49. **Fajrin, D. H. dan N. Sinaga.** *Efek Variasi Kandungan Air Terhadap Kerja Gas Engine Cooler Suatu PLTB Limbah Organik Pasar Induk*, Politeknosains, Volume XV, Nomor 1, ISSN: 1829-6181, Maret 2016.
50. **Khudhoibi dan N. Sinaga.** *Pengaruh Engine Remap Terhadap Beberapa Parameter Operasi Mobil Berbahan Bakar LGV*, Jurnal Ilmiah Momentum, Volume 12, Nomor 1, ISSN : 0216-7395, April 2016.
51. **Rifal, Mohamad dan N. Sinaga.** *Impact of Methanol-Gasoline Fuel Blend on The Fuel Consumption and Exhaust Emission of an SI Engine*, AIP Conf. Proc. 1725, 020070-1–020070-6; Published by AIP Publishing, 978-0-7354-1372-6, Maret 2016.
52. **Sinaga, Nazaruddin dan A. S. B. Nasution.** *Simulasi Pengaruh Komposisi Limbah Cair Pabrik Kelapa Sawit (Pome) Terhadap Kandungan Air Biogas dan Daya Listrik yang Dihasilkan Sebuah Pembangkit Listrik Tenaga Biogas*, Eksergi, Jurnal Teknik Energi POLINES, Vol. 12 No. 3, September 2016.
53. **Sinaga, Nazaruddin dan D. Alcita.** *Perbandingan Beberapa Parameter Operasi Mesin Mobil Injeksi Terhadap Penggunaan Bahan Bakar Bensin dan Campuran Metanol-Bensin M15*, Eksergi, Jurnal Teknik Energi POLINES, Vol. 12 No. 3, September 2016.
54. **Fatichuddin, Mochamad dan N. Sinaga.** *Pengaruh Komposisi Air Terhadap Kebutuhan Daya Kompresor Pada Sistem Pembangkit Listrik Biogas Dari Limbah Tandan Kosong Kelapa Sawit*, Jurnal Ilmiah Momentum, Vol. 12 No. 2, Oktober 2016.
55. **Nazaruddin Sinaga.** *Perancangan Awal Converter Kit LPG Sederhana untuk Konversi Mesin Bensin Skala Kecil*, Eksergi, Jurnal Teknik Energi POLINES, Vol. 13, No. 1, Januari 2017.
56. **Nazaruddin Sinaga.** *Kaji Numerik Aliran Jet-Swirling Pada Saluran Annulus Menggunakan Metode Volume Hingga*, Jurnal Rotasi Vol. 19, No. 2, April 2017.
57. **Nazaruddin Sinaga dan M. Rifal.** *Pengaruh Komposisi Bahan Bakar Metanol-Bensin Terhadap Torsi Dan Daya Sebuah Mobil Penumpang Sistem Injeksi Elektronik 1200 CC*, Jurnal Rotasi Vol. 19, No. 3, Juli 2017.
58. **Nazaruddin Sinaga.** *Analisis Aliran Pada Rotor Turbin Angin Sumbu Horisontal Menggunakan Pendekatan Komputasional*, Eksergi, Jurnal Teknik Energi POLINES, Vol. 13, No. 3, September 2017.

59. **Nazaruddin Sinaga.** *Perancangan dan Pembuatan Data Logger Sederhana untuk Dinamometer Sasis Sepeda Motor*, Jurnal Rotasi, Vol. 20, No. 1, Januari 2018.
60. **Mohamad Rifal dan Nazarudin Sinaga.** *Kaji Eksperimental Rasio Metanol-Bensin Terhadap Konsumsi Bahan Bakar, Emisi Gas Buang, Torsi Dan Daya*, Gorontalo Journal of Infrastructure and Science Engineering, Vol 1 (1), April 2018, pp. 47-54.
61. **Nazaruddin Sinaga, Maizirwan Mel, Rezeki Pakpahan, Nor Azwadi Che Sidik.** *Influence of Volatile Fatty Acid Concentration on Biogas Production in Synthropic Anaerobic Digestion*, Journal of Advanced Research in Biofuel and Bioenergy, Vol. 1 No. 1, June 2018
62. **Sinaga, N., Nasution, S.B., Mel, M.** *Process Optimization of Biogas Production From Palm Oil Mill Effluent: A Case Study of a Crude Palm Oil Factory in Muaro Jambi, Indonesia*, Journal of Advanced Research in Fluid Mechanics and Thermal Sciences, Vol. 49, Issue 2, pp. 155-169 , September 2018, ISSN: 2289-7879
63. **Nurjehan Ezzatul Ahmad, Maizirwan Mel, Nazaruddin Sinaga.** *Design of Liquefaction Process of Biogas Using Aspen HYSYS Simulation*, pp. 10-15, Journal of Advanced Research in Biofuel and Bioenergy, Vol. 2 No.1, September 2018.
64. **Nugroho, A., Sinaga, N., Haryanto, I.** *Performance of a Compression Ignition Engine Four Strokes Four Cylinders on Dual Fuel (Diesel-LPG)*, Proceeding, The 17th International Conference on Ion Sources, Vol. 2014, 2018, 21 September 2018, AIP Publishing.
65. **Nazaruddin Sinaga, P. Paryanto, Susilo A. Widyanto, R. Rusnaldy, Alexander Hetzner, and Jorg Franke.** *An Analysis of the Effect of Gravitational Load on the Energy Consumption of Industrial Robots*, 6th CIRP Global Web Conference, Procedia CIRP 78 (2018), pp. 8 – 12, September 2018.
66. **Syaiful, Sinaga, N., Wulandari, R., Bae, M.W.** *Effect of Perforated Concave Delta Winglet Vortex Generators on Heat Transfer Augmentation of Fluid Flow Inside a Rectangular Channel: An Experimental Study*. International Mechanical and Industrial Engineering Conference 2018 (IMIEC 2018), MATEC Web of Conferences Vol.204 , 2018 , 21-Sep-18 , EDP Sciences 12 , ISSN: 2261-236X
67. **Muchammad, M., Sinaga, N., Yunianto, B., Noorkarim, M.F., Tauviqirrahman, M.** *Optimization of Texture of The Multiple Textured Lubricated Contact with Slip*, International Conference on Computation in Science and Engineering, Journal of Physics: Conf. Series 1090-

012022, 5 November 2018, IOP Publishing, Online ISSN: 1742-6596  
Print ISSN: 1742-6588.

68. **Nazaruddin Sinaga, B. Yunianto, Syaiful, W.H. Mitra Kusuma.** *Effect of Addition of 1,2 Propylene Glycol Composition on Power and Torque of an EFI Passenger Car Fueled with Methanol-Gasoline M15*, Proceeding of International Conference on Advance of Mechanical Engineering Research and Application (ICOMERA 2018), Malang, October 2018.
69. **Nazaruddin Sinaga, Mohammad Tauiviqirrahman, Arif Rahman Hakim, E. Yohana.** *Effect of Texture Depth on the Hydrodynamic Performance of Lubricated Contact Considering Cavitation*, Proceeding of International Conference on Advance of Mechanical Engineering Research and Application (ICOMERA 2018), Malang, October 2018.
70. **Syaiful, N. Sinaga, B. Yunianto, M.S.K.T. Suryo.** *Comparison of Thermal-Hydraulic Performances of Perforated Concave Delta Winglet Vortex Generators Mounted on Heated Plate: Experimental Study and Flow Visualization*, Proceeding of International Conference on Advance of Mechanical Engineering Research and Application (ICOMERA 2018), Malang, October 2018.
71. **Nazaruddin Sinaga, K. Hatta, N. E. Ahmad, M. Mel.** *Effect of Rushton Impeller Speed on Biogas Production in Anaerobic Digestion of Continuous Stirred Bioreactor*, Journal of Advanced Research in Biofuel and Bioenergy, Vol. 3 (1), December 2019, pp. 9-18.
72. **Nazaruddin Sinaga, Syaiful, B. Yunianto, M. Rifal.** *Experimental and Computational Study on Heat Transfer of a 150 KW Air Cooled Eddy Current Dynamometer*, Proc. The 2019 Conference on Fundamental and Applied Science for Advanced Technology (Confast 2019), Yogyakarta, Januari 21, 2019.
73. **Nazaruddin Sinaga.** *CFD Simulation of the Width and Angle of the Rotor Blade on the Air Flow Rate of a 350 kW Air-Cooled Eddy Current Dynamometer*, Proc. The 2019 Conference on Fundamental and Applied Science for Advanced Technology (Confast 2019), Yogyakarta, Januari 21, 2019.
74. **Ahmad Faoji, Syaiful Laila, Nazaruddin Sinaga.** *Consumption and Smoke Emission of Direct Injection Diesel Engine Fueled by Diesel and Jatropha Oil Blends with Cold EGR System*, Proc. The 2019 Conference on Fundamental and Applied Science for Advanced Technology (Confast 2019), Yogyakarta, Januari 21, 2019.
75. **Johan Firmansyah, Syaiful Laila, Nazaruddin Sinaga.** *Effect of Water Content in Methanol on the Performance and Smoke Emissions*

- of Direct Injection Diesel Engines Fueled by Diesel Fuel and Jatropha Oil Blends with EGR System*, Proc. The 2019 Conference on Fundamental and Applied Science for Advanced Technology (Confast 2019), Yogyakarta, Januari 21, 2019.
76. **Syaiful, Anggie Restue, Saputra, Nazaruddin Sinaga.** *2-D Modeling of Interaction between Free-Stream Turbulence and Trailing Edge Vortex*, Proc. The 2019 Conference on Fundamental and Applied Science for Advanced Technology (Confast 2019), Yogyakarta, Januari 21, 2019.
  77. **Anggie Restue, Saputra, Syaiful, and Nazaruddin Sinaga.** *2-D Modeling of Interaction between Free-Stream Turbulence and Trailing Edge Vortex*, Proc. The 2019 Conference on Fundamental and Applied Science for Advanced Technology (Confast 2019), Yogyakarta, January 21, 2019.
  78. **Sinaga, Nazaruddin, M. Mel, D.A Purba, Syaiful, and Paridawati.** *Comparative Study of the Performance and Economic Value of a Small Engine Fueled with B20 and B20-LPG as an Effort to Reduce the Operating Cost of Diesel Engines in Remote Areas*, Joint Conference of 6th Annual Conference on Industrial and System Engineering (6th International Conference of Risk Management as an Interdisciplinary Approach (1<sup>st</sup> ICRMIA) 2019 on April 23-24, 2019 in Semarang, Central Java, Indonesia.
  79. **Sinaga, Nazaruddin, B. Yuniyanto, D.A Purba, Syaiful and A. Nugroho.** *Design and Manufacture of a Low-Cost Data Acquisition Based Measurement System for Dual Fuel Engine Researches*, Joint Conference of 6th Annual Conference on Industrial and System Engineering (6th International Conference of Risk Management as an Interdisciplinary Approach (1<sup>st</sup> ICRMIA) 2019 on April 23-24, 2019 in Semarang, Central Java, Indonesia.
  80. **Y Prayogi, Syaiful, and N Sinaga.** *Performance and Exhaust Gas Emission of Gasoline Engine Fueled by Gasoline, Acetone and Wet Methanol Blends*, International Conference on Technology and Vocational Teacher (ICTVT-2018), IOP Conf. Series: Materials Science and Engineering 535 (2019) 012013 doi:10.1088/1757-899X/535/1/012013.
  81. **E. Yohana, B. Farizki, N. Sinaga, M. E. Julianto, I. Hartati.** *Analisis Pengaruh Temperatur dan Laju Aliran Massa Cooling Water Terhadap Efektivitas Kondensor di PT. Geo Dipa Energi Unit Dieng*, Journal of Rotasi, Vol. 21 No. 3, 155-159.

82. **B. Yuniato, F. B. Hasugia, B. F. T. Kiono, N. Sinaga.** *Performance Test of Indirect Evaporative Cooler by Primary Air Flow Rate Variations*, Prosiding SNTTM XVIII, 9-10 Oktober 2019, 1-7.