

# Effect of Wavelet-transformed Iris Image Translation and Rotation on it

*by* Rizal Isnanto

---

FILE	SUBMISSION_R_RIZAL_ISNANTO.PDF (271.38K)		
TIME SUBMITTED	10-FEB-2017 08:02AM	WORD COUNT	2527
SUBMISSION ID	768971013	CHARACTER COUNT	13911

# Effect of Wavelet-transformed Iris Image Translation and Rotation on its Recognition Rate

An Experimental Approach using Haar Wavelet

R. Rizal Isnanto

Master of Information System Program and Computer Engineering Department  
Diponegoro University  
Semarang, Indonesia  
e-mail: rizal\_isnanto@yahoo.com

**Abstract**— Iris can be used as a basic of biometrics system. Iris texture is unique for any person, it has a stable pattern of texture for along one's life, even for right or left-side of irises are different for everyone. Analysis for identification is based on this texture feature. Research objectives is to measure the effect of Wavelet-transformed iris image translation and rotation on its recognition rate. Circular Hough Transform is quite good in determining objects and to separate the circular iris from pupil and sclera, thus determining the object can be conducted accurately even though the translation process is carried out varying the input image. Iris characteristics generally have a uniform texture, so the recognition can be partially done with the proper results. Therefore, the image that is rotated with angle variations from 0° up to 359° can also still be recognized correctly.

**Keywords** – wavelets; translation; rotation; recognition rate; orthogonal; biorthogonal.

## I. INTRODUCTION

Iris can be used as a basic of biometrics system. Iris texture is unique for any person, it has a stable pattern of texture for along one's life, even for right or left-side of irises are different for everyone. Analysis for identification is based on this texture feature [30]. Several types of abnormalities in the iris can cause the iris pattern changed from the normal state, namely: inflammation, degeneration, abnormal growth, and tumor. Figure 1 shows the view of human eyes which iris included there.



Figure 1. View of human eyes (courtesy of [www.gcot.net](http://www.gcot.net))

Topics detailed in this research is the design of software systems based on extracting features of the iris texture. In

this case there are several possible conditions when the iris data are acquired, those are: brightness and contrast of images, the presence of noise factors are caused by reflections, eyelashes, eyebrows, obstruction of the iris as it is covered in part by the petals, and so forth.

Having learned that the iris can be used as an organ of the biometric system with much greater accuracy, the feature extraction and iris recognition become more attractive. There are several advantages of digital image processing, in this case is its ability to distinguish which is almost the same intensity that the human eye cannot distinguish them.

*The first problem* is how to extract the iris feature. Here will be the process of feature extraction using Haar wavelet transform method and its recognition uses Euclidean distance (Euclidean Distance). Programming language used in this research is Matlab version 7.6.0 (R2008a).

*The second issue* is the subject of research itself, that is the iris. In iris data acquisition, there are some possibilities of imperfect iris captured because of translational as well as rotational effect due to digital camera movement or unstable eyes condition captured. Iris images used in this research are taken from The Chinese Academy of Sciences Institute of Automation (CASIA).

Therefore, in this research, an experimental approach has been done to measure the effect of wavelet-transformed iris image translation and rotation on its Recognition Rate.

## II. RELATED WORKS

Before this research done, there are some research which also had been published before regarding to algorithm for iris identification and/or iris recognition.

Iris recognition using Independent Component Analysis (ICA) algorithm shows that the correct recognition rate (CRR) is 97,5 % which achieved in recognition using 6 (six) training images without any threshold and using all independent components [4].

While implementation of Principal Component Analysis (PCA) algorithm indicates that the correct recognition rate is 97,5% which achieved in recognition using 6 (six) training images [5].

For iris identification using Fourier Descriptors, it can be shown that the average classification accuracy achieved was 96.66%. It also shows that 40% of these cases exhibited a 100% accuracy. When noise was added to the images used for testing at an SNR of 10 db, the average accuracy dropped to 90.06%, then to 86% at 2db SNR. It is noticed that for some irises that were heavily distorted, such as part of the iris being covered, the classifier was giving unsatisfactory results. Fortunately, there were only few cases that fell under this category. [6]. In improved identification of iris and eyelash features, from the testing, it is shown that the identification rate is 95.25% [7].

In extraction of complex wavelet features for iris recognition complex wavelet, especially in identification mode, the CRR of the proposed algorithm was 99.83% and 98.15% on DB1 and DB2 respectively, whereas are 99.67% and 97.22% using the traditional Gabor filters method [8]. Otherwise, implementation of Haar wavelet, observing on 60 pictures, using a Pentium IV processor, and it resulted in an average of correct recognition of 93%, with an average computing time of 31s.[9]. Meanwhile, when using lifting wavelet, the algorithm was tested on 750 images using 6<sup>th</sup> level coarse components, and an average correct recognition rate of 99.78%, 98.91% and 98.56% for Euclidean Distance Measure 1, 2 and Distance Threshold [10].

Meanwhile, in iris identification system using tree-structured wavelet algorithm, the experiment shows that 7 analyzed channels give the optimal result, with precision level 94.7% [12].

In research of automatic iris recognition technique based on divider dimension and Karhunen-Loeve Transform, it can be concluded that the best identification accuracy of the divider dimension-based and KLT-based methods have False Acceptance Rate (FAR) of 3.67% and 0%, respectively [11]. It means that correct recognition rates are 96.33% and 100%, respectively.

In research of efficient iris recognition through improvement of feature extraction and subset selection, the highest acceptable classification accuracy percentage is arrived using Genetic Algorithm (GA) with Support Vector Machine (SVM) classifier, i.e. 97.81% [13].

From research on comparison analysis on recognition rate of iris [2], it can be concluded that The best recognition rate for the Haar wavelet is 84.375% which is occurred in the application of decomposition level 3. Meanwhile, the use of stored samples of the two images produces a greater level of recognition that is equal to 85.58% compared with the use of only one stored image which has a recognition rate of 81.20%. From these reasons, a research to find optimum decomposition level and number of data-stored is required to be done.

### III. PROPOSED METHODOLOGY

Texture is an intuitively concept which describes about smoothness, coarseness, and regularity in a region ([1],[3]). In this research, there are two important processes. First, the

feature extraction using Haar wavelet transform yields the energy measurement. The second process is the recognition stage using Euclidean Distance as a similarity measurement.

#### A. Energy Measurement in Wavelet

Energy measurement is used to calculate energies which are resulted of images as output of wavelet transform. These energies are input coefficients for Euclidean distance calculation.

In this research, energy can divided into 4 (four) features, those are:

- 1) Percentage of energy which is related to approximation value,  $E_a$  calculated based on percentage of sum-square of approximation coefficient values  $C_a$  which is divided by sum of all coefficients  $C$  (approximation coefficient plus detail coefficients).

$$E_a = \frac{\sum C_a^2}{\sum C^2} \times 100\% \quad (1)$$

- 2) Percentage of energy which is related to detail values in horizontal direction,  $E_h$  calculated based on percentage of sum-square of detail coefficient values in horizontal direction  $C_h$  which is divided by sum of all coefficients  $C$ .

$$E_h = \frac{\sum C_h^2}{\sum C^2} \times 100\% \quad (2)$$

- 3) Percentage of energy which is related to detail values in vertical direction,  $E_v$  calculated based on percentage of sum-square of detail coefficient values in vertical direction  $C_v$  which is divided by sum of all coefficients  $C$ .

$$E_v = \frac{\sum C_v^2}{\sum C^2} \times 100\% \quad (3)$$

- 4) Percentage of energy which is related to detail values in diagonal direction,  $E_d$  calculated based on percentage of sum-square of detail coefficient values in diagonal direction  $C_d$  which is divided by sum of all coefficients  $C$ .

$$E_d = \frac{\sum C_d^2}{\sum C^2} \times 100\% \quad (4)$$

#### B. Normalized Euclidean Distance

After passing through the process of feature extraction and the specific parameter values have been produced, then calculation of proximate distance (Euclidean distance) for image feature vectors [14]. The value of Euclidean distance which has a zero value, will indicates certain image. The value of input image feature vector which has similar value of specific image feature vector will have Euclidean

distance of zero-approximated. For example, the value of input image feature vector  $A_i = (A_1, A_2, \dots, A_n)$  and  $j$ -th value of image feature vector is  $B_j = (B_{1j}, B_{2j}, \dots, B_{nj})$ , then Euclidean distance between the value of image feature vector and  $j$ -th value of image feature vector can be determined as:

$$D(A, B) = \sqrt{\sum_{i=0}^n \frac{(A_i - B_i)^2}{A_i}} \quad (5)$$

where:

$D(A, B)$  = Euclidean distance between iris  $A$  and  $B$

$A_i$  = Feature vector of iris  $A$

$B_i$  = Feature vector of iris  $B$

Flow diagram for iris recognition can be shown in Figure 4.

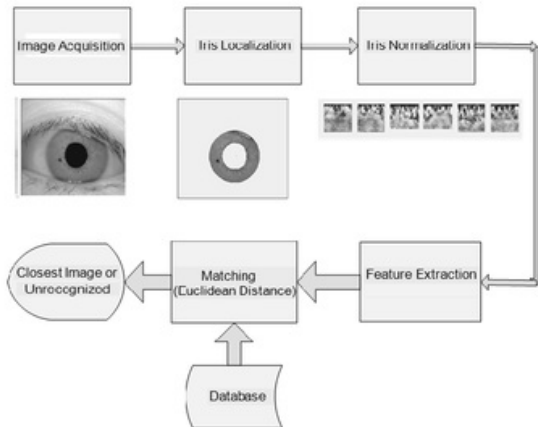


Figure 2. Flow diagram for iris recognition system using feature (i.e. wavelet) extraction method

#### IV. RESULTS AND DISCUSSION

##### A. Effect of Iris Image Translation on its Recognition Rate

Recognition requires the invariance on both translation and rotation. Iris image as the input is recognized as a circular object. To recognize objects such as circles, the Circular Hough Transform is used. In this section, the input of one individual is tested with a variety on shift (translation) during image capture. Figure 3 shows an image in database, while Figure 4 (a-f) are translated images varied on the individual's iris taken at 6 (six) at different times. Testing is done by looking at the recognition of five test images. If the result shows that recognition refers to the training image according to Figure 3, it can be said that the recognition is invariant in translational aspect of input images.




Figure 3. Training image for translation test (077\_2\_1.bmp).

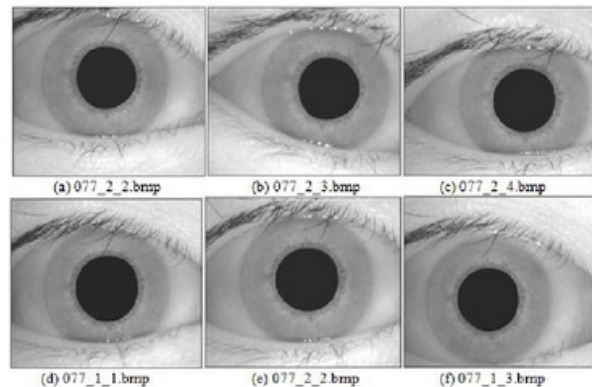


Figure 4. Image for translation-testing.

Test results on the six images in variation of decomposition level 1 to 3 by the number of trained image stored in database is 1, shows that all recognition result is 'Correct'. Based on the test sample and the previous recognition test which showed the diversity of the iris position (which means also the translational parameters are varied), it can be concluded that feature extraction with the Circular Hough Transform is able to overcome the problem of diversity on the translation of the iris input.

##### B. Effect of Iris Image Rotation on its Recognition Rate

In addition to testing of the aspect of translation diversity, it is also conducted a test of aspect of rotational diversity, with a variation of angle between  $0^\circ$  up to  $360^\circ$ . Image sample tested is **077\_2\_1.bmp** eye image. Figure 5 shows examples of various angles of rotation for the image.

Tests performed on the database 5, the decomposition level 3, using wavelet transform Haar. Test results on 20 variations of angles in range of  $0^\circ$ - $359^\circ$ , the system can still recognize the 'correct' iris. This shows that Haar wavelet transform can recognize the input iris which is rotation-independence. This fact also reinforces the conclusion of [15] that iris recognition can be done partially from a certain area of the iris. Iris feature extraction can be done from any angle of rotation, and this suggests that the texture of the iris for a single individual is uniform in all parts of the iris.

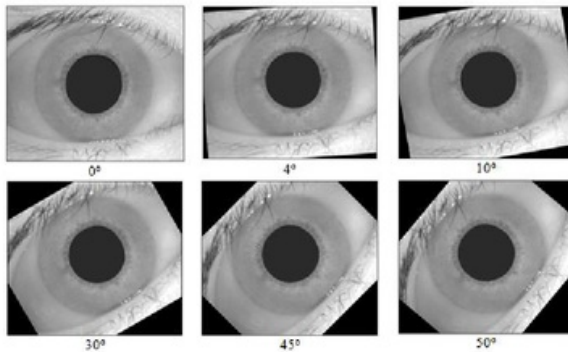


Figure 5. Samples of images for rotational-testing

## V. CONCLUSIONS

From Results and Discussion, it can be concluded some important points as follows. *Firstly*, Circular Hough Transform is quite good in determining objects and to separate the circular iris from pupil and sclera, thus determining the object can be conducted accurately even though the translation process is carried out varying the input image. *Secondly*, wavelet transform, i.e. Haar is robust-proofed to translation invariant for extracting the iris image. *Thirdly*, iris characteristics generally have a uniform texture, so the recognition can be partially done with the proper results. Therefore, the image that is rotated with angle variations from  $0^\circ$  up to  $359^\circ$  can also still be recognized correctly. This infers that Haar wavelet is, again, robust-proofed to rotation invariant for extracting the iris image.

## ACKNOWLEDGMENT

Author wishes to acknowledge assistance or encouragement from colleagues, they are: Mr. Rukun Santoso and Mr. Achmad Hidayatno who had gives some interesting views for insight understanding into wavelets. Also, author has to thank to BOPTN Undip for their financial support for which this research can be done.

## REFERENCES

- [1] R. Munir, *Pengolahan Citra Digital dengan Pendekatan Algoritmik*, Informatika, Bandung, 2004.
- [2] J. Daugman, "High Confidence Visual Recognition of Persons by a Test of Statistical Independence", *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 15, No.11, pp. 1148-1161, 1993.
- [3] --, *Modul 3 – Analisis Tekstur Imaging & Image Processing Research Group*. Institut Teknologi Bandung, Februari, 2009.
- [4] H. Casbari, R.R Isnanto, dan I. Santoso, "Identifikasi Iris Mata Menggunakan Metode Analisis Komponen Bebas (Independent Component Analysis – ICA)", Skripsi S-1, Universitas Diponegoro, 2008.
- [5] M. Jatra, R.R Isnanto, dan I. Santoso, "Identifikasi Iris Mata Menggunakan Metode Analisis Komponen Utama dan Perhitungan Jarak Euclidean", Skripsi S-1, Universitas Diponegoro, 2007.
- [6] M. Deriche, M. Mohandes, and J. Bakhshwan, *An Algorithm for Iris Identification using Fourier Descriptors*, Department of Electrical Engineering – King Fahd University of Petroleum and Minerals, 10th IEEE Technical Exchange Meeting (TEM), 2003.
- [7] R. Youmaran, L.P. Xie, and A. Adler, "Improved Identification of Iris and Eyelash Features", 24<sup>th</sup> IEEE Biennial Symposium on Communication, 2008.
- [8] X. He and P. Shi, "Extraction of Complex Wavelet Features for Iris Recognition", International Conference on Pattern Recognition, ISBN 978-1-4244-2175-6/08, 2008.
- [9] C. H. Daouk, L. A. El-Esber, F. D. Kammoun and M. A. Al Alaoui, "Iris Recognition", IEEE ISSPIT 2002, Marrakesh - pp 558, 2002.
- [10] C.M. Patil and S. Patilkulkarani, "Iris Feature Extraction for Personal Identification using Lifting Wavelet Transform", International Conference on Advance in Computing, Control, and Telecommunication Technologies, 2009.
- [11] W.S. Chen, S.W. Shih, Y.L. Lin, and J.C. Lio, "Automatic Iris Recognition Technique based on Divider Dimension and Karhunen-Loeve Transform", VIP-CCLab., Dept. of Electrical Engineering, National Chi Nan University, 2002.
- [12] T.R Mengko, A. Ardianti, and A. Setyorini, "Iris Identification System Using Tree-Structured Wavelet Algorithm", IAPR Workshop on Machine Vision Applications, Nov. 28-30, 2000, The University of Tokyo, Japan, 2000.
- [13] A. Azizi and H.R. Pourreza, "Efficient IRIS Recognition Through Improvement of Feature Extraction and subset Selection", International Journal of Computer Science and Information Security (IJCSIS), Vol. 2, No.1, June 2009.
- [14] R.R. Isnanto, Suhardjo, and A. Susanto A, "Constructing New Biorthogonal Wavelet Type which Matched for Extracting the Iris Image Features", *Journal of Physics: Conference Series*, vol. 423, no. 012020, ISSN 1742-6596 (Online). <http://iopscience.iop.org/1742-6596/423/1/012020>, 2013.
- [15] Du, Y., B. Boney, R. Ives, D. Etter, and R. Schultz, 2005, *Analysis of Partial Iris Recognition using a 1-D Approach*, *IEEE ICASSP 2005*, pp. II-961 – II-964.

# Effect of Wavelet-transformed Iris Image Translation and Rotation on its Recognition Rate (An Experimental Approach using Haar Wavelet)

ORIGINALITY REPORT

%**5**

SIMILARITY INDEX

%**1**

INTERNET SOURCES

%**5**

PUBLICATIONS

%**0**

STUDENT PAPERS

PRIMARY SOURCES

**1**

Xiaofu He. "Extraction of complex wavelet features for iris recognition", 2008 19th International Conference on Pattern Recognition, 12/2008

Publication

%**2**

**2**

Chandrashekar M. Patil. "Iris Feature Extraction for Personal Identification Using Lifting Wavelet Transform", 2009 International Conference on Advances in Computing Control and Telecommunication Technologies, 12/2009

Publication

%**2**

**3**

[www.docstoc.com](http://www.docstoc.com)

Internet Source

%**1**

**4**

Hussein, Sherif E., Osama A. Hassan, and Malcolm H. Granat. "Assessment of the potential iridology for diagnosing kidney disease using wavelet analysis and neural networks", Biomedical Signal Processing and Control, 2013.

Publication

%**1**

---

EXCLUDE QUOTES    OFF

EXCLUDE MATCHES    < 1%

EXCLUDE  
BIBLIOGRAPHY    ON